

CONTENTS



FLEXIBLE AIR DUCTS

Green Series Flexible Air Ducts	22
Anti-microbial Flexible Air Ducts.....	28
Aluminium Flexible Air Ducts	34
Non-Woven Flexible Air Ducts	54
Aluminium & PVC Combined Flexible Air Ducts	56
PVC Flexible Air Ducts	64
PE Flexible Air Ducts.....	76
Polyester Flexible Air Ducts	80
Semi Flexible Air Ducts	86
Sound Attenuators	90
Duct Insulation Sleeve	102



INDUSTRIAL HOSES

TPU Industrial Hoses	106
Industrial PVC Flexible Air Ducts	108



VENTILATION EQUIPMENT

Air Disc Valves	112
Versatile Smart Series	116
Grills & Diffusers.....	119



MONTAGE & FITTING ELEMENTS

Flexible Connectors	126
Self Adhesive Pin	130
Montage Elements	132
Air Control Equipment.....	136
Air Duct Equipment.....	138



HEAT & ENERGY RECOVERY UNITS

RECOPLUS Energy Recovery Unit.....	148
RECO Heat Recovery Unit.....	152



TECHNICAL DETAILS

Standard Flexible Air Duct Dimensions	158
Standard TPU Industrial Hose Dimensions	159
Standard Rectangular Flexible Air Duct Dimensions	160
Circular Equivalent of Rectangular Ducts	161
Insertion Loss Diagrams	162
Transmission Loss Diagrams	170
Pressure Loss Diagrams	178
Chemical Resistance of TPU Industrial Hose	185



INSTALLATION GUIDE

Installation of Flexible Air Ducts.....	188
Montage of P Smart Air Disc Valves	196



PACKING INFORMATION

ALUAFS	198
ISOAFS-ALU	200
SONOAFS-ALU.....	202
ISO/SONOAFS-ALU 50 MM	204
COMBIAFS.....	206

GREEN SERIES FLEXIBLE AIR DUCTS



22



ALUAFS GREEN

Eco Friendly Non-insulated Aluminium Flexible Air Ducts



24



ISOAFS-ALU GREEN

Eco Friendly Thermally Insulated Aluminium Flexible Air Ducts



26



SONOAFS-ALU GREEN

Eco Friendly Thermally & Acoustically Insulated Aluminium Flexible Air Ducts

ANTI-MICROBIAL FLEXIBLE AIR DUCTS



28

ALUAFS HYGIENE


Non-insulated Aluminium Hygiene Flexible Air Ducts



30

ISOAFS-ALU HYGIENE

Thermally Insulated Aluminium Hygiene Flexible Air Ducts



32

SONOAFS-ALU HYGIENE

Thermally & Acoustically Insulated Aluminium Hygiene Flexible Air Ducts

ALUMINIUM FLEXIBLE AIR DUCTS



34



ALUAFS UL

Non-insulated UL Listed Aluminium Flexible Air Connectors



36

ALUAFS

Non-insulated Aluminium Flexible Air Ducts



38

ALUAFS FORTE

Non-insulated Aluminium Negative Pressure Competent Flexible Air Ducts



40

ALUAFS RECTANGULAR

Non-insulated Aluminium Rectangular Flexible Air Ducts



42

ISOAFS-ALU

Thermally Insulated Aluminium Flexible Air Ducts



44

ISOAFS-ALU FORTE

Thermally Insulated Aluminium Negative Pressure Competent Flexible Air Ducts



46

ISOAFS-ALU RECTANGULAR

Thermally Insulated Aluminium Rectangular Flexible Air Ducts



48

SONOAFS-ALU

Thermally & Acoustically Insulated Aluminium Flexible Air Ducts



50

SONOAFS-ALU FORTE

Thermally & Acoustically Insulated Aluminium
Negative Pressure Competent Flexible Air Ducts



52

SONOAFS-ALU PLUS

Thermally & Acoustically Insulated Aluminium
Flexible Air Ducts

NONWOVEN FLEXIBLE AIR DUCTS



54

SONOAFS-NW

Thermally & Acoustically Insulated Nonwoven
Flexible Air Ducts

ALUMINIUM & PVC COMBINED FLEXIBLE AIR DUCTS



56

COMBIAFS

Aluminium & PVC Combined
Flexible Air Ducts



58

COMBIAFS FORTE

Aluminium & PVC Combined
Negative Pressure Competent Flexible Air Ducts



60

COMBIAFS RECTANGULAR

Aluminium & PVC Combined Rectangular
Flexible Air Ducts



62

ISOAFS-COMBI

Thermally Insulated Aluminium & PVC Combined
Flexible Air Ducts

PVC FLEXIBLE AIR DUCTS



64

VINYLAFS

Non-insulated PVC Flexible Air Ducts



66

PVCAFS

Non-insulated Reinforced PVC
Flexible Air Ducts



68

PVCAFS.M1

Non-insulated Reinforced PVC
Flexible Air Ducts



70

PVCAFS-HEAVY

Non-insulated Industrial Reinforced PVC
Flexible Air Ducts



72

ISOAFS-VINYL

Thermally Insulated PVC
Flexible Air Ducts



74

ISOAFS-PVC

Thermally Insulated Reinforced PVC
Flexible Air Ducts

PE FLEXIBLE AIR DUCTS



76

PEAFS

Non-insulated PE Flexible Air Ducts



78

ISOAFS-PE

Thermally Insulated PE Flexible Air Ducts

POLYESTER FLEXIBLE AIR DUCTS



80

POLYAFS

Non-insulated Polyester Flexible Air Ducts



82

ISOAFS-POLY

Thermally Insulated Polyester Flexible Air Ducts



84

ISOAFS-POLY.181

Thermally Insulated Polyester Flexible Air Ducts (UL 181 CLASS 1 CERTIFIED)

SEMI FLEXIBLE AIR DUCTS



86

SEMIAFS

Aluminium Semi Flexible Air Ducts



88

SEMIAFS-INOX

Stainless Steel Semi Flexible Air Ducts

SOUND ATTENUATORS



90

ACOUSTIC SEMIAFS

Thermally & Acoustically Insulated Aluminium Semi Flexible, Ends Finished, Sound Attenuators



92

SOUNDROPAFS

Thermally & Acoustically Insulated Aluminium Semi Flexible, Ends Collar Finished, Sound Attenuators



94

SOUNDROPAFS-NW

Thermally & Acoustically Insulated Nonwoven Flexible, Ends Collar Finished, Sound Attenuators



96

SILENCERAFS

Thermally & Acoustically Insulated Aluminium Flexible, Ends Finished, Sound Attenuators



98

SILENCERAFS PLUS

Thermally & Acoustically Insulated Aluminium Flexible, Ends Collar Finished, Sound Attenuators



100

PHONIC SEMIAFS

Thermally & Acoustically Insulated Aluminium Semi Flexible, Sound Attenuators

DUCT INSULATION SLEEVES



102

SLEEVEAFS

Air Duct Insulation Material

INDUSTRIAL HOSES



106

AFSTPU

Industrial Polyurethane Hoses



108

VINYLAFS-TRANSPARENT

Non-insulated Industrial PVC Flexible Air Ducts

AIR DISC VALVES



112

EXHAUST METAL AIR DISC VALVES



113

SUPPLY METAL AIR DISC VALVES



114

P SMART AIR DISC VALVES



115

PLASTIC AIR DISC VALVES

VERSATILE SMART SERIES



116

L SMART LINEAR GRILL



117

G SMART GRAVITY LOUVER



118

C SMART COWL OUTLET

GRILLS & DIFFUSERS



119

CEILING DIFFUSERS



120

COWL OUTLET
With Adjustable Collar



121

LINEAR GRILLS
With Adjustable Collar



122

GRAVITY LOUVERS
With 4 Set Collar



123

GRAVITY LOUVERS
With Adjustable Collar



124

DOOR TRANSFER GRILLS

FLEXIBLE CONNECTORS



126

AFSCONNECTOR
Flexible Duct Connector



128

AFS CIRCULAR PU CONNECTOR KIT
Sleeve Connector - PU Coated Fiber Glass Fabric

AIR CONTROL EQUIPMENT



136

ROUND AIR DAMPER



137

METAL BACK DRAUGHT SHUTTER

SELF ADHESIVE PIN



130

AFS PIN
Self Adhesive Stuck Up Pin



137

PLASTIC BACK DRAUGHT SHUTTER

MONTAGE ELEMENTS



132

AFS TAPE
Self Adhesive Aluminium Foil Tape



134

NYLON CLAMPS & PLIERS

AIR DUCT EQUIPMENT



138

FLANGE PROFILES



138

PERFORATED L PROFILES




135

METAL CLAMPS
Strip Steel Banding System & Locking Devices



136

DUCT COLLAR



139

SELF DRILLING SCREWS



139

CORNER ELEMENTS



AIR DUCT EQUIPMENT



140

G CLAMPS



140

BEAM CLAMPS



142

STEEL ANCHORS



143

GASKET TAPE



141

BOLTS & NUTS



141

EXTENSION NUTS



143

MASTIC & SILICONE



144

DAMPER QUADRANT



142

HANGING ELEMENTS



142

HANGING RODS



ENERGY & HEAT RECOVERY UNIT



148


VANTILA RECOPLUS
Energy Recovery Unit



152


VANTILA RECO
Heat Recovery Unit

TECHNICAL INFORMATION

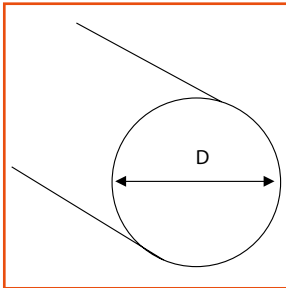


158

STANDARD FLEXIBLE AIR DUCT DIMENSIONS

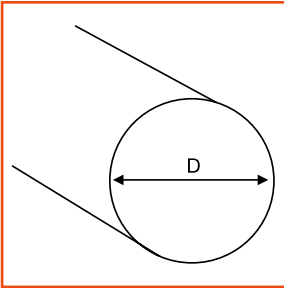


159

STANDARD TPU INDUSTRIAL HOSE DIMENSIONS

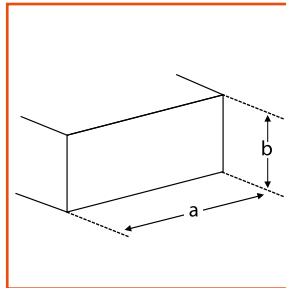


160

STANDARD RECTANGULAR FLEXIBLE AIR DUCT DIMENSIONS

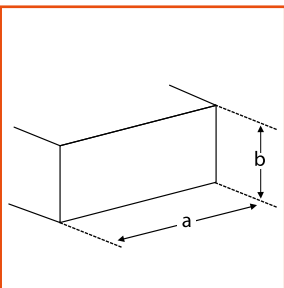


161

CIRCULAR EQUIVALENT OF RECTANGULAR DUCT

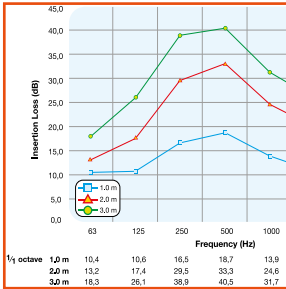


162

INSERTION LOSS DIAGRAMS

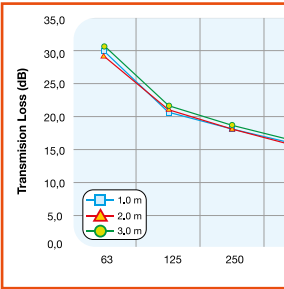

170

TRANSMISSION LOSS DIAGRAMS

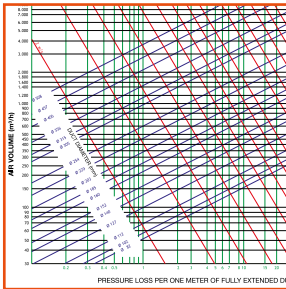

178

PRESURE LOSS DIAGRAMS

Chemical	Temperature, °C	SMFL
Acetone	RT	
Alcohol, aqueous, 5 %	RT	
Ammonia, 10 %	RT	
Aniline	RT	
Bitum. oil	RT	
Butadiene	RT	
Butanol	RT	
Butyl acetate	RT	
Cyclohexane	RT	
Diesel oil	RT	
Dimethyl formamide	RT	
Fluorine, aqueous, 5 %	RT	
Glycol	RT	
Ethyl alcohol	RT	
Ethyl ether	RT	
Acetic acid, 20 %	RT	

185


CHEMICAL RESISTANCE OF TPU INDUSTRIAL HOSE

INSTALLATION GUIDE

Ø DUCT DIA. (mm)
Ø 254
Ø 305
Ø 315
Ø 356


188

CHOOSING THE RIGHT DIAMETER

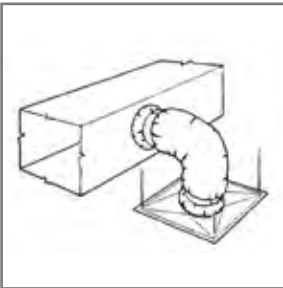


189

THE INSTALLATION LENGTH OF AFS FLEXIBLE AIR DUCTS




190

SUPPORTING FLEXIBLE AIR DUCT



192


STEP BY STEP INSTRUCTIONS

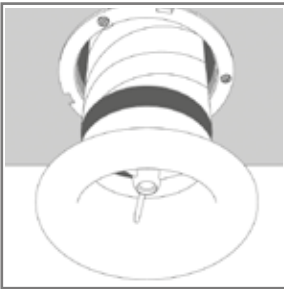

196

P SMART AIR DISC VALVE INSTALLATION GUIDE

PACKING INFORMATION



198



FLEXIBLE AIR DUCTS





ECO FRIENDLY NON-INSULATED ALUMINIUM
FLEXIBLE AIR DUCTS



TYPES:

ALUAFS.70 GREEN
(M1, difficult to ignite)

ALUAFS.F GREEN
(M0, limited combustibility)

ALUAFS.70 GREEN UL
(M1, difficult to ignite)



ALUAFS GREEN

AFS proudly introduces innovative, low emitting, GREEN Series products certified by **UL Environment Greenguard Certification** program. The Green movement of AFS aims to improve indoor air quality and also reduce people’s exposure to chemicals and other pollutants. AFS puts an extensive effort to develop GREEN Series, which stringently certified by **UL Environment**.

AFS GREEN Series products achieve stricter certification criteria and are marked as **“UL GREENGUARD GOLD Certified”** and referenced by both Collaborative for High Performance Schools (CHPS) and Leadership in Energy and Environmental Design (LEED) Building Rating systems. All AFS GREEN products are tested and retested periodically to ensure compliance with UL GREENGUARD Certification’s rigorous indoor air quality standards. New AFS Green Series Flexible Air Ducts can be found in the free online UL GREENGUARD Product Guide. (www.greenguard.org)

Why Indoor Air Quality?

We spend about 90% of our time indoors, where air can be 2 to 5 times more polluted than outdoor air. Interior products have significant impact on indoor air quality and can emit hundreds of chemicals into the air that building occupants breathe. The particular substances known as Volatile Organic Compounds (VOCs) are released into the air from everyday furnishings, building materials and products. Once airborne, VOCs are inhaled by building occupants triggers numerous health problems.

Infants and children at school age are more sensitive to the effects of VOCs and poor indoor air quality. Children are breathing more air while their immune and neurological systems are still developing. Children are exposed to high levels of VOCs are four times more likely to develop asthma.

Indoor Air Pollution Leads To Health Consequences

- Asthma and allergies
- Neurological diseases
- Headache
- Cardiovascular diseases
- Eye, nose & throat irritation
- Respiratory diseases
- Reproductive & development defects
- Some forms of cancer

TECHNICAL PROPERTIES

TYPE	ALUAFS.70 GREEN	ALUAFS.70 GREEN UL	ALUAFS.F GREEN
Fire Resistance	Difficult to ignite	Difficult to ignite	Limited combustibility
Construction	3 ply aluminium 2 ply polyester	3 ply aluminium 2 ply polyester	3 ply aluminium 1 ply polyester
Nominal Thickness	70 micron	70 micron	74 micron
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 102 mm – Ø 254 mm	Ø 82 mm – Ø 800 mm
Temperature Range	-30 °C / +150 °C	-30 °C / +150 °C	-30 °C / + 250 °C
Air Velocity	30 m/s (max)	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)	3000 Pa (max)
Standard Length	10 m	10 m	10 m
Packing	Single cardboard box	Single cardboard box	Single cardboard box

FIRE CERTIFICATES

United Kingdom (EN 13501-1)		Class B - s1, d0	
Europe		EN ISO 11925-2 small flame test (ignitability) report	EN ISO 1716 gross calorific value test report
France		M1	M0

CERTIFICATES

USA (UL 181)			
TÜV SÜD		95 / 28 / EC	
Russia		GOST-R	GOST-R

GREENGUARD GOLD EMISSION CRITERIA

Individual VOCs*	≤ 1/100 TLV & ≤ ½ CA CREL
Formaldehyde	≤ 7.3 ppb
Total VOC*	≤ 0.22 mg/m³
Total Aldehydes	≤ 0.043 ppm / 43 ppb
Total Phthalates	≤ 0.01 mg/m³
Total Particles	≤ 0.02 mg/m³

* Volatile Organic Compound





TYPES:

ISOAFS-ALU.70 GREEN
(M1, difficult to ignite)

ISOAFS-ALU.F GREEN
(M0+M1, limited combustibility
+ difficult to ignite)

ISOAFS-ALU GREEN

AFS proudly introduces innovative, low emitting, GREEN Series products certified by **UL Environment Greenguard Certification** program. The Green movement of AFS aims to improve indoor air quality and also reduce people's exposure to chemicals and other pollutants. AFS puts an extensive effort to develop GREEN Series, which stringently certified by **UL Environment**.

AFS GREEN Series products achieve stricter certification criteria and are marked as **"UL GREENGUARD GOLD Certified"** and referenced by both Collaborative for High Performance Schools (CHPS) and Leadership in Energy and Environmental Design (LEED) Building Rating systems. All AFS GREEN products are tested and retested periodically to ensure compliance with UL GREENGUARD Certification's rigorous indoor air quality standards. New AFS Green Series Flexible Air Ducts can be found in the free online UL GREENGUARD Product Guide. (www.greenguard.org)

Why Indoor Air Quality?

We spend about 90% of our time indoors, where air can be 2 to 5 times more polluted than outdoor air. Interior products have significant impact on indoor air quality and can emit hundreds of chemicals into the air that building occupants breathe. The particular substances known as Volatile Organic Compounds (VOCs) are released into the air from everyday furnishings, building materials and products. Once airborne, VOCs are inhaled by building occupants triggers numerous health problems.

Infants and children at school age are more sensitive to the effects of VOCs and poor indoor air quality. Children are breathing more air while their immune and neurological systems are still developing. Children are exposed to high levels of VOCs are four times more likely to develop asthma.

Indoor Air Pollution Leads To Health Consequences

- ✦ Asthma and allergies
- ✦ Headache
- ✦ Eye, nose & throat irritation
- ✦ Reproductive & development defects
- ✦ Neurological diseases
- ✦ Cardiovascular diseases
- ✦ Respiratory diseases
- ✦ Some forms of cancer

TECHNICAL PROPERTIES

TYPE	ISOAFS-ALU.70 GREEN	ISOAFS-ALU.F GREEN
Fire Resistance	Difficult to ignite	Limited combustibility + Difficult to ignite
Inner Duct Construction	3 ply aluminium + 2 ply polyester	3 ply aluminium + 1 ply polyester
Jacket Construction	1 ply aluminium + 2 ply polyester	1 ply aluminium + 2 ply polyester
Nominal Thickness (Inner Duct / Jacket)	70 micron / 45 micron	74 micron / 45 micron
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 82 mm – Ø 800 mm
Temperature Range	-30 °C / +150 °C	-30 °C / + 250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATES

France	M1	M0 + M1
Europe		EN ISO 1716 (inner duct) gross calorific value test report

CERTIFICATES

Russia	PG GOST-R	GOST-R
--------	-----------	--------

GREENGUARD GOLD EMISSION CRITERIA

Individual VOCs*	≤ 1/100 TLV & ≤ ½ CA CREL
Formaldehyde	≤ 7.3 ppb
Total VOC*	≤ 0.22 mg/m³
Total Aldehydes	≤ 0.043 ppm / 43 ppb
Total Phthalates	≤ 0.01 mg/m³
Total Particles	≤ 0.02 mg/m³

* Volatile Organic Compound





TYPES:

SONOAFS-ALU.70 GREEN
(M1, difficult to ignite)

SONOAFS-ALU.F GREEN
(M0+M1, limited combustibility
+ difficult to ignite)

SONOAFS-ALU GREEN

AFS proudly introduces innovative, low emitting, GREEN Series products certified by **UL Environment Greenguard Certification** program. The Green movement of AFS aims to improve indoor air quality and also reduce people's exposure to chemicals and other pollutants. AFS puts an extensive effort to develop GREEN Series, which stringently certified by **UL Environment**.

AFS GREEN Series products achieve stricter certification criteria and are marked as **"UL GREENGUARD GOLD Certified"** and referenced by both Collaborative for High Performance Schools (CHPS) and Leadership in Energy and Environmental Design (LEED) Building Rating systems. All AFS GREEN products are tested and retested periodically to ensure compliance with UL GREENGUARD Certification's rigorous indoor air quality standards. New AFS Green Series Flexible Air Ducts can be found in the free online UL GREENGUARD Product Guide. (www.greenguard.org)

Why Indoor Air Quality?

We spend about 90% of our time indoors, where air can be 2 to 5 times more polluted than outdoor air. Interior products have significant impact on indoor air quality and can emit hundreds of chemicals into the air that building occupants breathe. The particular substances known as Volatile Organic Compounds (VOCs) are released into the air from everyday furnishings, building materials and products. Once airborne, VOCs are inhaled by building occupants triggers numerous health problems.

Infants and children at school age are more sensitive to the effects of VOCs and poor indoor air quality. Children are breathing more air while their immune and neurological systems are still developing. Children are exposed to high levels of VOCs are four times more likely to develop asthma.

Indoor Air Pollution Leads To Health Consequences

- Asthma and allergies
- Headache
- Eye, nose & throat irritation
- Reproductive & development defects
- Neurological diseases
- Cardiovascular diseases
- Respiratory diseases
- Some forms of cancer

TECHNICAL PROPERTIES

TYPE	SONOAFS-ALU.70 GREEN	SONOAFS-ALU.F GREEN
Fire Resistance	Difficult to ignite	Limited combustibility + Difficult to ignite
Inner Duct Construction	3 ply aluminium + 2 ply polyester (Perforated)	3 ply aluminium + 1 ply polyester (Perforated)
Jacket Construction	1 ply aluminium + 2 ply polyester	1 ply aluminium + 2 ply polyester
Nominal Thickness (Inner Duct / Jacket)	70 micron / 45 micron	74 micron / 45 micron
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 82 mm – Ø 800 mm
Temperature Range	-30 °C / +150 °C	-30 °C / + 250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATES

France	M1	M0 + M1
Europe		EN ISO 1716 (inner duct) gross calorific value test report

CERTIFICATES

Russia	PC GOST-R	GOST-R
--------	-----------	--------

GREENGUARD GOLD EMISSION CRITERIA

Individual VOCs*	≤ 1/100 TLV & ≤ ½ CA CREL
Formaldehyde	≤ 7.3 ppb
Total VOC*	≤ 0.22 mg/m³
Total Aldehydes	≤ 0.043 ppm / 43 ppb
Total Phthalates	≤ 0.01 mg/m³
Total Particles	≤ 0.02 mg/m³

* Volatile Organic Compound





TYPES:
ALUAFS HYGIENE
ALUAFS.F HYGIENE

ALUAFS HYGIENE


ANTI-MICROBIAL NANO TECHNOLOGY

The existence of microorganisms, such as mold, mildew, and bacteria has been well documented in ventilation systems. Humid and dark ambient of ventilation systems represent suitable environment for microbial growth.

The exposure through breathing of indoor air can lead to respiratory problems, infectious diseases or other allergic reactions and other various human health effects.

AFS has come up with a new hygienic solution, developed with state of the art technology. It will be the major component of safe ventilation systems that protects your indoor air quality.

- Anti-Microbial nano-sized silver particles are encapsulated in a polymer capsule.
- Nano-sized polymer capsules;
- Safe and healthy anti-microbial agent,
- Strongly anti-bacterial,
- Strongly anti-fungal,
- Totally ecological, nontoxic, no odor and harmful effects on environment,
- Activated by Catalytic Mechanism,
- There is no release of silver ions on the surface, long-lasting antimicrobial performance...

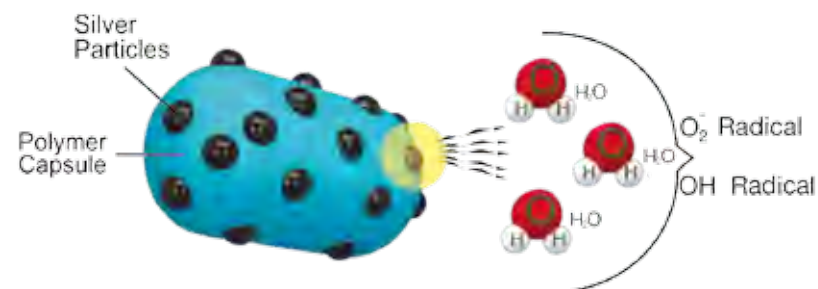

Catalytic Mechanism

Silver atoms radiate energy in narrow wavelengths which lead to formation of O_2^- and OH radicals that terminate the pathogens. As there is no specific killing mechanisms for pathogens in this catalytic mechanism, microorganisms cannot develop immunity against the antimicrobial capsules.

TECHNICAL PROPERTIES

TYPE	ALUAFS HYGIENE	ALUAFS.F HYGIENE
Construction	3 ply aluminium 2 ply polyester	3 ply aluminium 1 ply polyester
Nominal Thickness	70 micron	74 micron
Available diameters	Ø 102 mm - Ø 800 mm	Ø 102 mm - Ø 800 mm
Temperature range	-30 °C / +150 °C	-30 °C / +150 °C
Air velocity	30 m/s (max)	30 m/s (max)
Operating pressure	3000 Pa (max)	3000 Pa (max)
Standard length	10 m	10 m
Packing	Single cardboard box	Single cardboard box
FIRE CERTIFICATE		
France	M1	

ANTI-MICROBIAL CAPACITY

Silver has a long history as a natural antimicrobial agent in human health care. Based on many scientific experiments, silver particles are effective for over 600 microorganism species. However, all nano-silver technologies do not have the same anti-microbial effectiveness. AFS HYGIENE Flexible Air Ducts are produced with the latest Anti-Microbial Silver technology in order to obtain maximum anti-microbial capacity, healthy and ecological solution.

									
Microorganisms	<i>E. coli</i>	<i>P. Aeruginosa</i>	<i>Legionella Pneumophila</i>	<i>S. Aureus</i>	<i>Aspergillus Niger</i>	<i>Paecilomyces Variotti</i>	<i>Chaetomium Globosum</i>	<i>Gliocladium Virens</i>	<i>Aureobasidium Pullulans</i>
Type	Gram (-) bacteria	Gram (-) bacteria	Gram (-) bacteria	Gram (+) bacteria	Mold (fungus)	Mold (fungus)	Mold (fungus)	Mold (fungus)	Mold (fungus)
Test	ISO 22196	ISO 22196	ISO 22196	ISO 22196	ASTM G21	ASTM G21	ASTM G21	ASTM G21	ASTM G21
Antimicrobial Performance	> 99.99 % reduction					0 growth			
Certified by	IMSL (UK), EurofinsLab (Italy), Fiti Testing & Research Institute (Korea)								



TYPES:
ISOAFS-ALU HYGIENE
ISOAFS-ALU.F HYGIENE

NO-CONDENSATION

ISOAFS-ALU HYGIENE


ANTI-MICROBIAL NANO TECHNOLOGY

The existence of microorganisms, such as mold, mildew, and bacteria has been well documented in ventilation systems. Humid and dark ambient of ventilation systems represent suitable environment for microbial growth.

The exposure through breathing of indoor air can lead to respiratory problems, infectious diseases or other allergic reactions and other various human health effects.

AFS has come up with a new hygienic solution, developed with state of the art technology. It will be the major component of safe ventilation systems that protects your indoor air quality.

- Anti-Microbial nano-sized silver particles are encapsulated in a polymer capsule.
- Nano-sized polymer capsules;
- Safe and healthy anti-microbial agent,
- Strongly anti-bacterial,
- Strongly anti-fungal,
- Totally ecological, nontoxic, no odor and harmful effects on environment,
- Activated by Catalytic Mechanism,
- There is no release of silver ions on the surface, long-lasting antimicrobial performance...

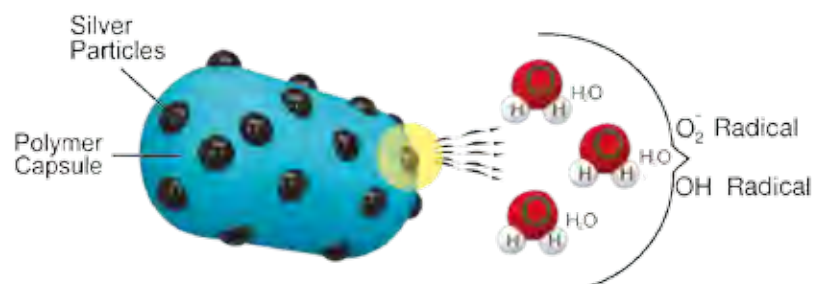

Catalytic Mechanism

Silver atoms radiate energy in narrow wavelengths which lead to formation of O_2^- and OH radicals that terminate the pathogens. As there is no specific killing mechanisms for pathogens in this catalytic mechanism, microorganisms can't develop immunity against the anti-microbial capsules.

TECHNICAL PROPERTIES

TYPE	ISOAFS-ALU HYGIENE	ISOAFS-ALU.F HYGIENE
Inner Duct Construction	3 ply aluminium + 2 ply polyester	3 ply aluminium + 1 ply polyester
Jacket Construction	1 ply aluminium + 2 ply polyester	1 ply aluminium + 2 ply polyester
Nominal Thickness (Inner Duct / Jacket)	70 micron / 45 micron	74 micron / 45 micron
Available diameters	Ø 102 mm - Ø 800 mm	Ø 102 mm - Ø 800 mm
Temperature range	-30 °C / +150 °C	-30 °C / +150 °C
Air velocity	30 m/s (max)	30 m/s (max)
Operating pressure	3000 Pa (max)	3000 Pa (max)
Insulation	glass wool --- white polyester	glass wool --- white polyester
Insulation density	16 kg/m ³ --- 10 kg/m ³	16 kg/m ³ --- 10 kg/m ³
Thickness of insulation	25 mm	25 mm
Standard length	10 m	10 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

France

M1

ANTI-MICROBIAL CAPACITY

Silver has a long history as a natural antimicrobial agent in human health care. Based on many scientific experiments, silver particles are effective for over 600 microorganism species. However, all nano-silver technologies do not have the same anti-microbial effectiveness. AFS HYGIENE Flexible Air Ducts are produced with the latest Anti-Microbial Silver technology in order to obtain maximum anti-microbial capacity, healthy and ecological solution.

									
Microorganisms	<i>E. coli</i>	<i>P. Aeruginosa</i>	<i>Legionella Pneumophila</i>	<i>S. Aureus</i>	<i>Aspergillus Niger</i>	<i>Paecilomyces Variotti</i>	<i>Chaetomium Globosum</i>	<i>Gliocladium Virens</i>	<i>Aureobasidium Pullulans</i>
Type	Gram (-) bacteria	Gram (-) bacteria	Gram (-) bacteria	Gram (+) bacteria	Mold (fungus)	Mold (fungus)	Mold (fungus)	Mold (fungus)	Mold (fungus)
Test	ISO 22196	ISO 22196	ISO 22196	ISO 22196	ASTM G21	ASTM G21	ASTM G21	ASTM G21	ASTM G21
Antimicrobial Performance	> 99.99 % reduction					0 growth			
Certified by	IMSL (UK), EurofinsLab (Italy), Fiti Testing & Research Institute (Korea)								



TYPES:
SONOAFS-ALU HYGIENE
SONOAFS-ALU.F HYGIENE

NO-CONDENSATION

SONOAFS-ALU HYGIENE


ANTI-MICROBIAL NANO TECHNOLOGY

The existence of microorganisms, such as mold, mildew, and bacteria has been well documented in ventilation systems. Humid and dark ambient of ventilation systems represent suitable environment for microbial growth.

The exposure through breathing of indoor air can lead to respiratory problems, infectious diseases or other allergic reactions and other various human health effects.

AFS has come up with a new hygienic solution, developed with state of the art technology. It will be the major component of safe ventilation systems that protects your indoor air quality.

- Anti-Microbial nano-sized silver particles are encapsulated in a polymer capsule.
- Nano-sized polymer capsules;
- Safe and healthy anti-microbial agent,
- Strongly anti-bacterial,
- Strongly anti-fungal,
- Totally ecological, nontoxic, no odor and harmful effects on environment,
- Activated by Catalytic Mechanism,
- There is no release of silver ions on the surface, long-lasting antimicrobial performance...

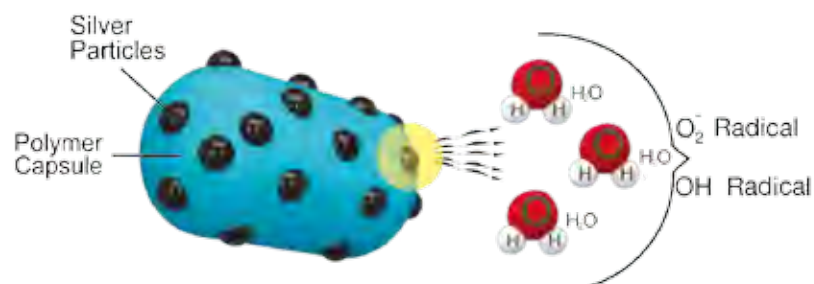

Catalytic Mechanism

Silver atoms radiate energy in narrow wavelengths which lead to formation of O_2^- and OH radicals that terminate the pathogens. As there is no specific killing mechanisms for pathogens in this catalytic mechanism, microorganisms cannot develop immunity against the antimicrobial capsules.

TECHNICAL PROPERTIES

TYPE	SONOAFS-ALU HYGIENE	SONOAFS-ALU.F HYGIENE
Inner Duct Construction	3 ply aluminium + 2 ply polyester (Perforated)	3 ply aluminium + 1 ply polyester (Perforated)
Jacket Construction	1 ply aluminium + 2 ply polyester	1 ply aluminium + 2 ply polyester
Nominal Thickness (Inner Duct / Jacket)	70 micron / 45 micron	74 micron / 45 micron
Available diameters	Ø 102 mm - Ø 800 mm	Ø 102 mm - Ø 800 mm
Temperature range	-30 °C / +150 °C	-30 °C / +150 °C
Air velocity	30 m/s (max)	30 m/s (max)
Operating pressure	3000 Pa (max)	3000 Pa (max)
Insulation	glass wool --- white polyester	glass wool --- white polyester
Insulation density	16 kg/m ³ --- 10 kg/m ³	16 kg/m ³ --- 10 kg/m ³
Thickness of insulation	25 mm	25 mm
Standard length	10 m	10 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

France M1

ANTI-MICROBIAL CAPACITY

Silver has a long history as a natural antimicrobial agent in human health care. Based on many scientific experiments, silver particles are effective for over 600 microorganism species. However, all nano-silver technologies do not have the same anti-microbial effectiveness. AFS HYGIENE Flexible Air Ducts are produced with the latest Anti-Microbial Silver technology in order to obtain maximum anti-microbial capacity, healthy and ecological solution.

									
Microorganisms	<i>E. coli</i>	<i>P. Aeruginosa</i>	<i>Legionella Pneumophila</i>	<i>S. Aureus</i>	<i>Aspergillus Niger</i>	<i>Paecilomyces Variotti</i>	<i>Chaetomium Globosum</i>	<i>Gliocladium Virens</i>	<i>Aureobasidium Pullulans</i>
Type	Gram (-) bacteria	Gram (-) bacteria	Gram (-) bacteria	Gram (+) bacteria	Mold (fungus)	Mold (fungus)	Mold (fungus)	Mold (fungus)	Mold (fungus)
Test	ISO 22196	ISO 22196	ISO 22196	ISO 22196	ASTM G21	ASTM G21	ASTM G21	ASTM G21	ASTM G21
Antimicrobial Performance	> 99.99 % reduction				0 growth				
Certified by	IMSL (UK), EurofinsLab (Italy), Fiti Testing & Research Institute (Korea)								

NON-INSULATED ALUMINIUM FLEXIBLE AIR DUCTS



ALUAFS.70 UL

- ALUAFS.70 UL non-insulated aluminium flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- Airtight ALUAFS.70 UL is produced from multi-layer aluminium and polyester, strengthened with high tension hard steel spring wire.
- ALUAFS.70 UL has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of ALUAFS.70 UL has been tested and certified by various international bodies. In case of fire, no toxic or poisonous gases are released.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED BODY

- Difficult to ignite (ALUAFS.70 UL)
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High resistance
- High resistance to deformation
- Easy to install

TECHNICAL PROPERTIES

TYPE	ALUAFS.70 UL
Fire Resistance	Difficult to ignite
Construction	3 ply aluminium 2 ply polyester
Nominal Thickness	70 micron
Available Diameters	Ø 102 mm – Ø 254 mm
Temperature Range	-30 °C / +150 °C
Air Velocity	30 m/s (max)
Operating Pressure	3000 Pa (max)
Standard Length	10 m
Packing	Single cardboard box

CERTIFICATE

USA (UL 181)



Available on request

- Customized lengths
- Private label



TYPES:
ALUAFS.70
 (M1, difficult to ignite)
ALUAFS.F
 (M0, limited combustibility)

ALUAFS

- ALUAFS non-insulated aluminium flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- Airtight ALUAFS is produced from multi-layer aluminium and polyester, strengthened with high tension hard steel spring wire.
- ALUAFS has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of ALUAFS has been tested and certified by various international bodies. In case of fire, no toxic or poisonous gases are released.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED BODY

- Difficult to ignite (ALUAFS.70)
- Limited combustibility (ALUAFS.F)
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High resistance
- High resistance to deformation
- Easy to install

TECHNICAL PROPERTIES

TYPE	ALUAFS.70	ALUAFS.F
Fire Resistance	Difficult to ignite	Limited combustibility
Construction	3 ply aluminium 2 ply polyester	3 ply aluminium 1 ply polyester
Nominal Thickness	70 micron	74 micron
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 82 mm – Ø 800 mm
Temperature Range	-30 °C / +150 °C	-30 °C / + 250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

France		M1	M0
United Kingdom (BS 476 Part 6&7)	Exova	Class 0	
Italy	CSI	Class 1	
Switzerland	swiss		6q3
United Kingdom (EN 13501-1)	Exova	Class B - s1, d0	
Europe		EN ISO 11925-2 small flame test (ignitability) test report EN 13823 single burning item (SBI) test report	EN ISO 1716 gross calorific value test report

CERTIFICATE

Russia	PC	GOST-R	GOST-R
USA	Intertek	Puncture test per UL 181	
USA	Intertek	10 000 Pa (max) @ Ø 102 mm Positive pressure test per UL 181	

Available on request

- Customized lengths
- Private label
- Net packing
- Plastic bag packing
- Bulk packing





TYPES:

ALUAFS.70 FORTE
(M1, difficult to ignite)

ALUAFS.F FORTE
(M0, limited combustibility)

ALUAFS FORTE

- ALUAFS FORTE non-insulated aluminium negative pressure competent flexible air ducts are specifically produced for medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- Airtight ALUAFS FORTE is produced from multi-layer aluminium and polyester, strengthened with high tension hard steel spring wire.
- ALUAFS FORTE has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of ALUAFS FORTE has been tested and certified by various international bodies. In case of fire, no toxic or poisonous gases are released.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED BODY

- Difficult to ignite (ALUAFS.70 FORTE)
- Limited combustibility (ALUAFS.F FORTE)
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

TECHNICAL PROPERTIES

TYPE	ALUAFS.70 FORTE	ALUAFS.F FORTE
Fire Resistance	Difficult to ignite	Limited combustibility
Construction	3 ply aluminium 2 ply polyester	3 ply aluminium 1 ply polyester
Nominal Thickness	70 micron	74 micron
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 82 mm – Ø 800 mm
Wire Pitch	18 mm (Ø ≥ 102 mm)	18 mm (Ø ≥ 102 mm)
Temperature Range	-30 °C / +150 °C	-30 °C / + 250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

Switzerland		6q3
France		M0
Europe		EN ISO 1716 gross calorific value test report

CERTIFICATE

Russia		GOST-R	GOST-R
--------	---	--------	--------

Available on request

- Customized lengths
- Private label
- Net packing
- Plastic bag packing
- Bulk packing



NON-INSULATED ALUMINIUM RECTANGULAR FLEXIBLE AIR DUCTS



TYPES:

ALUAFS.70 RECTANGULAR
(M1, difficult to ignite)

ALUAFS.F RECTANGULAR
(M0, limited combustibility)

ALUAFS RECTANGULAR

- ALUAFS RECTANGULAR non-insulated aluminium rectangular flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- They provide maximum cross sectional area at the minimum installation space.
- Airtight ALUAFS RECTANGULAR is produced from multi-layer aluminium and polyester, strengthened with high tension hard steel spring wire.
- ALUAFS RECTANGULAR is highly elastic, flexible and compressible. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of ALUAFS RECTANGULAR has been tested and certified by various international bodies. In case of fire, no toxic or poisonous gases are released.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED BODY

- Difficult to ignite (ALUAFS.70 RECTANGULAR)
- Limited combustibility (ALUAFS.F RECTANGULAR)
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Quick and easy installation
- Airtight
- Low operation and maintenance cost

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

TECHNICAL PROPERTIES

TYPE	ALUAFS.70 RECTANGULAR	ALUAFS.F RECTANGULAR
Fire Resistance	Difficult to ignite	Limited combustibility
Construction	3 ply aluminium 2 ply polyester	3 ply aluminium 1 ply polyester
Nominal Thickness	70 micron	74 micron
Cross Sectional Area Range	0.006 m ² – 0.38 m ²	0.006 m ² – 0.38 m ²
Temperature Range	-30 °C / +150 °C	-30 °C / + 250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box

CERTIFICATE

Russia	PC GOST-R	GOST-R
France		MO+M1
Europe		EN ISO 1716 (inner duct) gross calorific value test report

Available on request

- Customized lengths
- Private label
- Net packing
- Plastic bag packing
- Bulk packing

THERMALLY INSULATED ALUMINIUM FLEXIBLE AIR DUCTS



TYPES:

ISOAFS-ALU.70
(M1, difficult to ignite)

ISOAFS-ALU.F
(M0+M1, limited combustibility
+ difficult to ignite)

NO-CONDENSATION

ISOAFS-ALU

- ISOAFS-ALU thermally insulated aluminium flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- Airtight ISOAFS-ALU is produced from multi-layer aluminium and polyester, strengthened with high tension hard steel spring wire, surrounded with glass wool insulation and an aluminium vapour barrier.
- ISOAFS-ALU has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of ISOAFS-ALU has been tested and certified by various international bodies.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED BODY

- Difficult to ignite (ISOAFS-ALU.70)
- Limited combustibility + difficult to ignite (ISOAFS-ALU.F)
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- Airtight
- Low operation and maintenance cost

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1), UL 723 (Flame Spread index = 0) (Smoke Developed index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

ALUMINIUM LAMINATED JACKET

- Difficult to ignite (Certified)
- High resistance to wear and tear
- Impermeable to UV rays
- High resistance to UV rays
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	ISOAFS-ALU.70	ISOAFS-ALU.F
Fire Resistance	Difficult to ignite	Limited combustibility + Difficult to ignite
Inner Duct Construction	3 ply aluminium + 2 ply polyester	3 ply aluminium + 1 ply polyester
Jacket Construction	1 ply aluminium + 2 ply polyester	1 ply aluminium + 2 ply polyester
Nominal Thickness (Inner Duct / Jacket)	70 micron / 45 micron	74 micron / 45 micron
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 82 mm – Ø 800 mm
Temperature Range	-30 °C / +150 °C	-30 °C / + 250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Insulation / Thickness / Density	Glass wool / 25 mm / 16 kg/m³	Glass wool / 25 mm / 16 kg/m³
Thermal Conductivity	k = 0.037 W/mK	k = 0.037 W/mK
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

France	M1	M0 + M1
Italy	CSI Class 1	Class 0
Europe		EN ISO 1716 (inner duct) gross calorific value test report

CERTIFICATE

Russia	PC GOST-R	GOST-R
--------	-----------	--------

Available on request

- Customized lengths
- Private label
- White polyester insulation
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- PE jacket

Insulation Options Available



ALTERNATIVE CONSTRUCTIONS

Product Name	Difference from the standard type
ISOAFS-ALU.70-R6 ISOAFS-ALU.F-R6	R 6.0 glass wool insulation
ISOAFS-ALU.70-R8 ISOAFS-ALU.F-R8	R 8.0 glass wool insulation
ISOAFS-ALU.70-D24 ISOAFS-ALU.F-D24	24 kg/m³ glass wool insulation
ISOAFS-ALU.70-PE	1 ply PE jacket, in grey color
ISOAFS-ALU.70-W ISOAFS-ALU.F-W	White polyester insulation 25 mm in thickness 10 kg/m³ in density

THERMALLY INSULATED ALUMINIUM NEGATIVE PRESSURE COMPETENT FLEXIBLE AIR DUCTS



TYPES:

ISOAFS-ALU.70 FORTE
(M1, difficult to ignite)

ISOAFS-ALU.F FORTE
(M0+M1, limited combustibility
+ difficult to ignite)

NO-CONDENSATION

ISOAFS-ALU FORTE

- ISOAFS-ALU FORTE thermally insulated aluminium negative pressure competent flexible air ducts are specifically produced for medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- Airtight ISOAFS-ALU FORTE is produced from multi-layer aluminium and polyester, strengthened with high tension hard steel spring wire, surrounded with glass wool insulation and an aluminium vapour barrier.
- ISOAFS-ALU FORTE has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of ISOAFS-ALU FORTE has been tested and certified by various international bodies.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED BODY

- Difficult to ignite (ISOAFS-ALU.70 FORTE)
- Limited combustibility + difficult to ignite (ISOAFS-ALU.F FORTE)
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- Airtight
- Low operation and maintenance cost

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1), UL 723
- (Flame Spread index = 0)
- (Smoke Developed index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

ALUMINIUM LAMINATED JACKET

- Difficult to ignite (Certified)
- High resistance to wear and tear
- Impermeable to UV rays
- High resistance to UV rays
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	ISOAFS-ALU.70 FORTE	ISOAFS-ALU.F FORTE
Fire Resistance	Difficult to ignite	Limited combustibility + Difficult to ignite
Inner Duct Construction	3 ply aluminium + 2 ply polyester	3 ply aluminium + 1 ply polyester
Jacket Construction	1 ply aluminium + 2 ply polyester	1 ply aluminium + 2 ply polyester
Nominal Thickness (Inner Duct / Jacket)	70 micron / 45 micron	74 micron / 45 micron
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 82 mm – Ø 800 mm
Wire Pitch	18 mm (Ø ≥ 102 mm)	18 mm (Ø ≥ 102 mm)
Temperature Range	-30 °C / +150 °C	-30 °C / + 250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Insulation / Thickness / Density	Glass wool / 25 mm / 16 kg/m ³	Glass wool / 25 mm / 16 kg/m ³
Thermal Conductivity	k = 0.037 W/mK	k = 0.037 W/mK
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

France	M1	M0 + M1
Europe		EN ISO 1716 (inner duct) gross calorific value test report

CERTIFICATE

Russia	GOST-R	GOST-R
--------	--------	--------

Available on request

- Customized lengths
- Private label
- White polyester insulation
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- PE jacket

Insulation Options Available





TYPES:

ISOAFS-ALU.70 RECTANGULAR
(M1, difficult to ignite)

ISOAFS-ALU.F RECTANGULAR
(M0+M1, limited combustibility + difficult to ignite)

NO-CONDENSATION

ISOAFS-ALU RECTANGULAR

- ISOAFS-ALU RECTANGULAR thermally insulated aluminium rectangular flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- They provide maximum cross sectional area at the minimum installation space.
- Airtight ISOAFS-ALU RECTANGULAR flexible air ducts are produced from multi-layer aluminium and polyester, strengthened with high tension hard steel spring wire, surrounded with glass wool insulation and an aluminium vapour barrier.
- ISOAFS-ALU RECTANGULAR has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of ISOAFS-ALU RECTANGULAR has been tested and certified by various international bodies.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED BODY

- Difficult to ignite (ISOAFS-ALU.70 RECTANGULAR)
- Limited combustibility + difficult to ignite (ISOAFS-ALU.F RECTANGULAR)
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Quick and easy installation
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Flame Spread index = 0) (Smoke Developed index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

ALUMINIUM LAMINATED JACKET

- Difficult to ignite (Certified)
- High resistance to wear and tear
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective

TECHNICAL PROPERTIES

TYPE	ISOAFS-ALU.70 RECTANGULAR	ISOAFS-ALU.F RECTANGULAR
Fire Resistance	Difficult to ignite	Limited combustibility + Difficult to ignite
Inner Duct Construction	3 ply aluminium + 2 ply polyester	3 ply aluminium + 1 ply polyester
Jacket Construction	1 ply aluminium + 2 ply polyester	1 ply aluminium + 2 ply polyester
Nominal Thickness (Inner Duct / Jacket)	70 micron / 45 micron	74 micron / 45 micron
Cross Sectional Area Range (According to inner duct)	0.006 m ² – 0.38 m ²	0.006 m ² – 0.38 m ²
Temperature Range	-30 °C / +150 °C	-30 °C / + 250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Insulation / Thickness / Density	Glass wool / 25 mm / 16 kg/m ³	Glass wool / 25 mm / 16 kg/m ³
Thermal Conductivity	k = 0.037 W/mK	k = 0.037 W/mK
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box
CERTIFICATE		
Russia	GOST-R	GOST-R

Available on request

- Customized lengths
- Private label
- White polyester insulation
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- PE jacket

Insulation Options Available



ALTERNATIVE CONSTRUCTIONS

PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
ISOAFS-ALU.70-R6 RECTANGULAR ISOAFS-ALU.F-R6 RECTANGULAR	R 6.0 glass wool insulation
ISOAFS-ALU.70-R8 RECTANGULAR ISOAFS-ALU.F-R8 RECTANGULAR	R 8.0 glass wool insulation
ISOAFS-ALU.70-D24 RECTANGULAR ISOAFS-ALU.F-D24 RECTANGULAR	24 kg/m ³ glass wool insulation
ISOAFS-ALU.70-PE RECTANGULAR	1 ply PE jacket, in grey color
ISOAFS-ALU.70-W RECTANGULAR ISOAFS-ALU.F-W RECTANGULAR	White polyester insulation 25 mm in thickness 14 kg/m ³ in density



TYPES:

SONOAFS-ALU.70
(M1, difficult to ignite)

SONOAFS-ALU.F
(M0+M1, limited combustibility
+ difficult to ignite)

NO-CONDENSATION

SONOAFS-ALU

- SONOAFS-ALU thermally and acoustically insulated aluminium flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- Airtight SONOAFS-ALU is produced from multi-layer aluminium and polyester (perforated), strengthened with high tension hard steel spring wire, surrounded with glass wool insulation and an aluminium vapour barrier.
- SONOAFS-ALU has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of SONOAFS-ALU has been tested and certified by various international bodies.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED BODY

- Difficult to ignite (SONOAFS-ALU.70)
- Limited combustibility + difficult to ignite (SONOAFS-ALU.F)
- High resistance to UV rays
- 98 % reflective
- Impermeable to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Flame Spread index = 0) (Smoke Developed index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

ALUMINIUM LAMINATED JACKET

- Difficult to ignite (Certified)
- High resistance to wear and tear
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	SONOAFS-ALU.70	SONOAFS-ALU.F
Fire Resistance	Difficult to ignite	Limited combustibility + Difficult to ignite
Inner Duct Construction	3 ply aluminium + 2 ply polyester (Perforated)	3 ply aluminium + 1 ply polyester (Perforated)
Jacket Construction	1 ply aluminium + 2 ply polyester	1 ply aluminium + 2 ply polyester
Nominal Thickness (Inner Duct / Jacket)	70 micron / 45 micron	74 micron / 45 micron
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 82 mm – Ø 800 mm
Temperature Range	-30 °C / +150 °C	-30 °C / + 250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Insulation / Thickness / Density	Glass wool / 25 mm / 16 kg/m³	Glass wool / 25 mm / 16 kg/m³
Thermal Conductivity	k = 0.037 W/mK	k = 0.037 W/mK
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

France	M1	M0 + M1
Italy	CSI Class 1	
Europe		EN ISO 1716 (inner duct) gross calorific value test report

CERTIFICATE

Russia	GOST-R	GOST-R
--------	--------	--------

Available on request

- Customized lengths
- Private label
- White polyester insulation
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- PE jacket
- Polyester/PE barrier between the duct and the glass wool

Insulation Options Available



PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
SONOAFS-ALU.70-R6 SONOAFS-ALU.F-R6	R 6.0 glass wool insulation
SONOAFS-ALU.70-R8 SONOAFS-ALU.F-R8	R 8.0 glass wool insulation
SONOAFS-ALU.70-D24 SONOAFS-ALU.F-D24	24 kg/m³ glass wool insulation
SONOAFS-ALU.70-PE	1 ply PE jacket, in grey color
SONOAFS-ALU.70-W SONOAFS-ALU.F-W	White polyester insulation 25 mm in thickness 10 kg/m³ in density
SONOAFS-ALU.70 RECTANGULAR SONOAFS-ALU.F RECTANGULAR	rectangular in shape
SONOAFS-ALU.70B SONOAFS-ALU.FB	Polyester/PE barrier between duct and insulation (Prevents the entrance of fibers of insulation into flexible air duct)
SONOAFS-ALU.70B-R8 SONOAFS-ALU.FB-R8	R 8.0 glass wool insulation Polyester/PE barrier between duct and insulation

- Insertion Loss (page 162)
- Transmission Loss (page 170)

THERMALLY & ACOUSTICALLY INSULATED NEGATIVE PRESSURE COMPETENT ALUMINIUM FLEXIBLE AIR DUCTS



TYPES:

SONOAFS-ALU.70 FORTE
(M1, difficult to ignite)

SONOAFS-ALU.F FORTE
(M0+M1, limited combustibility
+ difficult to ignite)

NO-CONDENSATION

SONOAFS-ALU FORTE

- SONOAFS-ALU FORTE thermally and acoustically insulated aluminium negative pressure competent flexible air ducts are specifically produced for medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- Airtight SONOAFS-ALU FORTE is produced from multi-layer aluminium (perforated), strengthened with polyester and high tension hard steel spring wire, surrounded with glass wool insulation and an aluminium vapour barrier.
- SONOAFS-ALU FORTE has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of SONOAFS-ALU FORTE has been tested and certified by various international bodies.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED BODY

- Difficult to ignite (SONOAFS-ALU.70 FORTE)
- Limited combustibility + difficult to ignite (SONOAFS-ALU.F FORTE)
- High resistance to UV rays
- 98 % reflective
- Impermeable to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723
(Flame Spread index = 0)
(Smoke Developed index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

ALUMINIUM LAMINATED JACKET

- Difficult to ignite (Certified)
- High resistance to wear and tear
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	SONOAFS-ALU.70 FORTE	SONOAFS-ALU.F FORTE
Fire Resistance	Difficult to ignite	Limited combustibility + Difficult to ignite
Inner Duct Construction	3 ply aluminium + 2 ply polyester (Perforated)	3 ply aluminium + 1 ply polyester (Perforated)
Jacket Construction	1 ply aluminium + 2 ply polyester	1 ply aluminium + 2 ply polyester
Nominal Thickness (Inner Duct / Jacket)	70 micron / 45 micron	74 micron / 45 micron
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 82 mm – Ø 800 mm
Wire Pitch	18 mm (Ø ≥ 102 mm)	18 mm (Ø ≥ 102 mm)
Temperature Range	-30 °C / +150 °C	-30 °C / + 250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Insulation / Thickness / Density	Glass wool / 25 mm / 16 kg/m ³	Glass wool / 25 mm / 16 kg/m ³
Thermal Conductivity	k = 0.037 W/mK	k = 0.037 W/mK
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box
CERTIFICATE		
Russia	 GOST-R	GOST-R
France		MO+M1

Available on request

- Customized lengths
- Private label
- White polyester insulation
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- PE jacket
- Polyester/PE barrier between the duct and the glass wool

PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
SONOAFS-ALU.FB FORTE	Polyester/PE barrier between duct and insulation (Prevents the entrance of fibers of insulation into flexible air duct)



TYPE:
**SONOAFS-ALU.F PLUS
(M0+M0)**

NO-CONDENSATION

SONOAFS-ALU PLUS

- SONOAFS-ALU.F PLUS thermally and acoustically insulated aluminium flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- Airtight SONOAFS-ALU.F PLUS is produced from multi-layer aluminium and polyester (perforated), strengthened with high tension hard steel spring wire, surrounded with glass wool insulation and an aluminium vapour barrier.
- SONOAFS-ALU.F PLUS has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of SONOAFS-ALU.F PLUS has been tested and certified by various international bodies.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED BODY

- Limited combustibility
- High resistance to UV rays
- 98 % reflective
- Impermeable to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1
- UL 723
(Flame Spread index = 0)
(Smoke Developed index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

ALUMINIUM LAMINATED JACKET

- Limited combustibility
- High resistance to wear and tear
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	SONOAFS-ALU.F PLUS
Fire Resistance	Limited combustibility
Inner Duct Construction	3 ply aluminium + 1 ply polyester (Perforated)
Jacket Construction	3 ply aluminium + 1 ply polyester
Nominal Thickness (Inner Duct / Jacket)	74 micron / 74 micron
Available Diameters	Ø 82 mm – Ø 800 mm
Temperature Range	-30 °C / +250 °C
Air Velocity	30 m/s (max)
Operating Pressure	3000 Pa (max)
Insulation / Thickness / Density	Glass wool / 25 mm / 16 kg/m ³
Thermal Conductivity	k = 0.037 W/mK
Standard Length	5 m
Packing	Single cardboard box

FIRE CERTIFICATE

France	M0 + M0
--------	---------

Available on request

- Customized lengths
- Private label

Insulation Options Available





TYPES:
SONOAFS-NW
(M1, Difficult to ignite)
SONOAFS-NW.PE
(M1, Difficult to ignite)

NO-CONDENSATION

SONOAFS-NW

- SONOAFS-NW thermally and acoustically insulated flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- SONOAFS-NW has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of SONOAFS-NW has been tested and certified by various international bodies.

PROPERTIES & ADVANTAGES

NONWOVEN CONSTRUCTION

- Difficult to ignite
- High resistance to UV rays
- Dampens mechanical vibration
- Excellent sound attenuation
- Fibre-migration proof
- Resistant to chemicals
- Suitable for IT Centers, computer rooms, hospitals & schools

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723
(Flame Spread index = 0)
(Smoke Developed index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

PE OUTER JACKET

- High vibration resistance
- High resistance to wear and tear
- Impermeable to UV rays
- Resistant to chemicals
- Easy care

TECHNICAL PROPERTIES

TYPE	SONOAFS-NW	SONOAFS-NW.PE
Fire Resistance	Difficult to ignite	Difficult to ignite
Inner Duct Construction	Nonwoven Fabric	Nonwoven Fabric
Jacket Construction	1 ply aluminium + 2 ply polyester	1 ply PE
Nominal Thickness (Inner Duct / Jacket)	600 micron / 45 micron	600 micron / 100 micron
Available Diameters	Ø 82 mm – Ø 406 mm	Ø 82 mm – Ø 406 mm
Temperature Range	-20 °C / + 90 °C	-20 °C / + 90 °C
Air Velocity	20 m/s (max)	20 m/s (max)
Operating Pressure	1500 Pa (max)	1500 Pa (max)
Insulation / Thickness / Density	Glass wool / 25 mm / 16 kg/m³	Glass wool / 25 mm / 16 kg/m³
Thermal Conductivity	k = 0.037 W/mK	k = 0.037 W/mK
Standard Length	6 m	6 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

France	M1	M1
--------	----	----

Available on request

- Customized lengths
- Private label
- Black & white polyester colors
- Black PE color
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- White polyester insulation

Insulation Options Available





TYPES:

COMBIAFS

COMBIAFS.S

ACOUSTIC COMBIAFS
(perforated inner surface)

NO-CONDENSATION

COMBIAFS

- COMBIAFS is produced from multi-layer aluminium & polyester strengthened with high tension steel spring wire, covered with a PVC layer. COMBIAFS is recommended for discharging welding fumes (where high mechanical resistance is required), low and medium pressure heating, cooling and air conditioning systems.
- COMBIAFS is more effective against condensation than a standard non-insulated aluminium flexible air duct. To maintain indoor air quality at a certain level, preventing condensation is important. Accumulation of water on the duct surface arising from condensation leads to problems such as mold growth and corrosion, which would cause serious health problems and deformation of building materials and components.
- In order to prevent condensation the surface temperature of the duct shall be kept higher than the dew point of the air surrounding it. A PVC layer on the outer surface of COMBIAFS acts as an insulation which makes the duct more impermeable to water and keeps surface temperature higher.
- Punctures and tears could also lead to condensation and air leaks. Prevention from such deformations is achieved by adding a PVC layer which maintains more mechanical resistance than aluminum flexible air duct.
- COMBIAFS is elastic and flexible. It can be easily fitted to circular, oval, or rectangular connectors.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED INNER FLEXIBLE DUCT

- Impermeable to UV rays
- High resistance to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

PVC SLEEVE

- High resistance to wear and tear
- High mechanical resistance
- High resistance to UV rays
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	COMBIAFS	COMBIAFS.S	ACOUSTIC COMBIAFS
Construction	3 ply aluminium 2 ply polyester 1 ply PVC	1 ply aluminium 1 ply polyester 1 ply PVC	3 ply aluminium (perforated) 2 ply polyester (perforated) 1 ply PVC
Nominal Thickness	150 micron	100 micron	150 micron
PVC Color	Black	Black	Black
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 52 mm – Ø 800 mm	Ø 52 mm – Ø 800 mm
Temperature Range	-30 °C / +150 °C	-30 °C / +150 °C	-30 °C / +150 °C
Air Velocity	30 m/s (max)	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)	3000 Pa (max)
Standard Length	10 m	10 m	10 m
Packing	Single cardboard box	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

Italy Class 1

United Kingdom
(BS 476 Part 6&7) Class 0

CERTIFICATE

Russia GOST-R

GOST-R

Available on request

- Customized lengths
- Private label
- Net packing
- Plastic bag packing
- Bulk packing
- Grey PVC color
- White PVC color

ALTERNATIVE CONSTRUCTIONS

PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
COMBIAFS GREY ACOUSTIC COMBIAFS GREY	Grey PVC color
COMBIAFS WHITE ACOUSTIC COMBIAFS WHITE	White PVC color

ALUMINIUM & PVC COMBINED NEGATIVE PRESSURE COMPETENT FLEXIBLE AIR DUCTS



NO-CONDENSATION

COMBIAFS FORTE

- COMBIAFS HEAVY is produced from multi-layer aluminium & polyester strengthened with high tension steel spring wire, covered with a PVC layer. High pressure competent COMBIAFS HEAVY is recommended for discharging welding fumes (where high mechanical resistance is required), low and medium pressure heating, cooling and air conditioning systems.
- COMBIAFS-HEAVY is more effective against condensation than a standard non-insulated aluminium flexible air duct. To maintain indoor air quality at a certain level, preventing condensation is important. Accumulation of water on the duct surface arising from condensation leads to problems such as mold growth and corrosion, which would cause serious health problems and deformation of building materials and components.
- In order to prevent condensation the surface temperature of the duct shall be kept higher than the dew point of the air surrounding it. A PVC layer on the outer surface of COMBIAFS HEAVY acts as an insulation which makes the duct more impermeable to water and keeps surface temperature higher.
- Punctures and tears could also lead to condensation and air leaks. Prevention from such deformations is achieved by adding a PVC layer which maintains more mechanical resistance than aluminum flexible air duct.
- COMBIAFS HEAVY is elastic and flexible. It can be easily fitted to circular, oval, or rectangular connectors.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED INNER FLEXIBLE DUCT

- Impermeable to UV rays
- High resistance to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

PVC SLEEVE

- High resistance to wear and tear
- High mechanical resistance
- High resistance to UV rays
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	COMBIAFS FORTE	COMBIAFS - HEAVY
Construction	3 ply aluminium 2 ply polyester 1 ply PVC	3 ply aluminium 2 ply polyester 1 ply PVC
Nominal Thickness	150 micron	150 micron
PVC Color	Black	Black
Available Diameters	Ø 82 mm – Ø 800 mm	Ø 82 mm – Ø 800 mm
Wire Pitch	18 mm (Ø ≥102 mm)	18 mm (Ø ≥102 mm) strong design thicker wire
Temperature Range	-30 °C / +150 °C	-30 °C / +150 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	30 m/s (max)
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box
CERTIFICATE		
Russia	GOST-R	GOST-R

Available on request

- Customized lengths
- Private label
- Net packing
- Plastic bag packing
- Bulk packing
- Grey PVC color
- White PVC color

ALTERNATIVE CONSTRUCTIONS

PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
COMBIAFS GREY HEAVY	Grey PVC color
COMBIAFS WHITE HEAVY	White PVC color

NO-CONDENSATION



COMBIAFS RECTANGULAR

- COMBIAFS RECTANGULAR is produced from multi-layer aluminium & polyester strengthened with high tension steel spring wire, covered with a PVC layer. COMBIAFS RECTANGULAR is recommended for discharging welding fumes (where high mechanical resistance is required), low and medium pressure heating, cooling and air conditioning systems.
- COMBIAFS RECTANGULAR is more effective against condensation than a standard non-insulated aluminium flexible air duct. To maintain indoor air quality at a certain level, preventing condensation is important. Accumulation of water on the duct surface arising from condensation leads to problems such as mold growth and corrosion, which would cause serious health problems and deformation of building materials and components.
- In order to prevent condensation the surface temperature of the duct shall be kept higher than the dew point of the air surrounding it. A PVC layer on the outer surface of COMBIAFS RECTANGULAR acts as an insulation which makes the duct more impermeable to water and keeps surface temperature higher.
- Punctures and tears could also lead to condensation and air leaks. Prevention from such deformations is achieved by adding a PVC layer which maintains more mechanical resistance than aluminum flexible air duct.
- COMBIAFS RECTANGULAR is elastic and flexible. It can be easily fitted to circular, oval, or rectangular connectors.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED INNER FLEXIBLE DUCT

- Impermeable to UV rays
- High resistance to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

PVC SLEEVE

- High resistance to wear and tear
- High mechanical resistance
- High resistance to UV rays
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	COMBIAFS RECTANGULAR
Construction	3 ply aluminium 2 ply polyester 1 ply PVC
Nominal Thickness	150 micron
PVC Color	Black
Cross Sectional Area Range	0.006 m ² – 0.38 m ²
Temperature Range	-30 °C / +150 °C
Air Velocity	30 m/s (max)
Operating Pressure	3000 Pa (max)
Standard Length	6 m
Packing	Single cardboard box
CERTIFICATE	
Russia	 GOST-R

Available on request

- Customized lengths
- Private label
- Net packing
- Plastic bag packing
- Bulk packing
- Grey PVC color
- White PVC color

ALTERNATIVE CONSTRUCTIONS

PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
COMBIAFS RECTANGULAR GREY	Grey PVC color
COMBIAFS RECTANGULAR WHITE	White PVC color



NO-CONDENSATION

ISOAFS-COMBI

- ISOAFS-COMBI thermally insulated aluminium & PVC combined flexible air ducts are specifically produced for discharging welding fumes and where high mechanical resistance is required. ISOAFS-COMBI is also recommended for heating, cooling and air conditioning systems.
- ISOAFS-COMBI is produced from multi-layer aluminium & polyester strengthened with high tension steel spring wire, covered with a PVC jacket and surrounded with glass wool insulation and an PE vapour barrier.
- ISOAFS-COMBI is elastic and flexible. It can be easily fitted to circular, oval, or rectangular connectors.

PROPERTIES & ADVANTAGES

ALUMINIUM LAMINATED INNER FLEXIBLE DUCT

- Impermeable to UV rays
- High resistance to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

PVC JACKET

- High resistance to wear and tear
- High mechanical resistance
- High resistance to UV rays
- Resistant to chemicals

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Flame Spread index = 0) (Smoke Developed index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

PE OUTER JACKET

- High vibration resistance
- High resistance to wear and tear
- Impermeable to UV rays
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	ISOAFS-COMBI
Inner Duct Construction	3 ply aluminium / 2 ply polyester / 1 ply PVC
Jacket Construction	1 ply PE
Nominal Thickness (Inner Duct / Jacket)	150 micron / 100 micron
Color (PVC / PE)	Black
Available Diameters	Ø 52 mm – Ø 800 mm
Temperature Range	-30 °C / +150 °C
Air Velocity	30 m/s (max)
Operating Pressure	3000 Pa (max)
Insulation / Thickness / Density	Glass wool 25 mm / 16 kg/m³
Standard Length	10 m
Packing	Single cardboard box
FIRE CERTIFICATE	
Italy	CSI Class 1
CERTIFICATE	
Russia	GOST-R

Available on request

- Customized lengths
- Private label
- Grey PVC color
- Grey PE color
- White polyester insulation
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- Aluminium jacket

Insulation Options Available



ALTERNATIVE CONSTRUCTIONS

PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
ISOAFS-COMBI-ALU	Aluminium jacket
ISOAFS-COMBI RECTANGULAR	Rectangular in shape
ISOAFS-COMBI-ALU RECTANGULAR	Aluminium jacket rectangular in shape
ISOAFS-COMBI-W	White polyester insulation 25 mm in thickness 10 kg/m³ in density
ISOAFS-COMBI-R8	R8.0 glass wool insulation



TYPES:
VINYLAFS WHITE
VINYLAFS BLACK
VINYLAFS GREY

VINYLAFS

- VINYLAFS non-insulated PVC flexible air ducts are specifically produced for heating, cooling, ventilation, air conditioning systems under low and medium pressure.
- VINYLAFS has high resilience and can be used under excessive vibration and/or perpetual motion systems.
- It is produced from PVC strips with high tension steel spring wire.
- VINYLAFS is airtight and fire retardant.
- Oval, circular, and rectangular connectors are easy to install.

PROPERTIES & ADVANTAGES

PVC CONSTRUCTION

- High vibration resistance
- Impermeable to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

TECHNICAL PROPERTIES

TYPE	VINYLAFS WHITE	VINYLAFS BLACK	VINYLAFS GREY
Inner Duct Construction	1 ply PVC	1 ply PVC	1 ply PVC
Nominal Thickness	60 micron	60 micron	60 micron
PVC Color	White	Black	Grey
Available Diameters	Ø 82 mm – Ø 254 mm	Ø 82 mm – Ø 254 mm	Ø 82 mm – Ø 254 mm
Temperature Range	-20 °C / +70 °C	-20 °C / +70 °C	-20 °C / +70 °C
Air Velocity	20 m/s (max)	20 m/s (max)	20 m/s (max)
Operating Pressure	1500 Pa (max)	1500 Pa (max)	1500 Pa (max)
Standard Length	6 m	6 m	6 m
Packing	Single cardboard box	Single cardboard box	Single cardboard box

Available on request

- Customized lengths
- Private label
- Net packing
- Plastic bag packing
- Bulk packing
- Shrink Packing



NON-INSULATED REINFORCED PVC FLEXIBLE AIR DUCTS



TYPES:
PVCAFS
PVCAFS.F

PVCAFS

- PVCAFS non-insulated reinforced PVC flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, air conditioning, exhaust and dust extraction systems.
- PVCAFS is highly resilient and can be used in applications with excessive vibration and/or perpetual motion systems.
- PVCAFS is produced from PVC coated polyester fabric and reinforced with high tension steel spring wire.
- PVCAFS flexible air ducts are airtight.
- PVCAFS is highly elastic and flexible. It can be easily fitted to circular, oval or rectangular connectors.

PROPERTIES & ADVANTAGES

REINFORCED PVC CONSTRUCTION

- High vibration resistance
- Suitable for dust/particle transport
- Impermeable to UV rays
- Resistant to chemicals

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs
- Smooth inner surface
- Minimum pressure loss

TECHNICAL PROPERTIES

TYPE	PVCAFS	PVCAFS.F
Base Fabric	Polyester	Fibre Gloss
Coating	PVC (both sides)	PVC (both sides)
Nominal Thickness	250 micron	250 micron
PVC Color	Grey	Grey
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 82 mm – Ø 356 mm
Temperature Range	-30 °C / +80 °C	-30 °C / +100 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Standard Length	6 m / 10 m	6 m
Packing	Single cardboard box	Single cardboard box
CERTIFICATE		
Russia	PC GOST-R	
France		M1

Available on request

- Customized lengths
- Private label
- Bulk packing



PVCAFS.M1

- PVCAFS.M1 non-insulated reinforced PVC flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, air conditioning, exhaust and dust extraction systems.
- PVCAFS.M1 is highly resilient and can be used in applications with excessive vibration and/or perpetual motion systems.
- PVCAFS.M1 is produced from PVC coated polyester mesh and reinforced with high tension steel spring wire.
- PVCAFS.M1 flexible air ducts are airtight.
- PVCAFS.M1 is highly elastic and flexible. It can be easily fitted to circular, oval or rectangular connectors.

PROPERTIES & ADVANTAGES

REINFORCED PVC CONSTRUCTION

- Fire retardant
- High vibration resistance
- Suitable for dust/particle transport
- Impermeable to UV rays
- Resistant to chemicals

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs
- Smooth inner surface
- Minimum pressure loss

TECHNICAL PROPERTIES

TYPE	PVCAFS.M1	PVCAFS.M
Fire Resistance	Fire retardant	Fire retardant
Base Fabric	Polyester	Polyester
Coating	PVC (both sides)	PVC (both sides)
Nominal Thickness	220 micron	220 micron
PVC Color	Grey	Grey
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 52 mm – Ø 800 mm
Temperature Range	-30 °C / +80 °C	-30 °C / +80 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Standard Length	6 m	6 m
Packing	Single cardboard box	Single cardboard box
FIRE CERTIFICATE		
France	M1	M2
United Kingdom (BS 476)	Part 6	

Available on request

- Customized lengths
- Private label
- Bulk packing
- Net packing

ALTERNATIVE CONSTRUCTIONS

PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
PVCAFS.M1 RECTANGULAR	Rectangular in shape
PVCAFS.M RECTANGULAR	Rectangular in shape



PVCAFS-HEAVY

- PVCAFS-HEAVY non-insulated industrial reinforced PVC flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, air conditioning, exhaust and dust extraction systems.
- PVCAFS-HEAVY is highly resilient and can be used in applications with excessive vibration and/or perpetual motion systems.
- Non-insulated industrial PVCAFS-HEAVY flexible air ducts are airtight.
- PVCAFS-HEAVY is manufactured from PVC coated polyester fabric and reinforced with high tension steel spring wire.
- PVCAFS-HEAVY is highly elastic and flexible. It can be easily fitted to circular, oval or rectangular connectors.

PROPERTIES & ADVANTAGES

REINFORCED PVC CONSTRUCTION

- High vibration resistance
- Suitable for dust/particle transport
- Impermeable to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

TECHNICAL PROPERTIES

TYPE	PVCAFS-HEAVY
Base Fabric	Polyester
Coating	PVC (both sides)
Nominal Thickness	250 micron
PVC Color	Grey
Available Diameters	Ø 52 mm – Ø 800 mm
Wire Pitch	20 mm (Ø ≥102 mm)
Temperature Range	-30 °C / +80 °C
Air Velocity	30 m/s (max)
Operating Pressure	3000 Pa (max)
Standard Length	6 m
Packing	Single cardboard box

Available on request

- Customized lengths
- Private label
- Plastic bag packing
- Bulk packing

ALTERNATIVE CONSTRUCTIONS

Product Name	Difference from the standard type
PVCAFS HEAVY RECTANGULAR	rectangular in shape





NO-CONDENSATION

ISOAFS-VINYL

- ISOAFS-VINYL thermally insulated PVC flexible air ducts are specifically produced for heating, cooling, ventilation, air conditioning and exhaust systems under low and medium pressure.
- ISOAFS-VINYL has high resilience and can be used under excessive vibration and/or perpetual motion systems.
- Airtight ISOAFS-VINYL is strengthened with high tension steel spring wire, surrounded with thick glass wool insulation and a PE vapour barrier.
- ISOAFS-VINYL is elastic and flexible. It can be easily fitted to circular, oval or rectangular connectors.

PROPERTIES & ADVANTAGES

PVC CONSTRUCTION

- High vibration resistance
- Impermeable to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Smoke developed index = 0) (Flame spread index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

PE OUTER JACKET

- High vibration resistance
- High resistance to wear and tear
- Impermeable to UV rays
- Resistant to chemicals
- Easy care

TECHNICAL PROPERTIES

TYPE	ISOAFS-VINYL
Inner Duct Construction	1 ply PVC
Jacket Construction	1 ply PE
Nominal Thickness (Inner Duct / Jacket)	60 micron / 50 micron
PVC Color	Grey
PE Color	Grey
Available Diameters	Ø 82 mm – Ø 254 mm
Temperature Range	-20 °C / +70 °C
Air Velocity	20 m/s (max)
Operating Pressure	1500 Pa (max)
Insulation	Glass wool
Insulation Thickness	25 mm
Insulation Density	16 kg/m ³
Standard Length	6 m
Packing	Single cardboard box

Available on request

Insulation Options Available

- Customized lengths
- Private label
- Black & White PVC colors
- Black PE color
- White polyester insulation
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- Net Packing





TYPES:

ISOAFS-PVC
(polyester base fabric)

ISOAFS-PVC.M1
(polyester base fabric)

NO-CONDENSATION

ISOAFS-PVC REINFORCED

- ISOAFS-PVC thermally insulated reinforced PVC flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, air conditioning, exhaust and dust extraction systems.
- ISOAFS-PVC is highly resilient and can be used in applications with excessive vibration and/or perpetual motion systems.
- Airtight ISOAFS-PVC is extremely durable, strengthened with high tension steel spring wire, surrounded with thick glass wool insulation and a PE vapour barrier.
- ISOAFS-PVC is elastic and flexible. It can be easily fitted to circular, oval or rectangular connectors.

PROPERTIES & ADVANTAGES

REINFORCED PVC CONSTRUCTION

- High vibration resistance
- Impermeable to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723
(Smoke developed index = 0)
(Flame spread index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

PE OUTER JACKET

- High vibration resistance
- High resistance to wear and tear
- Impermeable to UV rays
- Resistant to chemicals
- Easy care

TECHNICAL PROPERTIES

TYPE	ISOAFS-PVC	ISOAFS-PVC.M1
Inner Duct – Base Fabric	Polyester	Polyester
Inner Duct – Coating	PVC (both sides)	PVC (both sides)
Jacket Construction	1 ply PE	1 ply PE
Nominal Thickness (Inner Duct / Jacket)	250 micron / 100 micron	220 micron / 100 micron
PVC Color	Grey	Grey
PE Color	Grey	Grey
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 52 mm – Ø 800 mm
Temperature Range	-30 °C / +80 °C	-30 °C / +80 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Insulation	Glass wool	Glass wool / White polyester
Insulation Thickness	25 mm	25 mm
Insulation Density	16 kg/m ³	16 kg/m ³
Standard Length	6 m	6 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

Italy

Class 1

Available on request

- Customized lengths
- Private label
- Black PE color
- White polyester insulation
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation

Insulation Options Available



ALTERNATIVE CONSTRUCTIONS

PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
ISOAFS-PVC BLACK ISOAFS-PVC.F BLACK	1 ply PE jacket, in black color
ISOAFS-PVC-ALU ISOAFS-PVC.F-ALU	Aluminium jacket
ISOAFS-PVC RECTANGULAR	Rectangular in shape
ISOAFS-PVC-W ISOAFS-PVC.F-W	White polyester insulation 25 mm in thickness 10 kg/m ³ in density



PEAFS

- PEAFS non-insulated PE(Polyethylene) flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, air conditioning, exhaust and dust extraction systems.
- PEAFS is highly resilient and can be used in applications with excessive vibration and/or perpetual motion systems.
- PE flexible air ducts are airtight.
- PEAFS is manufactured from hardwearing PE strip reinforced with high tension steel spring wire.
- PEAFS is highly elastic and flexible. It can be easily fitted to circular, oval or rectangular connectors.

PROPERTIES & ADVANTAGES

PE CONSTRUCTION

- High vibration resistance
- Suitable for dust/particle transport
- Impermeable to UV rays
- Resistant to chemicals

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs
- Smooth inner surface

TECHNICAL PROPERTIES

TYPE	PEAFS
Construction	1 ply PE
Nominal Thickness	100 micron
PE Color	Black
Available Diameters	Ø 52 mm - Ø 800 mm
Temperature Range	-30 °C / +70 °C
Air Velocity	20 m/s (max)
Operating Pressure	2000 Pa (max)
Standard Length	10 m
Packing	Single cardboard box
FIRE CERTIFICATE	
Italy	CSI Class 1

Available on request

- Customized lengths
- Private label
- Plastic bag packing
- Bulk packing
- Net packing

ALTERNATIVE CONSTRUCTIONS

PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
PEAFS RECTANGULAR	Rectangular in shape

THERMALLY INSULATED PE FLEXIBLE AIR DUCTS



TYPES:

ISOAFS-PE
(Glass wool insulation)

ISOAFS-PE-W
(White polyester fiber insulation)

NO-CONDENSATION

ISOAFS-PE

- ISOAFS-PE thermally insulated PE(Polyethylene) flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- ISOAFS-PE is highly resilient and can be used in applications with excessive vibration and/or perpetual motion systems.
- Airtight ISOAFS-PE is extremely durable, strengthened with high tension steel spring wire, surrounded with thick glass wool or white polyester fiber insulation and a PE vapour barrier.
- ISOAFS-PE is elastic and flexible. It can be easily fitted to circular, oval or rectangular connectors.

PROPERTIES & ADVANTAGES

PE CONSTRUCTION

- High vibration resistance
- Suitable for dust/particle transport
- Impermeable to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723
(Smoke developed index = 0)
(Flame spread index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- Non-condensing property

PE OUTER JACKET

- High vibration resistance
- High resistance to wear and tear
- Impermeable to UV rays
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	ISOAFS-PE	ISOAFS-PE-W
Inner Duct Construction	1 ply PE	1 ply PE
Jacket Construction	1 ply PE	1 ply PE
Nominal Thickness (Inner Duct / Jacket)	100 micron / 100 micron	100 micron / 100 micron
PE Color	Black	Black
Available Diameters	Ø 82 mm – Ø 800 mm	Ø 82 mm – Ø 800 mm
Temperature Range	-30 °C / +70 °C	-30 °C / +70 °C
Air Velocity	20 m/s (max)	20 m/s (max)
Operating Pressure	2000 Pa (max)	2000 Pa (max)
Insulation	Glass wool	White polyester
Insulation Thickness	25 mm	25 mm
Insulation Density	16 kg/m ³	250 g/m ²
Standard Length	10 m	10 m
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

Italy	CSI	Class 1	Class 1
-------	-----	---------	---------

Available on request

- Customized lengths
- Private label
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation

Insulation Options Available



ALTERNATIVE CONSTRUCTIONS

PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
ISOAFS-PE RECTANGULAR ISOAFS-PE-W RECTANGULAR	Rectangular in shape



POLYAFS

- POLYAFS non-insulated polyester flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation and air conditioning systems.
- Airtight POLYAFS is produced from multi layer polyester, strengthened with high tension hard steel spring wire.
- POLYAFS is highly elastic and flexible. It can be easily fitted to circular or oval connectors.

PROPERTIES & ADVANTAGES

POLYESTER LAMINATED BODY

- High resistance to UV rays
- Resistant to chemicals
- Maintenance free

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

TECHNICAL PROPERTIES

TYPE	POLYAFS
Construction	2 ply polyester
Nominal Thickness	30 micron
Available Diameters	Ø 82 mm – Ø 800 mm
Temperature Range	-30 °C / +120 °C
Air Velocity	30 m/s (max)
Operating Pressure	3000 Pa (max)
Standard Length	7.6 m
Packing	Single cardboard box
CERTIFICATE	
Russia	PC GOST-R

Available on request

- Customized lengths
- Private label
- Metallized polyester

ALTERNATIVE CONSTRUCTIONS

Product Name	Difference from the standard type
POLYAFS.M	Metallized polyester



NO-CONDENSATION

ISOAFS-POLY

- ISOAFS-POLY thermally insulated polyester flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- Airtight ISOAFS-POLY is produced from multi-layer polyester, strengthened with high tension steel spring wire, surrounded with glass wool insulation and reinforced metallized polyester vapour barrier.
- ISOAFS-POLY is highly elastic and flexible. It can be easily fitted to circular or oval connectors.

PROPERTIES & ADVANTAGES

POLYESTER LAMINATED BODY

- High resistance to UV rays
- Resistant to chemicals
- Maintenance free

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Smoke developed index = 0) (Flame spread index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

REINFORCED METALLIZED POLYESTER LAMINATED JACKET

- High resistance to wear and tear
- Impermeable to UV rays
- High resistance to UV rays
- Reflection property
- Resistant to chemicals
- Easy care

TECHNICAL PROPERTIES

TYPE	ISOAFS-POLY
Inner Duct Construction	2 ply polyester
Nominal Thickness of Inner Duct	30 micron
Jacket Construction	2 ply Metallized polyester (reinforced by polyester fiber)
Nominal Thickness of Jacket	30 micron
Available Diameters	Ø 82 mm - Ø 800 mm
Temperature Range	-30 °C / +120 °C
Air Velocity	30 m/s (max)
Operating Pressure	3000 Pa (max)
Insulation	Glass wool
Insulation Thickness	25 mm
Insulation Density	16 kg/m³
Standard Length	7.6 m
Packing	Single cardboard box
CERTIFICATE	
Russia	PC GOST-R

Available on request

- Customized lengths
- Private label
- White polyester insulation
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- PE jacket

Insulation Options Available



ALTERNATIVE CONSTRUCTIONS

PRODUCT NAME	DIFFERENCE FROM THE STANDARD TYPE
ISOAFS-POLY.M	Metallized polyester inner core
ISOAFS-POLY-R6	R 6.0 glass wool insulation
ISOAFS-POLY-R8	R 8.0 glass wool insulation
ISOAFS-POLY-W	White polyester insulation 25 mm in thickness 10 kg/m³ in density
ISOAFS-POLY-D24	24 kg/m³ glass wool insulation
ISOAFS-POLY.45	Nominal thickness of inner duct: 45 micron

THERMALLY INSULATED UL 181 CLASS 1 CERTIFIED POLYESTER FLEXIBLE AIR DUCTS



NO-CONDENSATION

ISOAFS-POLY.181

- ISOAFS-POLY.181 thermally insulated polyester flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- Airtight ISOAFS-POLY.181 is produced from multi-layer polyester, strengthened with high tension steel spring wire, surrounded with glass wool insulation and aluminium vapour barrier.
- ISOAFS-POLY.181 is highly elastic and flexible. It can be easily fitted to circular or oval connectors.

PROPERTIES & ADVANTAGES

POLYESTER LAMINATED INNER DUCT

- High resistance to UV rays
- Resistant to chemicals
- Maintenance free

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Smoke developed index = 0) (Flame spread index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- Non-condensing property

ALUMINIUM LAMINATED JACKET

- Difficult to ignite (Certified)
- High resistance to wear and tear
- Impermeable to UV rays
- High resistance to UV rays
- 98 % reflective
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	ISOAFS-POLY.181
Inner Duct Construction	2 ply polyester
Nominal Thickness of Inner Duct	30 micron
Jacket Construction	1 ply aluminium / 2 ply polyester
Nominal Thickness of Jacket	45 micron
Available Diameters	Ø 82 mm - Ø 800 mm
Temperature Range	-30 °C / +120 °C
Air Velocity	30 m/s (max)
Operating Pressure	3000 Pa (max)
Insulation	Glass wool
Insulation Thickness	25 mm
Insulation Density	16 kg/m ³
Standard Length	7.6 m
Packing	Single cardboard box
FIRE CERTIFICATE	
Flame Spread Index [UL 723 as per UL 181]	< 25
Smoke Developed Index [UL 723 as per UL 181]	< 50
CERTIFICATE	
Russia	GOST-R

Available on request


- Customized lengths
- Private label
- White polyester insulation

Insulation Options Available





TYPES:
SEMIAFS
SEMIAFS.C

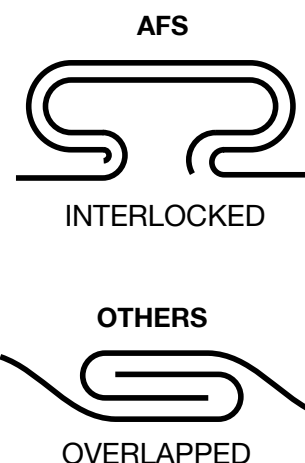

SEMIAFS

- SEMIAFS aluminium semi flexible air ducts are flexible, extendable and highly reliable for low and medium pressure air conditioning, ventilation, boiler systems and chimney liners.
- SEMIAFS is elastic, flexible and stretchable.
- Oval and circular connectors are easily installed.
- SEMIAFS is secured using an “INTERLOCK” crimp system. “INTERLOCK” crimp systems minimize separation of the duct when it is stretched or bent.

PROPERTIES & ADVANTAGES

PURE ALUMINIUM BODY

- Non-combustible
- Impermeable to UV rays
- High resistance to UV rays
- Resistant to chemicals

SEMI-FLEXIBLE & INTERLOCK CONSTRUCTION


- Easy to transport & store
- Quick and easy installation
- Inseparable
- Leak proof
- Airtight
- Energy efficient
- Low operation and maintenance cost

TECHNICAL PROPERTIES

TYPE	SEMIAFS	SEMIAFS.C
Fire Resistance	Non-combustible	Non-combustible
Construction	1 ply aluminium	1 ply aluminium
Nominal Thickness	90 micron	90 micron
Available Diameters	Ø 80 mm - Ø 800 mm	Ø 80 mm - Ø 800 mm
Temperature Range	-25 °C / +250 °C	-25 °C / +250 °C
Air Velocity	25 m/s (max)	25 m/s (max)
Operating Pressure	2000 Pa (max)	2000 Pa (max)
Standard Length	1.5 m / 3.0 m / 6.0 m	1.5 m / 3.0 m / 6.0 m
Compression Ratio	1/3	1/3
Packing	Single nylon package	Single nylon package
FIRE CERTIFICATE		
(EN 13501-1)	Class A1	Class A1
CERTIFICATE		
Russia	GOST-R	GOST-R

Available on request

- Customized lengths
- Private label
- 80 micron aluminium
- 120 micron aluminium
- Insulated type
- Bulk packing

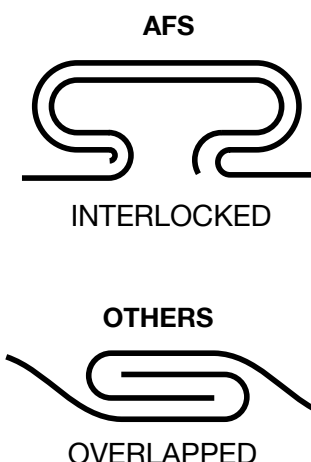

SEMI-AFS-INOX

- SEMI-AFS-INOX stainless steel semi flexible ducts are flexible and highly reliable for fume and smoke extraction. Mainly used as chimney liners for discharging high temperature gases and smoke.
- It is suitable for all kinds of fuel (natural gas, LPG, oil, wood etc.).
- Oval and circular connectors are easily installed.
- SEMI-AFS-INOX is produced from 316 L quality stainless steel strip using the “INTERLOCK” crimp system. “INTERLOCK” crimp systems minimize separation of the duct when it is stretched or bent.

PROPERTIES & ADVANTAGES

316 L QUALITY STAINLESS STEEL BODY

- Non-combustible
- Impermeable to UV rays
- High resistance to UV rays
- Resistant to chemicals

INTERLOCK CRIMP SYSTEM

- Inseparable
- Leak proof
- Airtight
- Energy efficiency

SEMI-FLEXIBLE CONSTRUCTION

- Easy to install & store
- Low installation cost

TECHNICAL PROPERTIES


TYPE	SEMI-AFS-INOX
Fire Resistance	Non-combustible
Construction	316 L Stainless Steel
Nominal Thickness	100 micron
Available Diameters	Ø 80 mm - Ø 800 mm
Temperature Range	-30 °C / +800 °C
Air Velocity	25 m/s (max)
Operating Pressure	12500 Pa (max)
Standard Length	1.0 m / 1.5 m / 2.0 m / 2.5 m / 3.0 m / 5.0 m
Compression Ratio	Cannot be compressed
Packing	Single nylon package
FIRE CERTIFICATE	
Europe (EN 13501-1)	Class A1
CERTIFICATE	
Russia	GOST-R

Available on request

- Customized lengths
- Private label
- Insulated type



NO-CONDENSATION

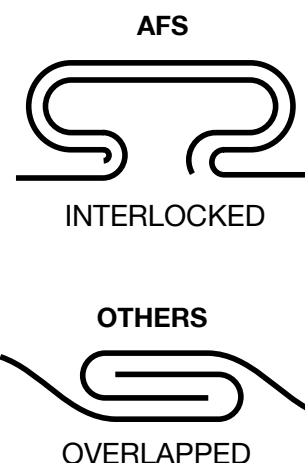

ACOUSTIC SEMIAFS

- ACOUSTIC SEMIAFS aluminium semi flexible air ducts are flexible, extendable and highly reliable for low and medium pressure air conditioning, ventilation, boiler systems and chimney liners.
- Airtight ACOUSTIC SEMIAFS is produced from perforated aluminium surrounded with glass wool insulation and an aluminium vapour barrier.
- ACOUSTIC SEMIAFS is elastic, flexible and stretchable.
- Oval and circular connectors are easily installed.
- ACOUSTIC SEMIAFS is secured using an "INTERLOCK" crimp system. "INTERLOCK" crimp systems minimize separation of the duct when it is stretched or bent.

PROPERTIES & ADVANTAGES

PURE ALUMINIUM BODY

- Non-combustible
- Impermeable to UV rays
- High resistance to UV rays
- Resistant to chemicals

SEMI-FLEXIBLE & INTERLOCK CONSTRUCTION

- Easy to transport & store
- Quick and easy installation
- Inseparable
- Leak proof
- Airtight
- Energy efficient
- Low operation and maintenance cost

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Flame Spread Index = 0) (Smoke Developed Index = 0)
- No fiber erosion
- Minimum energy loss
- Perfect insulation property
- No-condensation

TECHNICAL PROPERTIES

TYPE	ACOUSTIC SEMIAFS
Fire Resistance	Non-combustible + difficult to ignite
Inner Duct Construction	1 ply aluminium (perforated)
Jacket Construction	1 ply aluminium, 2 ply polyester
Nominal Thickness (Inner Duct / Jacket)	90 micron / 45 micron
Available Diameters	Ø 80 mm - Ø 800 mm
Temperature Range	-25 °C / +250 °C
Air Velocity	25 m/s (max)
Operating Pressure	2000 Pa (max)
Insulation	Glass wool
Insulation Thickness	25 mm
Insulation Density	16 kg/m³
Standard Length	1.0 m / 2.0 m / 3.0 m
Packing	Single cardboard box
FIRE CERTIFICATE	
Europe (EN 13501-1)	Class A1 (inner flexible air duct)
CERTIFICATE	
Russia	GOST-R

Available on request

- Customized lengths
- Private label
- 80 micron aluminium
- 120 micron aluminium
- Insulated type
- Bulk packing






TYPES:

SOUNDROPAFS

SOUNDROPAFS.P

NO-CONDENSATION

AFS



INTERLOCKED

OTHERS



OVERLAPPED

SOUNDROPAFS

- SOUNDROPAFS aluminium circular duct type silencers are flexible and highly reliable for low and medium pressure air conditioning, ventilation and boiler systems.
- Airtight SOUNDROPAFS is produced from perforated aluminium surrounded with glass wool insulation and an aluminium or a PE vapour barrier.
- Ends are fitted with ring collars to reduce installation time.
- SOUNDROPAFS is secured using an "INTERLOCK" crimp system. "INTERLOCK" crimp systems minimize separation of the duct when it is stretched or bent.

PROPERTIES & ADVANTAGES

PURE ALUMINIUM BODY

- Non-combustible
- Resistant to chemicals

SEMI-FLEXIBLE & INTERLOCK CONSTRUCTION

- Easy to transport & store
- Quick and easy installation
- Inseparable
- Leak proof
- Airtight
- Energy efficient
- Low operation and maintenance cost

ALUMINIUM LAMINATED JACKET (SOUNDROPAFS)

- High resistance to wear and tear
- Impermeable to UV rays
- Highly resistant to UV rays
- 98% reflective
- Resistant to chemicals

PE OUTER JACKET (SOUNDROPAFS.P)

- Highly vibration resistant
- High resistance to wear and tear
- Impermeable to UV rays
- Resistant to chemicals
- Easy care

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Flame Spread index = 0) (Smoke Developed index = 0)
- No fiber erosion
- Minimum energy loss
- Perfect insulation property
- No-condensation

TECHNICAL PROPERTIES

TYPE	SOUNDROPAFS	SOUNDROPAFS.P
Fire Resistance	Non-combustible + Difficult to ignite	Non-combustible inner duct
Inner Duct Construction	1 ply aluminium (perforated)	1 ply aluminium (perforated)
Jacket Construction	1 ply aluminium, 2 ply polyester	1 ply PE
Nominal Thickness (Inner Duct / Jacket)	90 micron / 45 micron	90 micron / 100 micron
Available Diameters	Ø 100 / 125 / 160 / 200 / 250 mm	Ø 100 / 125 / 160 / 200 / 250 mm
Temperature Range	-25 °C / +250 °C	
Air Velocity	25 m/s (max)	25 m/s (max)
Operating Pressure	2000 Pa (max)	2000 Pa (max)
Insulation	Glass wool	Glass wool
Insulation Thickness	25 mm	25 mm
Insulation Density	16 kg/m³	16 kg/m³
Standard Length	0.5 m / 1.0 m (+ 5 cm + 5 cm coupling)	0.5 m / 1.0 m (+ 5 cm + 5 cm coupling)
Packing	Single cardboard box	Single cardboard box

FIRE CERTIFICATE

Europe (EN 13501-1)

Class A1 (inner flexible air duct)

Class A1 (inner flexible air duct)

CERTIFICATE

Russia



GOST-R

GOST-R

Available on request

- Customized lengths
- Private label
- 80 micron aluminium
- 120 micron aluminium
- Insulated type
- Bulk packing



NON-INSULATED ALUMINIUM FLEXIBLE AIR DUCTS



TYPES:

SOUNDROPAFS-NW
(M1, difficult to ignite)

SOUNDROPAFS-NW.PE
(Difficult to ignite)

NO-CONDENSATION

SOUNDROPAFS-NW

- SOUNDROPAFS-NW thermally and acoustically insulated flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.
- SOUNDROPAFS-NW has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.
- The fire resistance of SOUNDROPAFS-NW has been tested and certified by various international bodies.

PROPERTIES & ADVANTAGES

NONWOVEN CONSTRUCTION

- Difficult to ignite (SONOAFS-NW)
- High resistance to UV rays
- Impermeable to UV rays
- Dampens mechanical vibration
- Excellent sound attenuation
- Fibre-migration proof
- Resistant to chemicals
- Suitable for hospital, school & clean room applications

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723
(Flame Spread index = 0)
(Smoke Developed index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

PE OUTER JACKET

- High vibration resistance
- High resistance to wear and tear
- Impermeable to UV rays
- Resistant to chemicals
- Easy care

TECHNICAL PROPERTIES

TYPE	SOUNDROPAFS-NW	SOUDNROPAFS-NW.PE
Fire Resistance	Difficult to ignite	Difficult to ignite
Inner Duct Construction	1 ply Nonwoven Fabric	1 ply Nonwoven Fabric
Jacket Construction	1 ply aluminium + 2 ply polyester	1 ply PE
Nominal Thickness (Inner Duct / Jacket)	600 micron / 45 micron	600 micron / 100 micron
Available Diameters	Ø 100 / 125 / 160 / 200 / 250 mm	Ø 100 / 125 / 160 / 200 / 250 mm
Temperature Range	-20 °C / + 90 °C	-20 °C / + 90 °C
Air Velocity	20 m/s (max)	20 m/s (max)
Operating Pressure	1500 Pa (max)	1500 Pa (max)
Insulation / Thickness / Density	Glass wool / 25 mm / 16 kg/m³	Glass wool / 25 mm / 16 kg/m³
Thermal Conductivity	k = 0.037 W/mK	k = 0.037 W/mK
Standard Length	0.5 m / 1.0 m (+ 5 cm + 5 cm coupling)	0.5 m / 1.0 m (+ 5 cm + 5 cm coupling)
Packing	Single cardboard box	Single cardboard box

Available on request

- Customized lengths
- Private label
- Black & white polyester colors
- Black PE color
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation

Insulation Options Available





TYPES:
SILENCERAFS
SILENCERAFS.D

NO-CONDENSATION

SILENCERAFS

- SILENCERAFS circular duct type multipurpose sound absorbers are specifically produced for low and medium pressure heating, cooling, ventilation, and air conditioning systems.
- SILENCERAFS is produced from multi-layer aluminium and polyester (perforated), strengthened with high tension hard steel spring wire, surrounded with glass wool insulation.
- The insulation material is surrounded with either a plain aluminium vapour barrier or a multi-layer aluminium and polyester, high tension hard steel spring wire reinforced jacket.
- SILENCERAFS is available both in Difficult to ignite and Limited combustibility versions.
- SILENCERAFS can be easily fitted to circular, oval, or rectangular connectors.
- SILENCERAFS has been tested and certified by various international bodies.

PROPERTIES & ADVANTAGES

PERFORATED ALUMINIUM LAMINATED INNER FLEXIBLE DUCT

- Reduces noise level
- Difficult to ignite
- High resistance to UV rays
- Resistant to chemicals
- Maintenance free

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust-proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Smoke developed index = 0) (Flame spread index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

ALUMINIUM LAMINATED JACKET

- Difficult to ignite (Certified)
- High resistance to wear and tear
- Impermeable to UV rays
- High resistance to UV rays
- 98% reflective
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	SILENCERAFS	SILENCERAFS.D
Fire Resistance	Difficult to ignite	Difficult to ignite
Inner Duct Construction	3 ply aluminium + 2 ply polyester (perforated)	3 ply aluminium + 1 ply polyester (perforated)
Jacket Construction	1 ply aluminium + 2 ply polyester	3 ply aluminium + 2 ply polyester (hard steel spring wire reinforced)
Nominal Thickness (Inner Duct / Jacket)	70 micron / 45 micron	74 micron / 70 micron
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 52 mm – Ø 710 mm
Temperature Range	-30 °C / +150 °C	-30 °C / +250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Insulation	Glass wool	Glass wool
Insulation Thickness	25 mm	25 mm
Insulation Density	16 kg/m ³	16 kg/m ³
Standard Length	0.5 m / 1.0 m	0.5 m / 1.0 m
Packing	Several pieces in a cardboard box	Several pieces in a cardboard box

Available on request

- Customized lengths
- Private label
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- M0 + M1
- M0 + M0 (only for SILENCERAFS.D)

Insulation Options Available





TYPES:
SILENCERAFS PLUS
SILENCERAFS.D PLUS

NO-CONDENSATION

SILENCERAFS PLUS

- SILENCERAFS PLUS circular duct type multipurpose sound absorbers are specifically produced for low and medium pressure heating, cooling, ventilation, and air conditioning systems.
- SILENCERAFS PLUS is produced from multi-layer aluminium and polyester (perforated), strengthened with high tension hard steel spring wire, surrounded with glass wool insulation.
- The insulation material is surrounded with either a plain aluminium vapour barrier or a multi-layer aluminium and polyester, high tension hard steel spring wire reinforced jacket.
- SILENCERAFS PLUS is available both in Difficult to ignite and Limited combustibility versions.
- SILENCERAFS PLUS can be easily fitted to circular, oval, or rectangular connectors.
- SILENCERAFS PLUS has been tested and certified by various international bodies.

PROPERTIES & ADVANTAGES

PERFORATED ALUMINIUM LAMINATED INNER FLEXIBLE DUCT

- Reduces noise level
- Difficult to ignite
- High resistance to UV rays
- Resistant to chemicals
- Maintenance free

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss
- Anti-static
- Dust-proof interior

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Smoke developed index = 0) (Flame spread index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

ALUMINIUM LAMINATED JACKET

- Difficult to ignite (Certified)
- High resistance to wear and tear
- Impermeable to UV rays
- High resistance to UV rays
- 98% reflective
- Resistant to chemicals

TECHNICAL PROPERTIES

TYPE	SILENCERAFS PLUS	SILENCERAFS.D PLUS
Fire Resistance	Difficult to ignite	Difficult to ignite
Inner Duct Construction	3 ply aluminium + 2 ply polyester (perforated)	3 ply aluminium + 1 ply polyester (perforated)
Jacket Construction	1 ply aluminium + 2 ply polyester	3 ply aluminium + 2 ply polyester (hard steel spring wire reinforced)
Nominal Thickness (Inner Duct / Jacket)	70 micron / 45 micron	74 micron / 70 micron
Available Diameters	Ø 52 mm – Ø 800 mm	Ø 52 mm – Ø 710 mm
Temperature Range	-30 °C / +150 °C	-30 °C / +250 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Operating Pressure	3000 Pa (max)	3000 Pa (max)
Insulation	Glass wool	Glass wool
Insulation Thickness	25 mm	25 mm
Insulation Density	16 kg/m ³	16 kg/m ³
Standard Length	0.5 m / 1.0 m	0.5 m / 1.0 m
Packing	Several pieces in a cardboard box	Several pieces in a cardboard box
FIRE CERTIFICATE		
Italy	Class 1	Class 1

Available on request


- Customized lengths
- Private label
- 38, 40 mm & 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- M0 + M1
- M0 + M0 (only for SILENCERAFS.D)

Insulation Options Available





NO-CONDENSATION

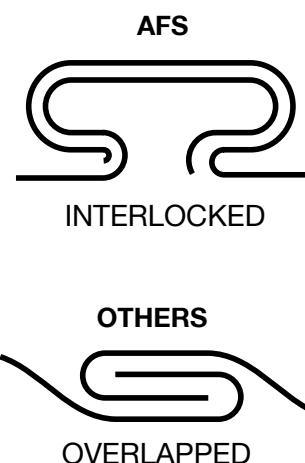

TECHNICAL PROPERTIES

TYPE	PHONIC SEMIAFS
Fire Resistance	Non-combustible
Inner Duct Construction	1 ply aluminium
Nominal Thickness of Inner Duct	90 micron (perforated)
Jacket Construction	1 ply aluminium
Nominal Thickness of Jacket	90 micron
Available Diameters	Ø 80 mm – Ø 450 mm
Temperature Range	-25 °C / +250 °C
Air Velocity	25 m/s (max)
Operating Pressure	2000 Pa (max)
Insulation	Glass wool
Insulation Thickness	25 mm
Insulation Density	16 kg/m ³
Standard Length	1,5 m
Packing	Single cardboard box
FIRE CERTIFICATE	
Europe (EN 13501-1)	Class A1 (inner duct) Class A1 (outer duct)

Available on request

- PHONIC SEMIAFS aluminium semi flexible air ducts are flexible, extendable and highly reliable for low and medium pressure air conditioning, ventilation and boiler systems.
- Airtight PHONIC SEMIAFS is produced from perforated aluminium surrounded with glass wool insulation and an aluminium vapour barrier.
- Oval and circular connectors are easily installed.
- PHONIC SEMIAFS is secured using an “INTERLOCK” crimp system. “INTERLOCK” crimp systems minimize separation of the duct when it is stretched or bent.

PROPERTIES & ADVANTAGES

PURE ALUMINIUM BODY

- Non-combustible
- Resistant to chemicals

ALUMINIUM JACKET

- Difficult to ignite
- Resistant to chemicals

SEMI-FLEXIBLE & INTERLOCK CONSTRUCTION

- Easy to transport & store
- Quick and easy installation
- Inseparable
- Leak proof
- Airtight
- Energy efficiency
- Low operational and maintenance cost

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Flame Spread Index = 0) (Smoke Developed Index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- Non-condensation

- Customized lengths
- Private label
- 25 mm glass wool insulation
- 16 kg/m³ glass wool insulation



TYPES:
SLEEVEAFS.ALUMINIUM
(Aluminium jacket)
SLEEVEAFS.PE
(PE jacket)

SLEEVEAFS

- SLEEVEAFS air duct insulation materials are ready to use insulation elements which are specifically produced for circular and/or oval air duct insulation.
- Airtight SLEEVEAFS is produced from glass wool and covered with jacket. The outer jacket protects the insulating material and also serves as a vapour barrier.
- SLEEVEAFS is fast and easy to install.
- The fire resistance of SLEEVEAFS has been tested and certified by various international bodies.

PROPERTIES & ADVANTAGES

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Easy to install
- Low installation cost
- High durability

ALUMINIUM LAMINATED JACKET (SLEEVEAFS.ALUMINIUM)

- Difficult to ignite (Certified)
- High resistance to wear and tear
- Impermeable to UV rays
- Highly resistant to UV rays
- 98 % reflective
- Resistant to chemicals

PE JACKET (SLEEVEAFS.PE)

- High vibration resistant
- High resistance to wear and tear
- Impermeable to UV rays
- Resistant to chemicals

GLASS WOOL INSULATION

- Heat resistant (Certified, EN 13501-1, Class A1)
- UL 723 (Smoke developed index = 0) (Flame spread index = 0)
- No fiber erosion
- Minimal energy loss
- Perfect insulation property
- No-condensation

TECHNICAL PROPERTIES

TYPE	SLEEVEAFS.ALUMINIUM	SLEEVEAFS.PE
Jacket Construction	1 ply aluminium 2 ply polyester	1 ply PE
Nominal Thickness of Jacket	45 micron	100 micron
Available Diameters (according to inner duct)	Ø 52 mm – Ø 800 mm	Ø 52 mm – Ø 800 mm
Temperature Range	-30 °C / +150 °C	-30 °C / +90 °C
Insulation	Glass wool	Glass wool
Insulation Thickness	25 mm	25 mm
Insulation Density	16 kg/m ³	16 kg/m ³
Standard Length	5 m	5 m
CERTIFICATE		
Russia	GOST-R	GOST-R

Available on request

- Customized lengths
- Private label
- White polyester insulation
- 50 mm glass wool insulation
- 24 kg/m³ glass wool insulation
- Black PE color

Insulation Options Available



ALTERNATIVE CONSTRUCTIONS

PRODUCT NAME	Difference from the standard type
SLEEVEAFS.ALUMINIUM-R8 SLEEVEAFS.PE-R8	R 8.0 glass wool insulation
SLEEVEAFS.ALUMINIUM-R16 SLEEVEAFS.PE-R16	100 mm glass wool insulation
SLEEVEAFS.ALUMINIUM.B SLEEVEAFS.PE.B	Polyester barrier



INDUSTRIAL HOSES



TYPES:
TPU 05
TPU 07
TPU 10

AFSTPU

- AFSTPU is produced by 100% thermoplastic polyester polyurethane and reinforced by high tension copper coated steel wire. There are three standard types of thickness for various applications.
- AFSTPU is suitable for applications that require high pressure and vacuum resistance. It has leak proof structure and its flexibility is convenient to use in wood industry, metal industry, metal processing, welding extraction, surface cleaning, glass, cement, ceramic, paper and automotive industries.
- Due to its high resistance to chemicals, AFSTPU is long lasting solution for industrial applications.

PROPERTIES & ADVANTAGES

- Chemical resistance
- High flow rate
- Superior abrasion resistance
- Long shelf life
- Flex & Shock resistance
- Lightweight by Design
- Clean core tubes (non-contaminating)



TECHNICAL PROPERTIES

TYPE	TPU 05	TPU 07	TPU 10
Wall	100% Polyester Polyurethane	100% Polyester Polyurethane	100% Polyester Polyurethane
Wire	Copper coated spring steel wire	Copper coated spring steel wire	Copper coated spring steel wire
Thickness	0,5 mm	0,7 mm	1,0 mm
Temperature Range	-40 °C / +90 °C	-40 °C / +90 °C	-40 °C / +90 °C
Diameter Range	Ø 30 mm – Ø 305 mm	Ø 30 mm – Ø 305 mm	Ø 30 mm – Ø 305 mm
Lenght	6 m / 10 m	6 m / 10 m	6 m / 10 m
Packing Type	Plastic bag	Plastic bag	Plastic bag

APPLICATION AREAS

Wood Prep. Machines	Pump hoses
Refuse collection vehicles	Spray dispensation
Paint industry	Rail cleaning
Glass particles transportation	Chaff extraction
Glass & Rock wool transportation	Ceramic industry
Grass cutting devices	Liquid transportation
Cement transportation	Quarries
Suction/ transport for high abrasive materials	Fresh air units
Suction/ transport for light & medium abresive materials	Textile fibre transportation
Discharge units	Textile industry
Foundries	Dockyard industry
Smoke & Polluted air exhaust	Dust extraction
Industrial vacuum cleaners	Oil mist extraction
Fan hoses	Surface cleaning
Cesspit and waste water treatment plant	Petrochemical industry
Gas transportation	Packaging industry
Iron & Steel industry	Automotive industry
Heating, cooling & ventilation	Metal chips & dust transportation
Cuttle units	Grease transportation
Paper industry	Gravel transportation
Welding works	Harbour installations
Chemicals transportation	Small particles transportation
Tile industry	Quartz works
Control cabinets	Sand transportation

Available on request

- Customized lengths
- Private label



TYPES:

VINYLAFS-TRANSPARENT
(Positive Pressure)

VINYLAFS-TRANSPARENT DW
(Negative Pressure)

TECHNICAL PROPERTIES

TYPE	VINYLAFS-TRANSPARENT	VINYLAFS-TRANSPARENT.DW
Construction	1 ply PVC	1 ply PVC
Nominal Thickness	200 micron	200 micron
PVC Color	Transparent	Transparent
Available Diameters	Ø 82 mm - Ø 508 mm	Ø 82 mm - Ø 508 mm
Temperature Range	-30 °C / +80 °C	-30 °C / +80 °C
Air Velocity	30 m/s (max)	30 m/s (max)
Standard Length	6 m	6 m
Packing	Single cardboard box	Single cardboard box

In your requests, please mention the application (positive or negative pressure)

Available on request

- Customized lengths
- Private label

VINYLAFS-TRANSPARENT

- VINYLAFS-TRANSPARENT non-insulated industrial PVC flexible air ducts are specifically produced and designed where vacuum systems are needed.
- It can also be used for transferring wood shavings and rough particulars and in applications with excessive vibration and/or perpetual motion systems.
- It is produced from PVC strips with high tension steel spring wire.
- VINYLAFS-TRANSPARENT is airtight.
- VINYLAFS-TRANSPARENT is elastic and flexible. It can be easily fitted to circular, oval, or rectangular connectors.

PROPERTIES & ADVANTAGES

PVC CONSTRUCTION

- High vibration resistance
- Impermeable to UV rays
- Resistant to chemicals

FLEXIBLE & SEAMLESS CONSTRUCTION

- Easy to store
- Easy to transport
- Low installation cost
- High resistance to wear and tear
- Airtight
- Low operation and maintenance costs

SMOOTH INNER SURFACE

- Minimum pressure loss

HIGH TENSION STEEL WIRE

- High durability
- High resistance to deformation
- Easy to install



VENTILATION EQUIPMENT




EXHAUST METAL AIR DISC VALVES

Exhaust type metal air disc valves are specifically designed for low and medium pressure ventilation systems.

- Available diameters are 100mm, 125mm, 150mm, 160mm & 200 mm
- Easy installation on wall or ceiling
- Manufactured from sheet steel painted white RAL9010 satin
- The valve body is equipped with a cellular plastic gasket to form air tight seal
- The air flow is adjusted by rotating the control disc
- Simple and effective design for easy application
- Supplied with mounting ring
- Mounting ring is made of galvanized steel sheet

EXHAUST MODEL	SIZE	DIMENSIONS (mm)			
		Ø A	Ø B	C	Ø D
CONAIR 26	Ø 100	138	75	40	97.5
CONAIR 27	Ø 125	164	100	46	122.5
CONAIR 28	Ø 150	202	120	50	147.5
CONAIR 29	Ø 160	211	130	54	157.5
CONAIR 30	Ø 200	248	158	63	197.5

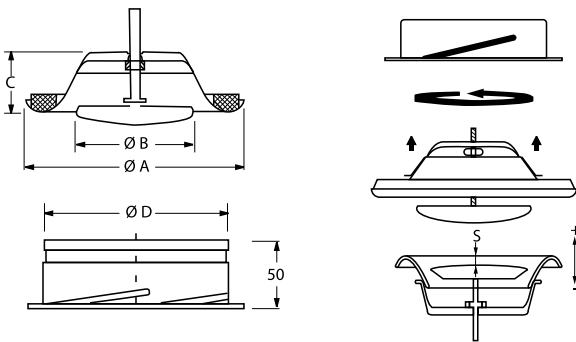

QUICK SELECTION CHART (EXHAUST TYPE)


EXHAUST	AIR FLOW (L/S) AT SOUND LEVEL		
	25 dB (A)	30 dB (A)	35 dB (A)
CONAIR 26	30	37	45
CONAIR 27	46	57	68
CONAIR 28	58	70	81
CONAIR 29	64	80	98
CONAIR 30	120	140	170

SUPPLY METAL AIR DISC VALVES

Supply type metal air disc valves are specifically designed for low and medium pressure ventilation systems.


- Available diameters are 100mm, 125mm, 150mm, 160mm & 200 mm
- Easy installation on wall or ceiling
- Manufactured from sheet steel painted white RAL9010 satin
- The valve body is equipped with a cellular plastic gasket to form air tight seal
- The air flow is adjusted by rotating the control disc
- Simple and effective design for easy application
- Supplied with mounting ring
- Mounting ring is made of galvanized steel sheet

SUPPLY MODEL	SIZE	DIMENSIONS (mm)			
		Ø A	Ø B	C	Ø D
CONAIR 26 S	Ø 100	138	92	40	97.5
CONAIR 27 S	Ø 125	164	111	46	122.5
CONAIR 28 S	Ø 150	202	135	50	147.5
CONAIR 29 S	Ø 160	211	147	54	157.5
CONAIR 30 S	Ø 200	248	194	63	197.5

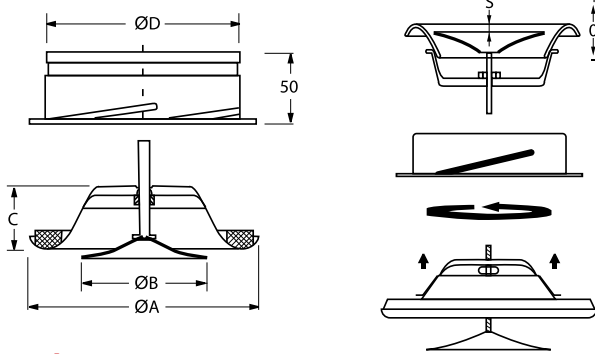

QUICK SELECTION CHART (SUPPLY TYPE)

SUPPLY	AIR FLOW (L/S) AT SOUND LEVEL		
	25 dB (A)	30 dB (A)	35 dB (A)
CONAIR 26 S	20	24	30
CONAIR 27 S	40	48	57
CONAIR 28 S	59	68	80
CONAIR 29 S	50	58	65
CONAIR 30 S	80	100	120


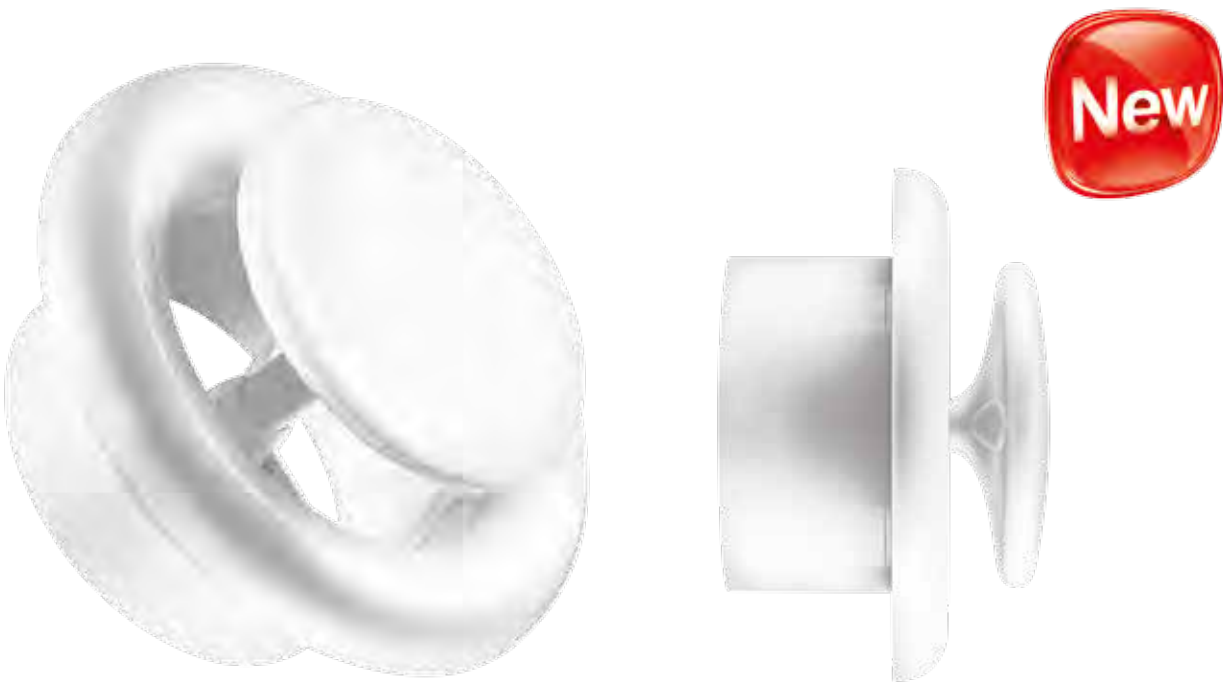


P SMART AIR DISC VALVES

- Very low pressure values are obtained by the CFD analysis and verified by the tests in the laboratory complying with ASHRAE 70 standard.
- No corrosion, locking and color change by eliminating metallic locknut and manufacturing adjustable lid from plastic.
- Instant mounting with elegant, light and smart mounting ring.
- Different design eliminating choked flow through cross sectional area as there is no restriction of flow and conserving flow regime the line through flexible air duct.
- An fully-airtight product contributing to indoor air quality and hygiene of attics by eliminating the parts causing air leakage with developed design inspired by CFD Simulation.

PROPERTIES & ADVANTAGES

- Mounting in 1 minute: Intellectual design enabling easy and quick mounting on the wall and ceiling.
- Energy Saver: Optimum aerodynamic design ensuring very low pressure loss for supply and exhaust.
- Recyclable: it is made from ABS plastic entirely.
- Aesthetic compatibility with indoor ambience. Resistant to external impacts and having aesthetic appereance.
- Contributing to have better indoor air quality and highly effecienc in use. Integrated design eliminating air leakages.

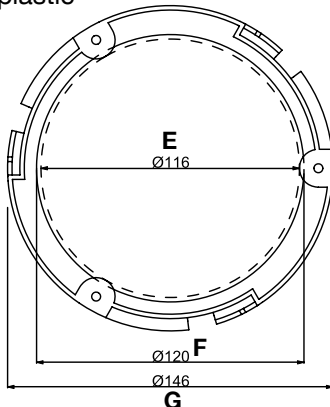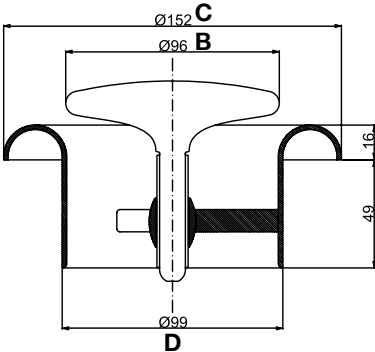


CONAIR P SMART	Ø 100	Ø 125	Ø 150
A (mm)	50	38	38
Ø B (mm)	96	121	146
Ø C (mm)	152	177	202
Ø D (mm)	99	124	149
Ø E (mm)	116	141	166
Ø F (mm)	120	145	170
Ø G (mm)	146	171	196


PLASTIC AIR DISC VALVES

- Available diameters are 100mm, 125mm, 150mm & 200 mm
- Simple and effective design for easy application
- Supplied with an airtight snap on mounting flange
- Adjustable air flow rate by centric, rotating valve
- Easy to remove for maintenance and cleaning
- Heat resistance up to +100 C°
- UV resistance
- Can be fitted directly to rigid ducting

TECHNICAL PROPERTIES

MODEL	SIZE	DIMENSIONS (mm)					
		Ø A	Ø B	C	D	E	F
CONAIR 21	Ø 100	99	146	90	92	63	47
CONAIR 22	Ø 125	124	165	78	111	63	45
CONAIR 23	Ø 150	148	185	100	142	66	52
CONAIR 24	Ø 200	199	246	106	187	79	59

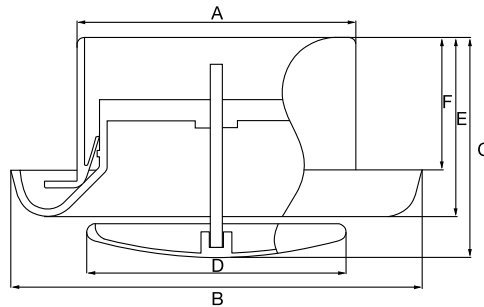

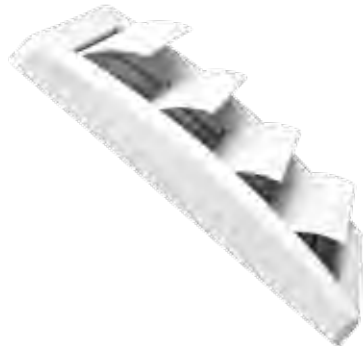


L SMART LINEAR GRILL

- Aesthetic New design
- Excellent design for both supply & exhaust ventilation
- High quality components
- Easy maintenance
- Exchangeable collars
- Easy & practical montage to both walls & ducts

TECHNICAL PROPERTIES

MODEL		DIMENSIONS (mm)	
	Ø D		
CONAIR 1040	-		
CONAIR 1041	Ø 100		
CONAIR 1042	Ø 125		
CONAIR 1043	Ø 150		

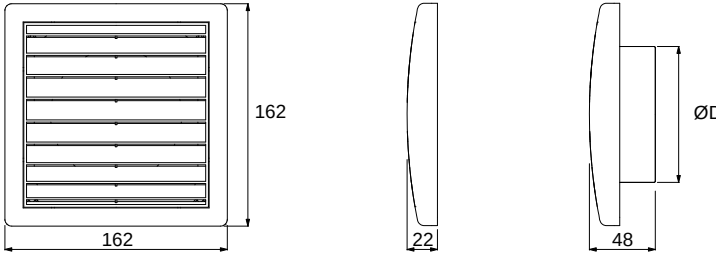


G SMART GRAVITY LOUVER

- Aesthetic New design
- Excellent design for exhaust ventilation
- High quality components
- Easy maintenance
- One way air flow from indoors towards outdoors
- Louvres balanced to give good air flow at appropriate pressure level
- Exchangeable collars
- Easy & practical montage to both walls & ducts

TECHNICAL PROPERTIES

MODEL		DIMENSIONS (mm)	
	Ø D		
CONAIR 1044	-		
CONAIR 1045	Ø 100		
CONAIR 1046	Ø 125		
CONAIR 1047	Ø 150		

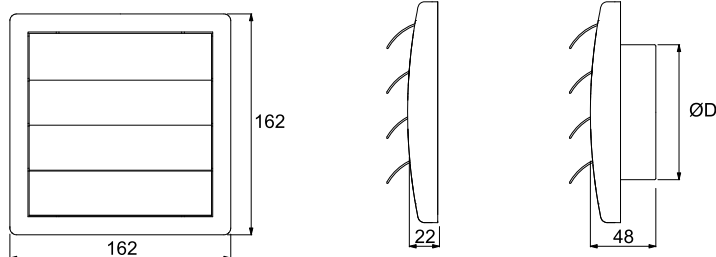



C SMART COWL OUTLET

- Aesthetic New design
- Excellent design for both supply & exhaust ventilation
- High quality components
- Easy maintenance
- No return flap
- For outdoors suitable for tumble drier extraction
- Exchangeable collars
- Easy & practical montage to both walls & ducts

TECHNICAL PROPERTIES

MODEL		DIMENSIONS (mm)	
		Ø D	
CONAIR 1048		-	
CONAIR 1049		Ø 100	
CONAIR 1050		Ø 125	
CONAIR 1051		Ø 150	

GRILLS & DIFFUSERS



CEILING DIFFUSER

- Economical high performance diffuser
- Providing an architecturally pleasing ceiling effect
- Excellent design for surface mounting applications
- Multi-layer cone can divide the air into many layers of swift puffs
- Smoothly balances the flow and temperature of the air.
- Durable Round coupling corner

TECHNICAL PROPERTIES

MODEL	DIMENSIONS (mm)		
	Ø A	Ø B	C
CONAIR 31	Ø 100	141	70
CONAIR 32	Ø 125	166	72
CONAIR 33	Ø 150	188	72
CONAIR 34	Ø 200	240	72
CONAIR 35	Ø 250	294	78
CONAIR 36	Ø 315	371	83





COWL OUTLET

NO RETURN FLAP

- Excellent design for exhaust ventilation
- For outside use, suitable for tumble drier extraction
- High quality components
- Practical mounting
- Easy maintenance

TECHNICAL PROPERTIES

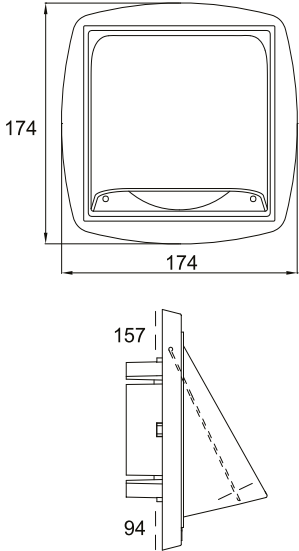
MODEL	DESCRIPTION	SIZE	DIMENSIONS (mm)
CONAIR 012	Cowl Outlet with return flap	174 x 174 mm Ø 94 - 157 mm	
CONAIR 037	Cowl Outlet with mosquito net	174 x 174 mm Ø 94 - 157 mm	

LINEAR GRILLS

with ADJUSTABLE COLLAR

- Excellent design for both supply & exhaust ventilation
- Convenient for wall and ceiling application
- High quality components
- Easy maintenance
- Mosquito net optional
- Durable round coupling corner

TECHNICAL PROPERTIES

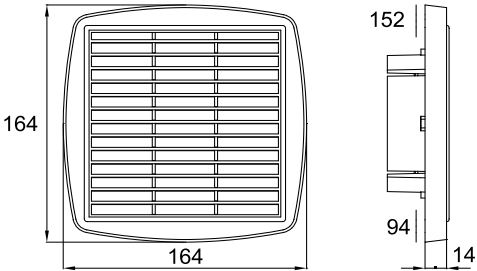MODEL	DESCRIPTION	SIZE	DIMENSIONS (mm)
CONAIR 005	Square linear grill with adjustable collar	164 x 164 Ø 94 - 152	



GRAVITY LOUVERS

with 4 SET COLLAR

- Excellent design for exhaust ventilation
- One way airflow from indoors towards outdoors
- Louvres balanced to give good air flow at appropriate pressure level
- High quality components
- Practical mounting secured by latches
- Easy maintenance

TECHNICAL PROPERTIES

MODEL	DESCRIPTION	SIZE	DIMENSIONS (mm)
CONAIR 025	Gravity louver with 4 set collar	162 x 162 mm Ø 98 mm, Ø 108 mm, Ø 118 mm, Ø 123 mm	

GRAVITY LOUVERS

with ADJUSTABLE COLLAR

- Excellent design for exhaust ventilation
- One way airflow from indoors towards outdoors
- Louvres balanced to give good air flow at appropriate pressure level
- High quality components
- Practical mounting secured by latches
- Easy maintenance
- Mosquito net upon request

TECHNICAL PROPERTIES

MODEL	DESCRIPTION	SIZE	DIMENSIONS (mm)
CONAIR 014	Gravity louver with adjustable collar	174 x 174 Ø 97 - 157	



DOOR TRANSFER GRILLS

- Allows air circulation
- Double sided
- Overlapping V-shaped blades
- For mounting on doors in WC areas, showers, swimming pools etc.
- Various color options on demand
- Both parts of the grill are joined together by screws
- Made of high quality plastic

TECHNICAL PROPERTIES

MODEL	DESCRIPTION	SIZE	DIMENSIONS (mm)
CONAIR 019	Door transfer grill	300 x 80	
CONAIR 020	Door transfer grill	404 x 90	

MONTAGE
&
FITTING
ELEMENTS



AFSCONNECTOR

COATING TYPE

- **AFSCONNECTORs** can be produced of PVC, SILICONE, PU, NEOPRENE or CANVAS as per application requirements
- **OTHER GENERAL PROPERTIES**
- **AFSCONNECTORs** are leak proof (airtight & water proof)
- They are suitable for rectangular, oval and circular applications, and easy to install.

SPECIAL SIZE


- **100x120x100 AFSCONNECTOR's** wide galvanized steel plates make it compatible with roll forming and flange manufacture systems.

APPLICATION

- **AFSCONNECTOR** is specifically designed for heating, cooling, ventilation and air conditioning systems.
- **AFSCONNECTORs** are used to connect mechanical equipment and rigid air duct or two rigid air ducts, providing dampening against vibration and absorbing lateral movements.

LOCKING SYSTEM

AFSCONNECTORs are produced using a special **SAFE SEAM** technique from 'galvanized steel plate + coated fabric + galvanized steel plate'. The **SAFE SEAM** clamp system ensures that the coated fabric and the galvanized steel plates are inseparable.

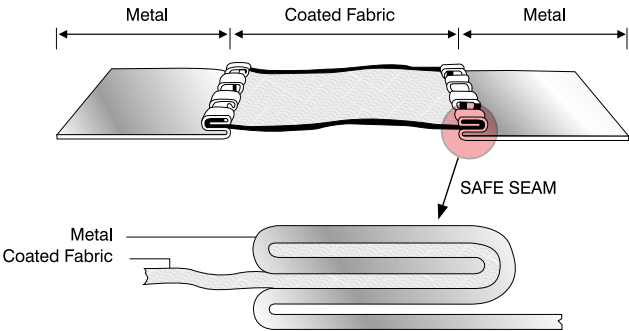

	PVC	PU	NEOPRENE	SILICONE	CANVAS
Base Fabric	Polyester	Fiber glass	Fiber glass	Fiber glass	Cotton
Coating	PVC (Both Sides)	PU (Both Sides)	Neoprene (Both Sides)	Silicone (Both Sides)	Chemical Coating
Color	Grey & Black	Grey & Black	Black	Grey	Green
Temperature Range	- 30 °C /+80 °C	- 30 °C /+100 °C	- 30 °C /+100 °C	- 50 °C /+260 °C	+80 °C
Fire Resistance	Fire Retardant	Fabric: non-combustible Coating: fire retardant	Fabric: non-combustible Coating: fire retardant	Fabric: non-combustible Coating: flame proof	Fire Retardant
Specifications	Suitable for general applications Economical choice	High resistance to abrasion Suitable for high temperature applications for a certain period of time (400 °C / 2 h)	Suitable for high velocity applications and outdoor conditions High resistance to alkalis and gasoline	Suitable for high temperature applications (400 °C / 2 h) High resistance to weathering and chemicals	Versatile and cost effective Resistant to humidity and mildew

FIRE CERTIFICATE	PVC	PU	NEOPRENE	SILICONE	CANVAS
France	-	M0	-	-	-
USA	UL 723	UL 723	UL 723	-	-
USA	-	NFPA 701 (Formerly UL 214)	NFPA 701 (Formerly UL 214)	-	-
SPAIN	-	F-400 (400 °C / 2 h)	-	F-400 (400 °C / 2 h)	-

CERTIFICATE	PVC	PU	NEOPRENE	SILICONE	CANVAS
Russia	GOST - R	GOST - R	GOST - R	GOST - R	GOST - R

Construction Galvanized steel plate + Coated fabric + Galvanized steel plate

Packing Single Cardboard Box

METAL + COATED FABRIC + METAL	LENGTH	CARDBOARD BOX
35mm+60mm+35mm	25 m	430mm x 180mm x 430mm
35mm+60mm+35mm	50 m	500mm x 180mm x 500mm
45mm+60mm+45mm	25 m	430mm x 180mm x 430mm
45mm+60mm+45mm	50 m	500mm x 180mm x 500mm
45mm+75mm+45mm	25 m	430mm x 180mm x 430mm
45mm+75mm+45mm	50 m	500mm x 180mm x 500mm
45mm+100mm+45mm	25 m	430mm x 180mm x 430mm
45mm+100mm+45mm	50 m	500mm x 180mm x 500mm
45mm+150mm+45mm	25 m	430mm x 250mm x 430mm
45mm+150mm+45mm	50 m	500mm x 250mm x 500mm
50mm+60mm+50mm	25 m	430mm x 180mm x 430mm
50mm+60mm+50mm	50 m	500mm x 180mm x 500mm
70mm+100mm+70mm	25 m	430mm x 250mm x 430mm
70mm+100mm+70mm	50 m	500mm x 250mm x 500mm
70mm+150mm+70mm	25 m	430mm x 300mm x 430mm
70mm+200mm+70mm	25 m	430mm x 300mm x 430mm



AFS CIRCULAR PU CONNECTOR KIT

APPLICATION

- **AFS CIRCULAR PU CONNECTORs** are specifically designed for heating, cooling, ventilation and air conditioning systems.
- **AFS CIRCULAR PU CONNECTORs** kits have perfect solution for noise and vibration caused by ventilation equipment transmitted through air duct system
- **AFS CIRCULAR PU CONNECTORs** are leak proof (airtight & water proof)
- **The circular connector is available in kit form with two fastening metal clamps in plastic bag**

ADVANTAGES

- Low installation cost
- Low operational cost
- Energy efficient
- Easily stored
- Easily transported
- Easily installed
- Maintenance free

PACKING

- 1 set per nylon bag
(AFS CIRCULAR PU CONNECTOR + 2 Metal clamps)
- 10 nylon bags / box

TECHNICAL PROPERTIES

AFS CIRCULAR PU CONNECTOR		
Base fabric	Fiber glass	
Coating	PU (both sides)	
Color	Grey & Black	
Temperature range	-30 °C / + 100 °C	
Fire resistance	Fabric: non-combustible Coating: fire retardant	
FIRE CERTIFICATE		
France		M0
CERTIFICATE		
Russia		GOST-R

METAL CLAMPS

- Low carbon steel galvanized components
- Galvanized steel (free of hexavalent chromium screw
- Ferritic stainless steel ring (AISI 430 EN 1.4016)

STANDARD DIMENSIONS

DUCT DIAMETER (mm)	AFS CIRCULAR PU CONNECTOR WIDTH (mm)	METAL CLAMP DIAMETER (mm)
100	160	60 – 110
125	160	60 – 135
160	160	60 – 170
200	160	60 – 215
250	200	60 – 270
315	200	60 – 325
355	200	60 – 380
400	200	60 – 425
450	200	60 – 525
500	200	60 – 525
560	200	60 – 660
630	200	60 - 660



AFS cares about
the workmen's safety!

AFSPIN

- AFS self-adhesive pins are designed for fitting insulation materials to smooth surfaces without using any additional tools.
- Quick and easy application.
- It can be used for fitting rigid or flexible insulation materials such as glass wool, rock wool, polistiren, polyethylene foam, insulation cork boards, etc.
- Operating temperature range of AFS PIN is -10 °C / +80 °C. Application temperature has to be above +10 °C.
- The surface applied on has to be free of any residues, dust, grease, oil, etc.
- AFS self-adhesive pins are packed in cardboard boxes after PE bagged. This unique packing secures conditions that hold its adhesive properties. They can be transported, stocked and used safely, easily and practically.

PROPERTIES & ADVANTAGES

ALUMINIUM PIN

- Easy to cut, bend and mount
- Corrosion free

ALUMINIUM PIN WITH SAFE TIP

- Provides safe working environment
- Needs no pin cap

REINFORCED GALVANIZED STEEL BASE

- Ensures a flat base
- Ensures maximum adherence

GALVANIZED WASHERS

- Easy to fit, impossible to remove

QUANTITY OF SELF-ADHESIVE PINS PER SQUARE METER (m²)

INSULATION MATERIAL		SURFACE TEMPERATURE			
Density	Thickness	23 °C	40 °C	60 °C	80 °C
20 kg/m³	25 mm	4	4	4	4
	50 mm	4	4	4	4
40 kg/m³	25 mm	4	4	4	4
	50 mm	4	4	4	6
80 kg/m³	25 mm	4	4	4	6
	50 mm	4	4	6	8
120 kg/m³	25 mm	4	5	6	8
	50 mm	5	6	8	12

PACKING DETAILS (Base Dimension : 50 x 50)

PIN LENGTH	PACKING TYPE	PACKAGE AMOUNT
40 mm	Carton box	500 pieces with washer / box
50 mm	Carton box	500 pieces with washer / box
60 mm	Carton box	500 pieces with washer / box
80 mm	Carton box	400 pieces with washer / box
100 mm	Carton box	350 pieces with washer / box

Base dimension : 30 x 30 mm is available upon request



Operating temperature range of AFSPIN is -10 °C / +80 °C.
Application temperatures has to be above +10 °C. The surface applied on has to be free of any residues, dust, grease, oil, etc.





TYPES:

AFS TAPE PLAIN 30 micron

AFS TAPE PLAIN 40 micron

AFS TAPE PLAIN 50 micron

AFS TAPE REINFORCED
(Foil - Scrim - Kraft Tape)

AFS TAPE

- **AFS TAPE** self adhesive aluminium foil tapes are specifically produced for heating, cooling, ventilation, air conditioning and exhaust systems.
- **AFS TAPE**'s use acrylic based adhesives.
- **AFS TAPE**'s provide excellent performance in heavy conditions
- Compared to rubber based adhesives, **AFS TAPE**'s are more reliable and resistant to UV lights and cracks.
- After applying **AFS** tapes bonding strength increases by self cross linking property of acrylic polymers.
- **AFS TAPE**'s provide excellent vapour sealing on fiber glass and rock-wool duct-board and blanket systems.
- **AFS TAPE**'s can be applied even on rough and wet surfaces. Fiber glass, rock-wool, duct-board, blanket systems, sheet metals and plastic ducts are few of the application areas of **AFS TAPE**.

PROPERTIES & ADVANTAGES

- Excellent peel adhesion
- Resistant to water & fire.
- Strong initial & permanent bonding.
- Outstanding temperature & aging resistance

Remarks

- **AFS TAPE** should be kept at room temperature and stored away from wet and heat sources, humid locations and extreme conditions.
- The surface applied on has to be free of any residues, dust, grease, oil, etc.


TECHNICAL PROPERTIES

AFS TAPE	PLAIN 30 micron	Test Method
Backing Thickness	30 micron	PSTC-33 / ASTM D3652
Peel Adhesion	20 N / 25 mm	PSTC-1 / ASTM D3330
Tensile Strength	37.5 N / 25 mm	PSTC-31 / ASTM D3759
Elongation	3.0 %	PSTC-31 / ASTM D3759
Service Temperature	- 20 °C / + 120 °C	
Applying Temperature	+ 10 °C / + 40 °C	
Standard Dimensions - width	50 mm / 75 mm / 100 mm	
Length	40 m	

AFS TAPE	PLAIN 40 micron	Test Method
Backing Thickness	40 micron	PSTC-33 / ASTM D3652
Peel Adhesion	20 N / 25 mm	PSTC-1 / ASTM D3330
Tensile Strength	50 N / 25 mm	PSTC-31 / ASTM D3759
Elongation	3.0 %	PSTC-31 / ASTM D3759
Service Temperature	- 20 °C / + 120 °C	
Applying Temperature	+ 10 °C / + 40 °C	
Standard Dimensions - width	50 mm / 75 mm / 100 mm	
Length	50 m	

AFS TAPE	PLAIN 50 micron	Test Method
Backing Thickness	50 micron	PSTC-33 / ASTM D3652
Peel Adhesion	20 N / 25 mm	PSTC-1 / ASTM D3330
Tensile Strength	70 N / 25 mm	PSTC-31 / ASTM D3759
Elongation	3.5 %	PSTC-31 / ASTM D3759
Service Temperature	- 30 °C / + 120 °C	
Applying Temperature	+ 10 °C / + 40 °C	
Standard Dimensions - width	50 mm / 75 mm / 100 mm	
Length	40 m	

AFS TAPE	REINFORCED (Foil - Scrim - Kraft Tape)	Test Method
Backing Thickness	110 micron	PSTC-33 / ASTM D3652
Peel Adhesion	25 N / 25 mm	PSTC-1 / ASTM D3330
Tensile Strength	120 N / 25 mm	PSTC-31 / ASTM D3759
Elongation	1.0 %	PSTC-31 / ASTM D3759
Service Temperature	- 10 °C / + 80 °C	
Applying Temperature	+ 10 °C / + 40 °C	
Standard Dimensions - width	50 mm / 75 mm / 100 mm	
Length	40 m	

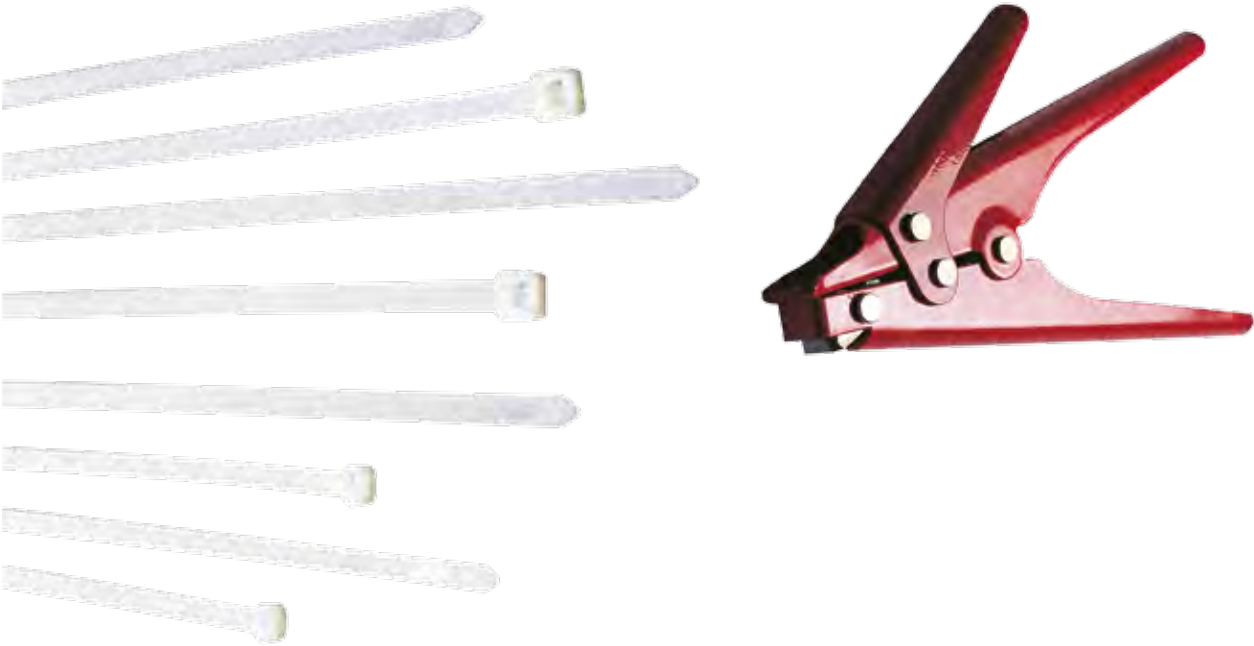

NYLON CLAMPS & PLIERS

- Nylon clamps are specifically produced for all kinds of flexible air duct connections. As an economical alternative.
- Nylon clamp edges are rounded to provide safer working environment.
- Self-locking system makes it easy and quick to apply.
- Nylon clamps can be reused.
- Nylon clamp pliers are specifically produced for an easy application and tightening of Nylon Clamps.

TECHNICAL PROPERTIES

MATERIAL	NYLON 66		
Fire Certificates	UL 94 Class V2		
	Application Range (mm)	W (mm)	L (mm)
	Ø 0 – 102	4.8	380
	Ø 0 – 140	7.6	530
	Ø 0 – 190	9.0	710
	Ø 0 – 229	9.0	800
	Ø 0 – 263	9.0	912
	Ø 0 – 360	9.0	1200



METAL CLAMPS

- Metal clamps are produced specifically for all kinds of flexible air duct connections.
- They consist of stainless steel strip and locking devices.
- Strip steel bands are produced 9 mm wide and 0.6 mm thick from AISI 430 quality stainless steel strip. Strip steel band edges are rounded to prevent damage while connecting flexible air ducts.
- Strip steel bands are packed in 30 m lengths in a plastic dispenser.
- The locking devices provide easy and fast clamping. The screw head is specially shaped so that simple tools like a screwdriver or spanner can be used. Housings are nickel plated and screws are zinc plated.
- The strip steel bonding and clip system is easily cut and installed, that makes it the fastest fixing system available. The band is cut, folded through the slot on the clamp, and taking care of the direction of the dimples on the strip, installed around the duct.

PROPERTIES & ADVANTAGES

STAINLESS STEEL STRIP	LOCKING DEVICES	STRIP STEEL CONSTRUCTION
- AISI 430 quality stainless steel - Non-flammable - Inseparable - Highly corrosion resistant - Resistant to chemicals - Maintenance free	- Non-flammable - Nickel plated housing - Zinc plated screw - Fast and simple installation - Resistant to chemicals - Low installation cost	- Easy to store - Easy to transport - Easy to install - Low installation cost

TECHNICAL PROPERTIES

METAL CLAMPS	
Clamp Construction	AISI 430 stainless steel
Locking Device Construction	Nickel plated housing, zinc plated screw
Clamp Thickness	600 micron
Clamp Width	9 mm
Standard Length (Clamp)	30 m
Packing (Clamp)	Single plastic cassette
Standard Quantity (Locking Devices)	50 pieces

DUCT COLLAR



- Duct collars are specifically designed to connect flexible air ducts to rigid air ducts.
- Made of galvanized steel with quality finishing.

AVAILABLE DIAMETERS			
102 mm	185 mm	315 mm	630 mm
127 mm	203 mm	356 mm	710 mm
133 mm	229 mm	406 mm	800 mm
140 mm	254 mm	457 mm	
152 mm	280 mm	508 mm	
160 mm	305 mm	560 mm	

METAL BACK DRAUGHT SHUTTER



- Metal back Draught Shutters are used to prevent reverse air flow.
- Made of Galvanized steel with aluminium blades.

AVAILABLE DIAMETERS	
102 mm	254 mm
127 mm	315 mm
152 mm	356 mm
160 mm	406 mm
203 mm	

ROUND AIR DAMPER



- Round Air Dampers are used for applications where air volume control is required.
- Air volume can be adjusted manually.
- Made of galvanized steel with quality finishing.

AVAILABLE DIAMETERS			
102 mm	152 mm	254 mm	406 mm
112 mm	160 mm	280 mm	457 mm
127 mm	185 mm	305 mm	508 mm
133 mm	203mm	315 mm	560 mm
140 mm	229 mm	356mm	

PLASTIC BACK DRAUGHT SHUTTER




- Plastic back Draught Shutters are used to prevent reverse air flow.
- Made of high quality plastic material.

AVAILABLE DIAMETERS	
100 mm	
125 mm	
150 mm	

TECHNICAL PROPERTIES

Ø D (mm)	a (mm)	b (mm)
100	85	-
125	62	30
150	62	30

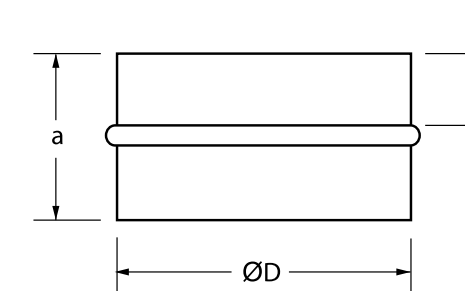





FLANGE PROFILES



- Flange profiles are designed for ensuring maximum endurance and easy splicing of air ducts.
- Made of galvanized base in accordance with TSE standards.
- Flange profiles are supplied by the inclusion of nontoxic sealant, so air tightness is achieved.

TECHNICAL PROPERTIES

	h (mm)	w (mm)
	25	31.8
	35	31.8


PERFORATED L PROFILES



- Multipurpose perforated L profiles can be used in mounting of horizontal and vertical pipe hangers, fixing of air ducts and as a support or connection element at pipe hanging systems. They can be used together with other profiles as well as they can be used separately.
- They are matched for connection elements. Holes are suitable for fitting and setting.
- Perforated L profiles are galvanize plated.

TECHNICAL PROPERTIES

A (mm)	B (mm)	S (mm)	L (mm)
30	30	3	2000
40	40	3	2000


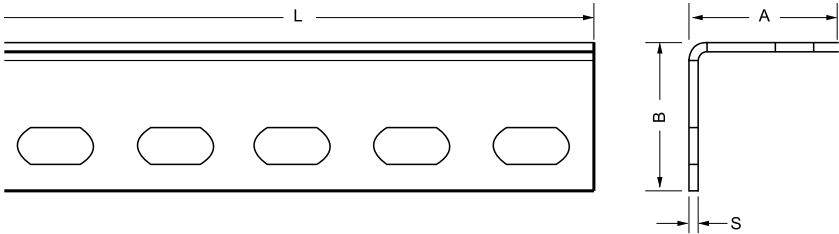


SELF DRILLING SCREWS



- Two types of self drilling screws are available; pan head (PH) and countersunk head (CSH).
- Self drilling parts at the end of each screw enable the screws to be used without drilling.

TECHNICAL PROPERTIES


PANHEAD (PH)	d x L (mm x mm)	COUNTERSUNK HEAD (CSH)	d x L (mm x mm)
	3.9 x 13		3.9 x 13
	3.9 x 16		3.9 x 16
	3.9 x 19		3.9 x 38
	4.2 x 16		4.2 x 38
	4.2 x 25		

CORNER ELEMENTS



- Corner elements are used for connecting flange profiles to each other.
- By ensuring rigidity at the connection between flanges, they reduce influences of duct vibration to minimum level.
- Corner elements are galvanize plated.


TECHNICAL PROPERTIES

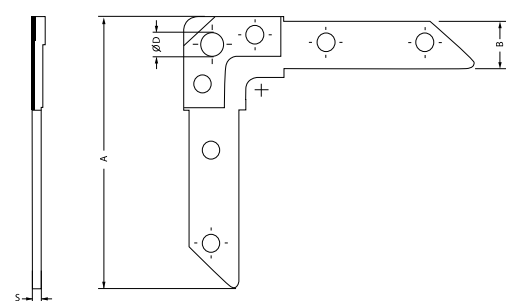

SIZE (mm)	A (mm)	B (mm)	Ø D (mm)	s (mm)
25	81	20	9	2,5
35	110	30	13	3

G CLAMPS

PRATI® A trademark of AFS

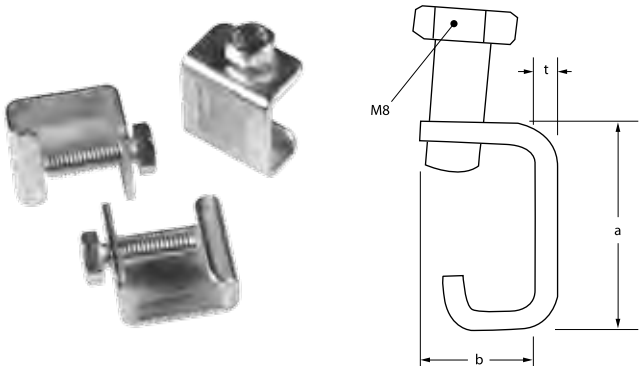

- G Clamps are designed to fix ready duct flange profiles to each other.
- By ensuring rigidity at the connection between flanges, they reduce influences of duct vibration to minimum level.
- G Clamps are galvanize plated.

TECHNICAL PROPERTIES

a (mm)	b (mm)	t (mm)
31	17	2.5

BEAM CLAMPS



TYPES:


AFS BC8

AFS BC10

- Beam clamps are mounted to tie beams without any welding and/or drilling.

TECHNICAL PROPERTIES

	AFS BC8	AFS BC10
A (mm)	21	29
B (mm)	19	21
C (mm)	35	45
D (mm)	M8 Ø9	M8 Ø9
E (mm)	35	41
F (mm)	M8	M10
G (mm)	18	23
H (mm)	38	50
Approximate Weight (g)	81	147
Safe Working Load (N)	1200	2500
Certificate	VdS, UL	VdS, UL

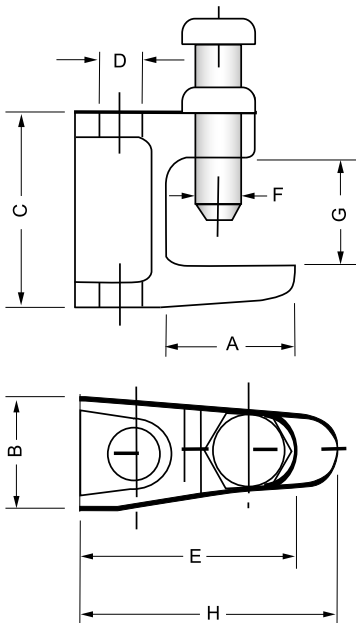

EXTENSION NUT



- Connects threaded components to each other.
- Galvanize plated against corrosion.

TECHNICAL PROPERTIES

Thread Size (mm)
M6
M8
M10
M12

BOLT & NUT



- Galvanize plated against corrosion.

TECHNICAL PROPERTIES

Thread Size (mm)	Bolt Length (mm)
M6	25
M8	25
M10	25
M12	25

HANGING ELEMENTS



- Hanging Elements are particularly designed for hanging air ducts.
- They are applied together with hanging rods.
- Rubber vibration absorbers prevent transfer of vibration on air ducts.

	Z Large	Z Middle	L Large	L Middle
Thickness (mm)	2.5	2.5	2.5	2.5
Hole Size (mm)	4	4	4	4
Slot (mm x mm)	20 x 8.5	12 x 8.5	20 x 8.5	12 x 8.5
Length (mm)	104	62	137	98

HANGING ROD



- Hanging Rod acts as a connector in hanging of air ducts systems.
- Galvanize plated against corrosion.
- Grade: 4.8

TECHNICAL PROPERTIES

Thread Size (mm)	Length (m)
M6	1 & 2
M8	1 & 2
M10	1 & 2
M12	1 & 2

STEEL ANCHORS



- Provides quick montage on concrete.
- Galvanize plated against corrosion.

AVAILABLE SIZES
M6 / M8 / M10 / M12

GASKET TAPE



- Duct gasket tapes are designed to ensure airtightness between the ducts connected to each other. Besides airtightness, it ensures tightness against water, dust, smoke, noise, oil, etc.

TECHNICAL PROPERTIES

Standard Sizes
thickness (mm) x width (mm)
5 x 15
5 x 25

MASTIC & SILICONE



- Mastic is used to ensure airtightness of air ducts.

MASTIC

- Acrylic Sealant which is reinforced with silicone oil
- Outstanding adhesion
- Paintable after cured
- UV resistant
- Grey / White in color
- High elasticity

SILICONE

- Antibacterial
- One part, acetic acid curing sealant
- Elongation at break: 550%
- Tack free time: approximately 10-20 min.
- Application temperature: +5 °C to +40 °C

DAMPER QUADRANT



TYPES:

MDQ-250 (up to 250 mm)

MDQ-500 (up to 500 mm)

MDQ-700 (up to 700 mm)

PDQ-250 (plastic & up to 220 mm)



MDQ-250

- For dampers up to 250 mm diameter

Set includes :

- Dial parts with handle
- Wing nut washer & bolt
- 1/4" spring loaded end spindle
- 1/4" square spindle



MDQ-500

- For dampers up to 500 mm diameter

Set includes :

- Dial parts with handle
- Wing nut washer & bolt
- 3/8" spring loaded end spindle
- 3/8" square spindle



PDQ-250

- Plastic damper quadrant
- For dampers up to 220 mm
- Nylon body
- Plastic end spindle



MDQ-700

- For dampers up to 700 mm diameter

Set includes :

- Quadrant
- Handle
- Wing nut washer & bolt
- 1/2" spring loaded end spindle
- 1/2" square spindle



ENERGY & HEAT RECOVERY UNITS





VANTILA RECOPUS

Energy Recovery Unit

VANTILA RECOPUS Energy Recovery Unit is specially designed and developed to enhance indoor air-quality by maintaining fresh air with minimum energy consumption.

It absorbs the latent thermal energy of exhausted air to condition the incoming fresh air. The energy and the moisture of exhausted air is transferred to the fresh air with the unique features of cellulosic energy recovery exchanger.

It is an ideal solution for offices, hotel rooms, classrooms, cafeterias, dormitories, exhibition centers etc. to provide fresh air and exhaust stale air.

PROPERTIES

- Provides fresh air and enhances indoor air quality
 - Exhausts stale air
 - Conditions the fresh air by transferring the heat of exhausted air
 - Brings in filtered fresh air
 - By-pass function provides free cooling during Spring & Fall
- During winter, it increases the moisture of indoor, by transferring the moisture of the exhausted air to the fresh air.
 - During summer, it decreases the moisture of indoor, by transferring the moisture of the fresh air to the exhausted air

ADVANTAGES


- Up to 80 % thermal efficiency
 - Minimized energy consumption
 - Energy transfer
 - Moisture transfer
 - Low noise level
 - Optimum ventilation
 - Automatic free cooling
- Compact and slim design
 - Easy access & maintenance of all components



VANTILA RECOPUS and RECO secure high efficiency with its innovative design and smart components.

CASING PROPERTIES

- 0,80 mm plain and matt galvanized steel sheet
 - Min.. 200 gr/m² galvanized coating
 - 10 mm thick thermal and acoustic insulation
 - Airtight between fresh and exhaust airflows
 - Filter service hatch
 - Exchanger service hatch
 - Terminal box
- Condensation drain tray and condensation drain Pipe
 - Low noise level
 - Device assembly support brackets
 - Round coupling flange
 - Patented design

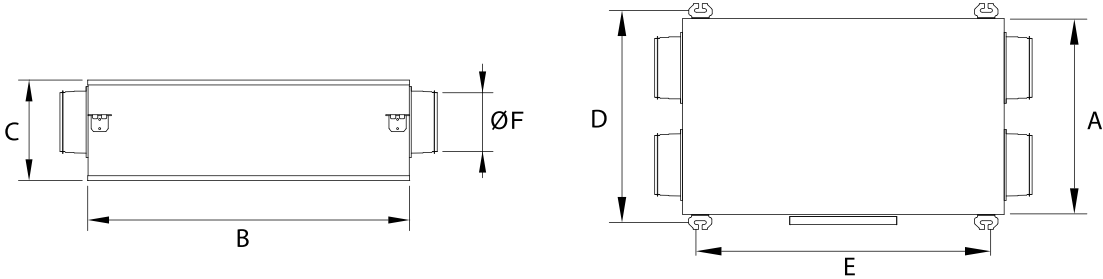

DIMENSIONS	A	B	C	D	E	Ø F
RECOPUS 650	665	1130	330	610	1180	200
RECOPUS 1000	925	1130	330	865	1180	250
RECOPUS 1500	1175	1150	330	1115	1200	250
RECOPUS 2000	1125	1650	440	1175	1565	300
RECOPUS 2500	1425	1650	440	1475	1565	355



Components of RECOPLUS Energy Recovery Unit

Superplus Electronic Control System

The Superplus Electronic Control System is a standard component of **RECOPLUS** Energy Recovery Unit.

- Building automation system connection (BMS)
- Compatibility with ModBUS communication protocol
- Pro rata airflow control with in-door air quality sensors. Acoustic Performance
- Free cooling automation
- Ability to operate fans independently and at different speeds
- Automatic electric heater control
- Weekly scheduler
- Room & Device control panel
- Seasonal selection (Summer, Winter)
- Filter pollution alarm

Plug Fans [Exhaust Fan, Fresh Air Fan]

40.000 hours non-stop mechanical operating life compared to other fans **40% energy provident**. Plug Fans are standard component* of **VANTILA RECOPLUS** Energy Recovery Unit. Besides its other advantages, Plug Fan pressurizes the air inside its cell and allows air to flow uniformed to the exchanger.

- Built in fan, Single Phase
- Compact Design
- High Efficiency
- Acoustic Performance
- Low Power Consumption
- High Static Pressure
- Overcurrent Fuse

Filter

Fresh air filter and exhaust filter are standard components of **RECOPLUS** Energy Recovery Unit. Filters keep out all unwanted substances like dust, soil, particles etc. Thus protects the exchanger and enhances indoor air quality.

- EN779 Consistent G3 Class
- Easy to Clean
- Easy to maintain

Energy Recovery Exchanger

Cellulosic energy recovery exchanger is a standard component of **RECOPLUS** Energy Recovery Unit.

- Cellulosic
- High temperature (sensible & latent) exchange efficiency
- Moisture transfer
- Low noise level (sound damping)
- Easy to maintain

Automatic By-Pass System & Free Cooling

Automatic By-Pass System is a standard component of **RECOPLUS** Energy Recovery Unit. The system exhausts the air directly to outside instead of through the energy exchanger, without any conditioning fresh air is supplied in a more efficient way. Free cooling is especially used when outside temperature is below inside temperature.

TECHNICAL PROPERTIES

RECOPLUS		650	1000	1500	2000	2500
Air Flow*	m³/h	640	1060	1480	2050	2550
Voltage	V/50Hz	230 1~				
Power Absorbed	W	210	265	530	600	630
Current	A	0,95	1,2	2,3	2,6	2,7
Filter Type	EN 779	G3				
Sound Level **	dB(A)	33	36	41	45	49
Weight	kg	50	84	102	118	122

* Air Flow values "0" Pa.

** Sound levels are measured 1.5 m below the Unit at max speed.

REZIST DUCT TYPE ELECTRIC HEATER

Duct Type practical heat sources are optional and used in cold climates to prevent Energy & Heat Recovery Units from freezing.

In addition to that it is utilized where high temperatures are required. In this case, heaters should be fixed to heat recovery unit's fresh air supply duct.

- Circular or rectangular shapes
- Galvanized steel casing
- Painted or Stainless steel casing
- Stainless steel resistance
- Max. 3 levels.
- Two circuit cutting thermostats.
 - One automatic reset circuit
 - One manual reset circuit.



Technical Properties Of Rezist

DIMENSIONS	REZIST 650	REZIST 1000	REZIST 1500	REZIST 2000	REZIST 2500	REZIST 3000	REZIST 3500	REZIST 5000
POWER Kw	2	3	3	5	7	8	10	13
AIR FLOW m³/h	650	1000	1400	1950	2450	3100	3650	5100
Ø DIAMETER	200	250	250	300	300	355	355	400
VOLTAGE V.	380/50 Hz							
LEVEL QTY.	1	1	1	2	2	2	3	3



VANTILA RECO

Heat Recovery Unit

VANTILA RECO Heat Recovery Unit is our another innovative solution to maintain the fresh air for indoor environments with minimum energy consumption.

It uses the heat of exhausted air to condition the incoming fresh air. The heat of exhausted air is transferred to the fresh air with the diagonal flow aluminum heat recovery exchanger.

It is an ideal solution for offices, hotel rooms, classrooms, cafeterias, dormitories, exhibition centers etc. to provide fresh air and exhaust stale air.

PROPERTIES

- Provides fresh air and enhances indoor air quality
- Exhausts stale air
- Brings in filtered fresh air
- Conditions the fresh air by transferring the heat of exhausted air

ADVANTAGES


- High thermal efficiency
- Minimized energy consumption
- Low noise level
- Compact and slim design
- Easy access & maintenance of all components

CASING PROPERTIES

- 0,80 mm plain and matt galvanized steel sheet
- Min.. 200 gr/m² galvanized coating
- 10 mm thick thermal and acoustic insulation
- Airtight between fresh and exhaust airflows
- Filter service hatch
- Exchanger service hatch
- Low noise level
- Condensation drain tray and condensation drain pipe
- Terminal box
- Device assembly support brackets
- Round coupling flange
- Patented design

“ **RECO**ver the environment ”

Some things are priceless, **VANTILA** recovery units drastically upgrade the quality of your indoor environment and every fresh breath helps you have a better life.

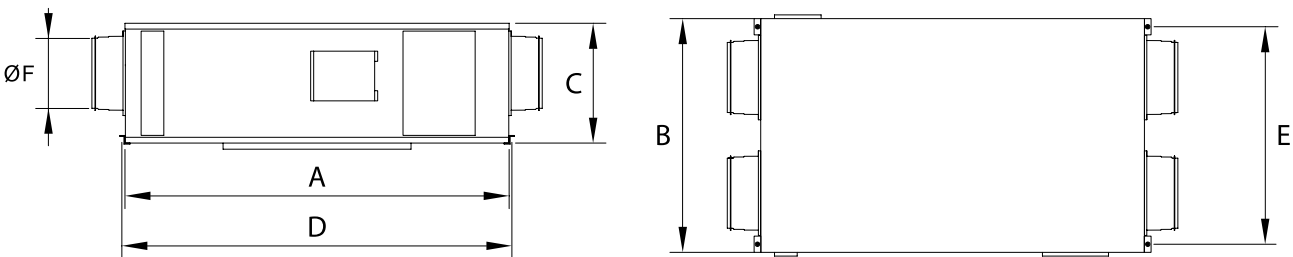

DIMENSIONS	A	B	C	D	E	Ø F
RECO 650	930	675	335	968	585	200
RECO 1000	930	675	335	968	585	250
RECO 1500	1072	826	375	1112	745	250
RECO 2000	1192	980	430	1232	895	300
RECO 2500	1335	1120	430	1375	1035	355
RECO 3000	1570	1160	540	1610	1052	355
RECO 3500	1570	1160	540	1610	1052	355
RECO 5000	1805	1240	640	2040	1300	450



Components of RECO Heat Recovery Unit

PLUG FANS [Exhaust Fan, Fresh Air Fan]

40.000 hours non-stop mechanical operating life compared to other fans **40% energy provident**. Plug Fans are standard component* of **VANTILA RECO** Heat Recovery Unit. Besides its other advantages, Plug Fan pressurizes the air inside its cell and allows air to flow uniformed to the exchanger.

*RECO 5000 Heat Recovery Unit comes with radial fans.

- Built in fan, Single Phase
- Compact Design
- High Efficiency
- Acoustic Performance
- Low Power Consumption
- High Static Pressure
- Overcurrent Fuse

Heat Recovery Exchanger

Diagonal flow aluminum heat recovery exchanger is a standard component of **RECO** Heat Recovery Unit.

- Eurovent Certified
- Aluminum
- High heat transfer
- Washable
- Easy to maintain

Filter

Fresh air filter and exhaust filter are standard components of **RECO** Heat Recovery Unit. Filters keep out all unwanted substances like dust, soil, particles etc. Thus protects the exchanger and enhances indoor air quality.

- EN779 Consistent G3 Class
- Easy to Clean
- Easy to maintain

Speed Controller*

Speed controller is a standard component of **RECO** Heat Recovery Unit.

- Air Flow control (adjustable)
- On / Off

Drainage Pipe

Accumulated condensation inside the drain tray emptied by drainage pipe.

Superplus Electronic Control System*

The Superplus Electronic Control System is an optional component of **RECO** Heat Recovery Unit.

- Building automation system connection (BMS)
- Compatibility with ModBUS communication protocol
- Pro rata airflow control with in-door air quality sensors. Acoustic Performance
- Free cooling automation
- Ability to operate fans independently and at different speeds
- Automatic electric heater control
- Weekly scheduler
- Room & Device control panel
- Seasonal selection (Summer, Winter)
- Filter pollution alarm

* Superplus Electronic Control System substitutes Speed Controller.

TECHNICAL PROPERTIES

RECO		650	1000	1500	2000	2500	3000	3500	5000
Air Flow*	m³/h	780	930	1440	1800	2440	2780	3500	4650
Voltage	V/50Hz	230 1~							
Power Absorbed	W	204	310	450	450	1030	1030	940	1360
Current	A	0,95	1,2	2,3	2,6	2,7	3,9	4,1	6,3
Filter Type	EN 779	G3							
Sound Level **	dB(A)	45	46	46	48	49	50	49	50
Weight	kg	43	43	59	80	99	120	125	155

* Air Flow values "0" Pa.

** Sound levels are measured 1.5 m below the Unit at max speed.

REZIST DUCT TYPE ELECTRIC HEATER

Duct Type practical heat sources are optional and used in cold climates to prevent Energy & Heat Recovery Units from freezing.

In addition to that it is utilized where high temperatures are required. In this case, heaters should be fixed to heat recovery unit's fresh air supply duct.

- Circular or rectangular shapes
- Galvanized steel casing
- Painted or Stainless steel casing
- Stainless steel resistance
- Max. 3 levels.
- Two circuit cutting thermostats.
 - One automatic reset circuit
 - One manual reset circuit.



Technical Properties Of Rezist


DIMENSIONS	REZIST 650	REZIST 1000	REZIST 1500	REZIST 2000	REZIST 2500	REZIST 3000	REZIST 3500	REZIST 5000
POWER Kw	2	3	3	5	7	8	10	13
AIR FLOW m³/h	650	1000	1400	1950	2450	3100	3650	5100
Ø DIAMETER	200	250	250	300	300	355	355	400
VOLTAGE V.	380/50 Hz.							
LEVEL QTY.	1	1	1	2	2	2	3	3



TECHNICAL DETAILS




STANDARD FLEXIBLE
AIR DUCT DIMENSIONS

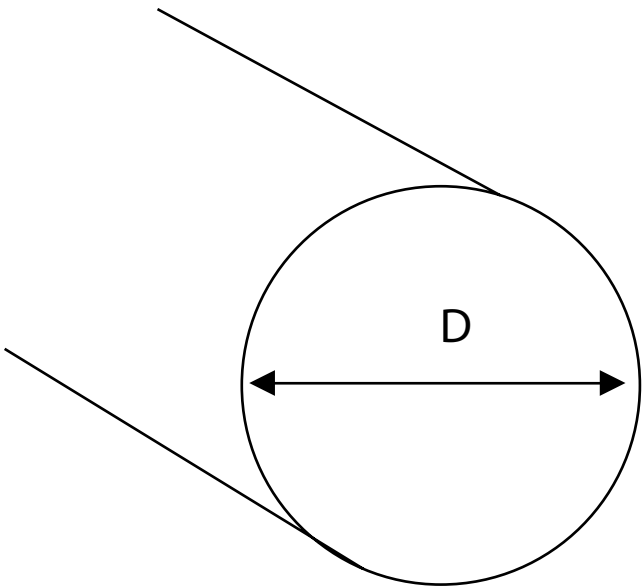

D (mm)	D (mm)
52	254
68	280
76	305
82	315
102	356
112	406
127	457
133	508
140	560
152	610
160	630
185	710
203	800
229	


STANDARD TPU INDUSTRIAL
HOSE DIMENSIONS

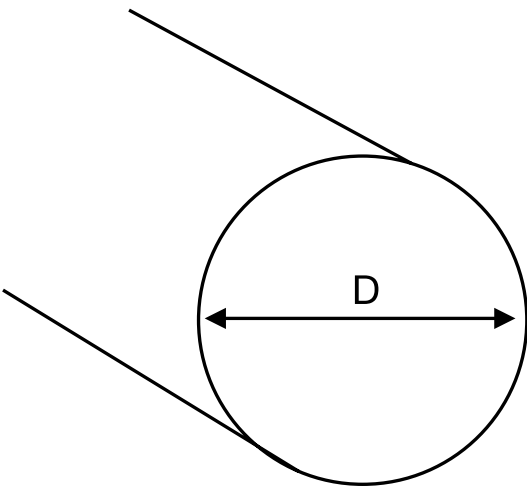

D (mm)
30
52
60
76
80
90
102
110
120
127
130
140
153
160
180
204
225
250
300



STANDARD RECTANGULAR FLEXIBLE AIR DUCT DIMENSIONS

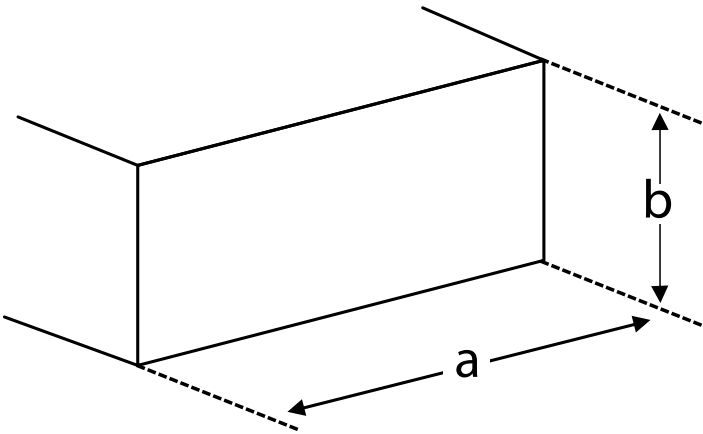

a x b (mm x mm)	a x b (mm x mm)	a x b (mm x mm)
60 x 100	180 x 310	280 x 600
60 x 140	180 x 380	280 x 710
60 x 180	180 x 460	280 x 830
80x 140	180 x 540	280 x 980
80 x 170	200 x 360	300 x 690
80 x 240	200 x 440	300 x 810
100 x 190	200 x 520	300 x 960
100 x 260	200 x 600	320 x 790
100 x 300	220 x 420	320 x 940
120 x 200	220 x 500	340 x 770
120 x 280	220 x 580	340 x 920
120 x 320	220 x 660	360 x 900
120 x 360	240 x 480	380 x 880
140 x 260	240 x 560	400 x 860
140 x 300	240 x 640	420 x 840
140 x 350	240 x 750	440 x 820
140x 420	260 x 540	460 x 800
160 x 280	260 x 620	480 x 780
160 x 330	260 x 730	500 x 760
160 x 400	260 x 850	520 x 740
160 x 480		

* Other dimension are available upon request

CIRCULAR EQUIVALENTS of RECTANGULAR DUCTS

The circular equivalent (De) of a rectangular duct for equal friction and capacity is calculated using the following formula:

$$D_e = \frac{1.30(a \times b)^{0.625}}{(a + b)^{0.25}}$$
 (Heubscher equation)


where a, b : dimensions of two sides of rectangular duct

a x b (mm x mm)	De (mm)	a x b (mm x mm)	De (mm)	a x b (mm x mm)	De (mm)
60 x 100	84	180 x 310	256	280 x 600	440
60 x 140	98	180 x 380	281	280 x 710	475
60 x 180	110	180 x 460	306	280 x 830	509
80 x 140	115	180 x 540	329	280 x 980	547
80 x 170	125	200 x 360	290	300 x 690	487
80 x 240	146	200 x 440	318	300 x 810	523
100 x 190	149	200 x 520	343	300 x 960	564
100 x 260	171	200 x 600	365	320 x 790	536
100 x 300	183	220 x 420	328	320 x 940	579
120 x 200	168	220 x 500	355	340 x 770	548
120 x 280	196	220 x 580	380	340 x 920	593
120 x 320	208	220 x 660	402	360 x 900	607
120 x 360	219	240 x 480	366	380 x 880	619
140 x 260	206	240 x 560	392	400 x 860	630
140 x 300	220	240 x 640	416	420 x 840	640
140 x 350	236	240 x 750	446	440 x 820	649
140 x 420	256	260 x 540	403	460 x 800	657
160 x 280	229	260 x 620	429	480 x 780	664
160 x 330	247	260 x 730	461	500 x 760	670
160 x 400	270	260 x 850	493	520 x 740	675
160 x 480	292				

Use De for pressure loss calculations and diagram readings in rectangular flexible duct applications.


INSERTION LOSS DIAGRAMS

SONOAFS-ALU.F - Ø 102 mm

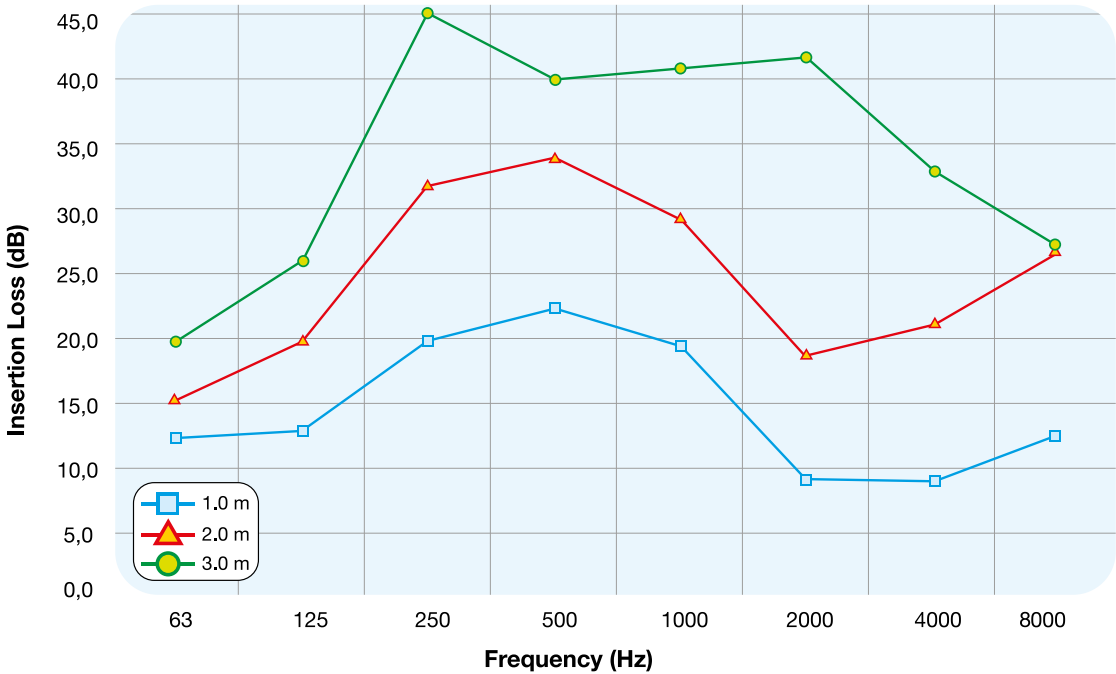


1/1 octave	1.0 m	12,6	12,8	19,8	22,5	19,6	9,3	9,1	13,2
	2.0 m	15,3	19,8	32,0	33,9	29,2	18,4	21,0	28,0
	3.0 m	19,8	26,5	45,0	40,0	40,9	42,0	33,2	28,4
		63	125	250	500	1000	2000	4000	8000

SONOAFS-ALU.F - Ø 160 mm

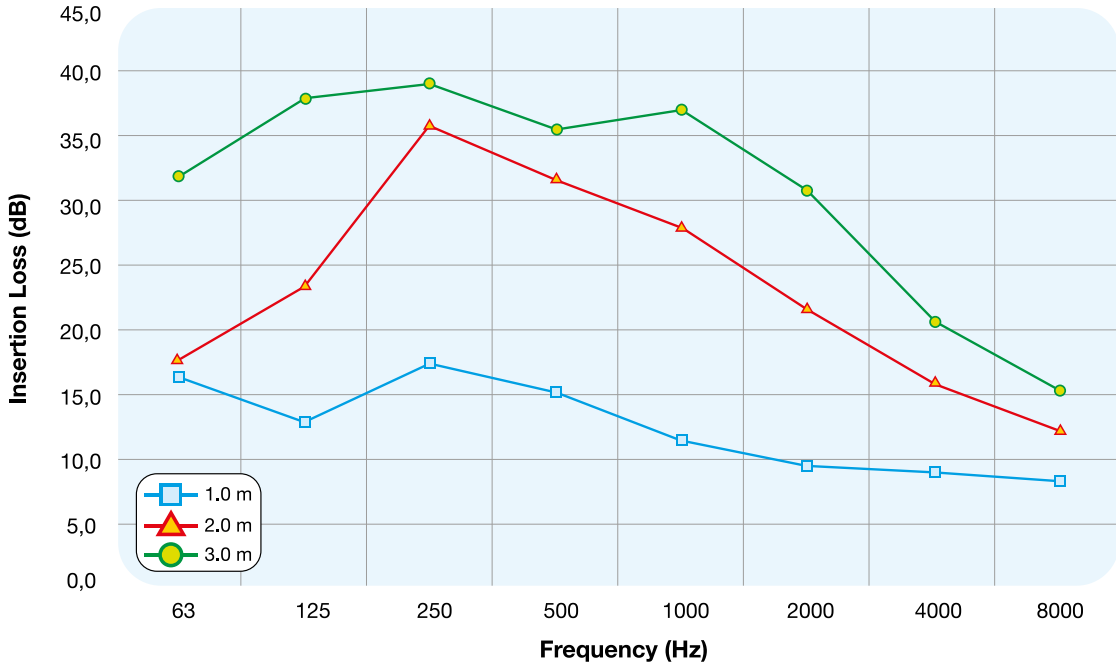


1/1 octave	1.0 m	16,5	12,9	17,4	15,3	11,7	9,4	8,8	7,0
	2.0 m	17,5	23,5	36,0	32,2	28,1	21,9	16,0	12,6
	3.0 m	31,9	38,2	38,9	35,7	37,1	31,0	21,0	15,4
		63	125	250	500	1000	2000	4000	8000

SONOAFS-ALU.F - Ø 127 mm

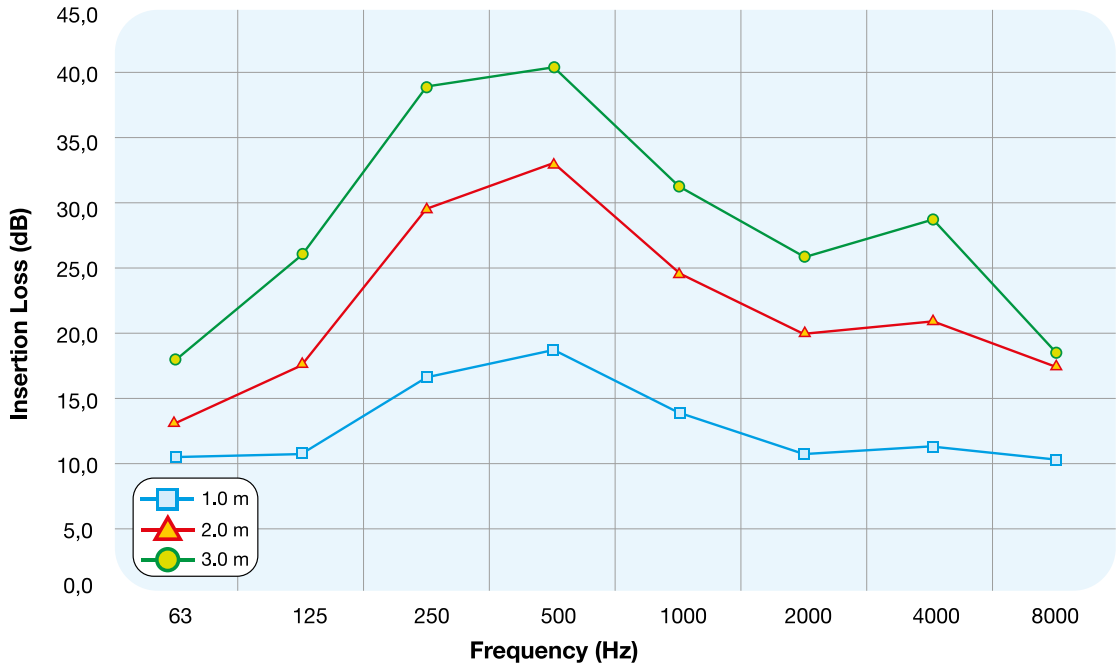

1/1 octave	1.0 m	10,4	10,6	16,5	18,7	13,9	10,9	11,7	10,4
	2.0 m	13,2	17,4	29,5	33,3	24,6	19,9	21,2	17,6
	3.0 m	18,3	26,1	38,9	40,5	31,7	26,0	27,3	18,6
		63	125	250	500	1000	2000	4000	8000


SONOAFS-ALU.F - Ø 203 mm

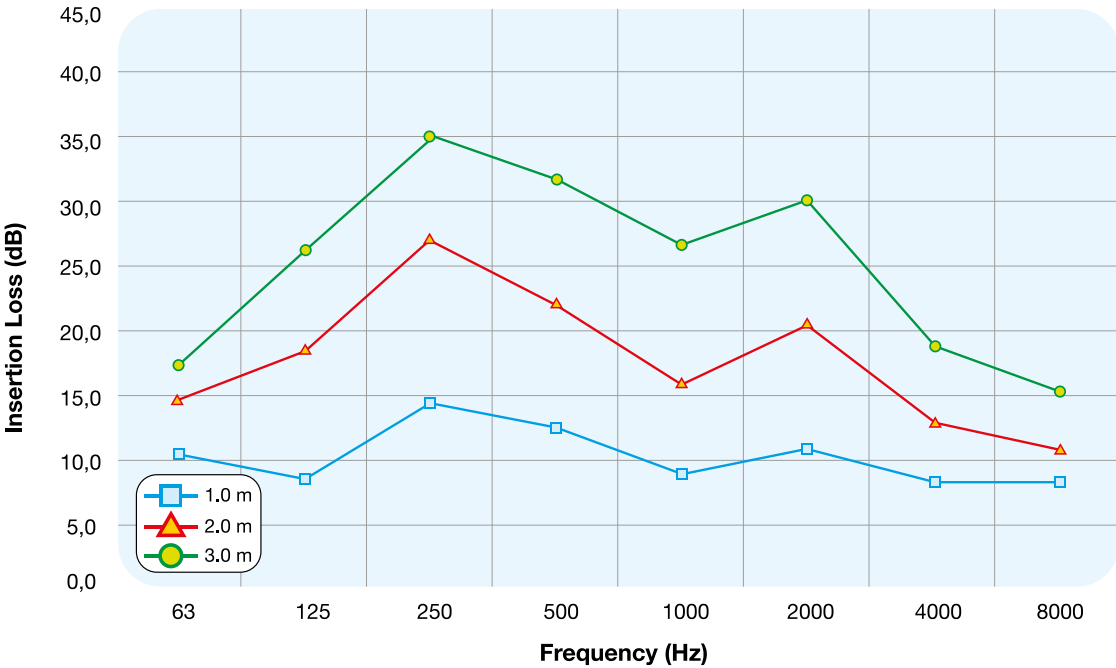

1/1 octave	1.0 m	10,8	8,9	14,0	12,4	9,1	11,5	8,4	8,3
	2.0 m	14,4	18,0	27,1	22,3	16,6	20,6	12,9	11,5
	3.0 m	17,3	26,4	35,1	32,2	26,6	30,0	18,6	15,5
		63	125	250	500	1000	2000	4000	8000


INSERTION LOSS DIAGRAMS

SONOAFS-ALU.F - Ø 254 mm

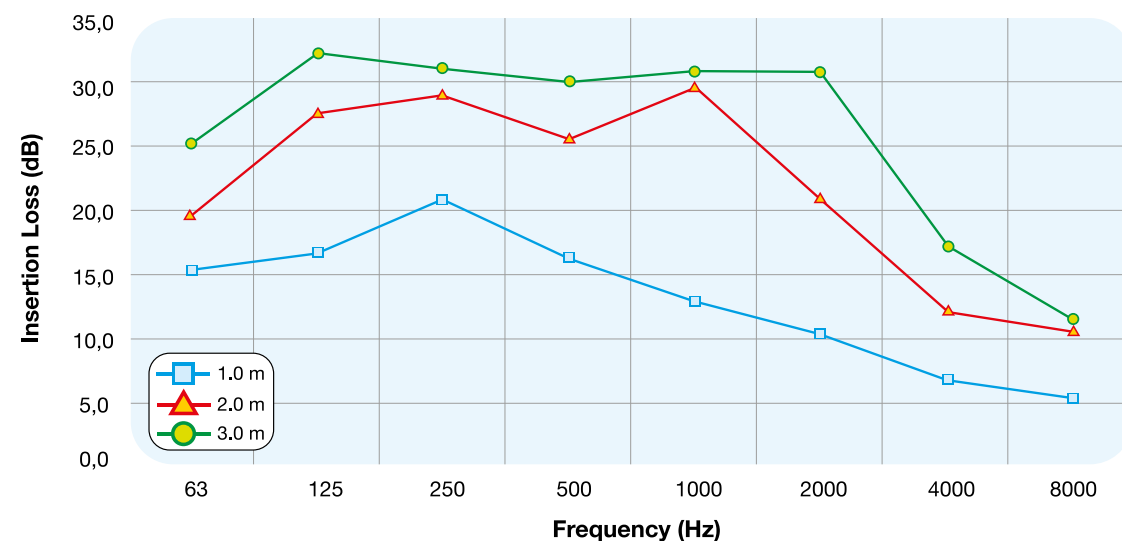


$\frac{1}{4}$ octave	1.0 m	15,8	16,9	21,0	16,4	13,5	10,5	6,9	5,5
	2.0 m	19,4	27,8	28,7	25,7	29,2	21,5	12,3	10,8
	3.0 m	25,1	32,6	31,5	30,1	31,3	31,2	17,2	11,7

SONOAFS-NW.P - Ø 127 mm

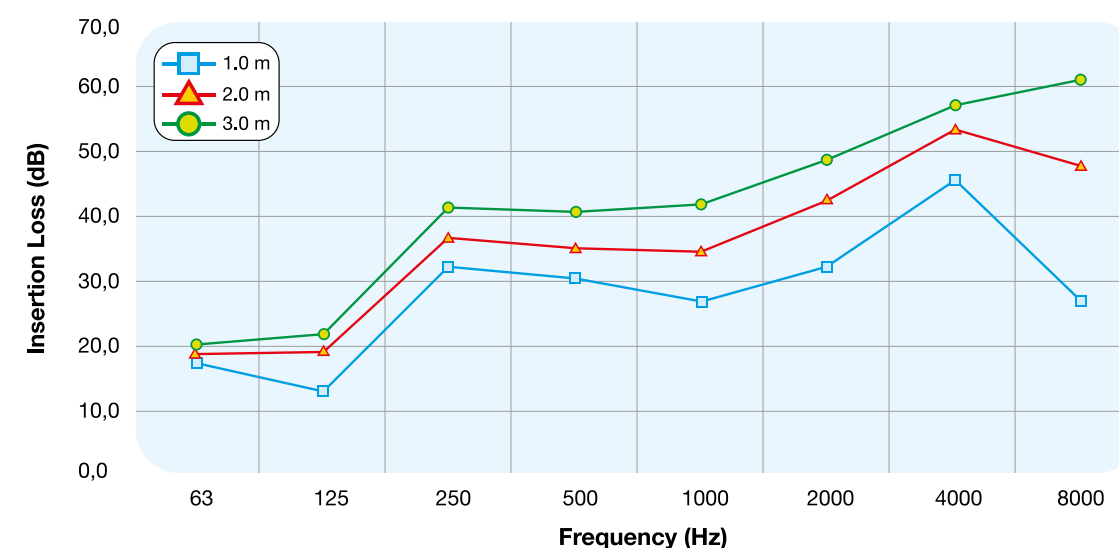


$\frac{1}{4}$ octave	1.0 m	17,3	13,3	32,3	30,4	27,7	33,3	45,8	27,0
	2.0 m	19,1	19,2	37,9	36,9	36,7	43,4	53,9	48,3
	3.0 m	20,2	22,7	41,2	40,7	41,9	49,3	58,7	60,8

SONOAFS-ALU.F - Ø 315 mm

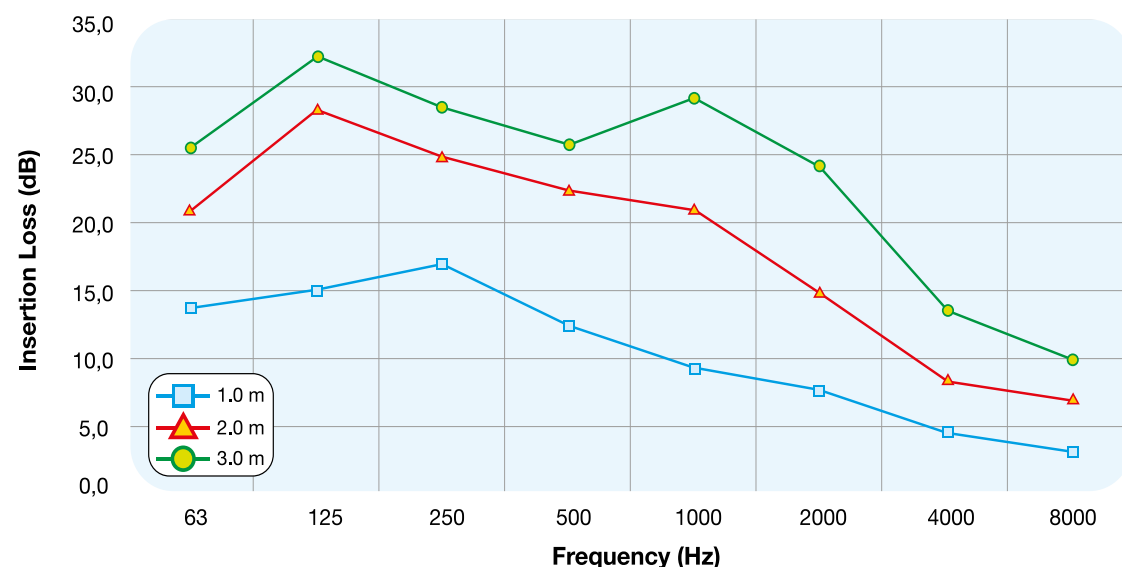

$\frac{1}{4}$ octave	1.0 m	13,8	15,2	17,1	12,7	9,3	7,8	4,6	3,6
	2.0 m	21,6	28,3	24,9	22,4	21,3	14,9	8,6	6,8
	3.0 m	25,7	32,6	27,8	26,4	28,6	24,0	13,1	9,9


SONOAFS-NW.P - Ø 160 mm

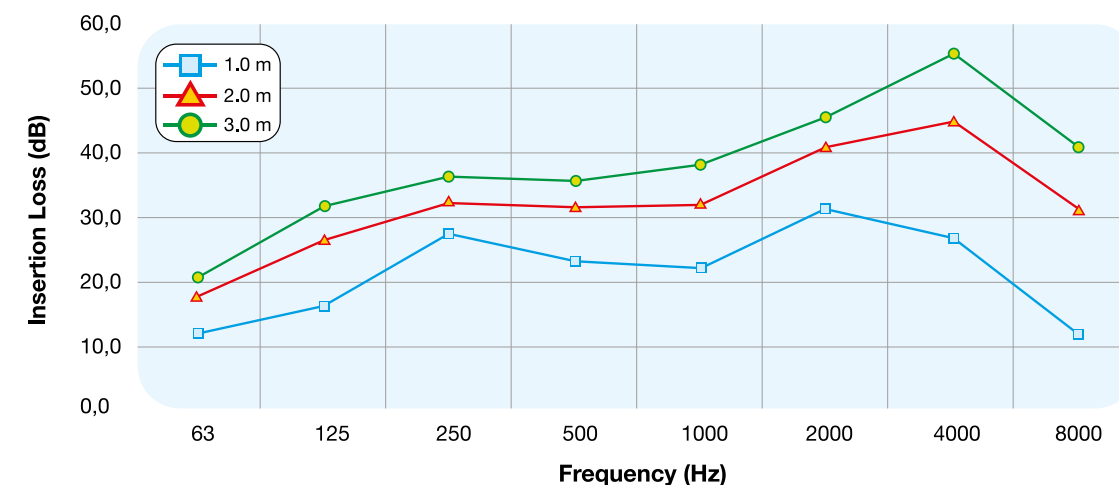


$\frac{1}{4}$ octave	1.0 m	12,1	16,3	28,6	24,0	23,1	31,0	27,5	16,4
	2.0 m	17,4	26,3	33,8	31,8	33,1	40,5	45,2	31,5
	3.0 m	20,5	32,1	36,8	36,4	38,9	46,0	55,6	40,4

INSERTION LOSS DIAGRAMS


SOUNDROPAFS.P - Ø 100 mm

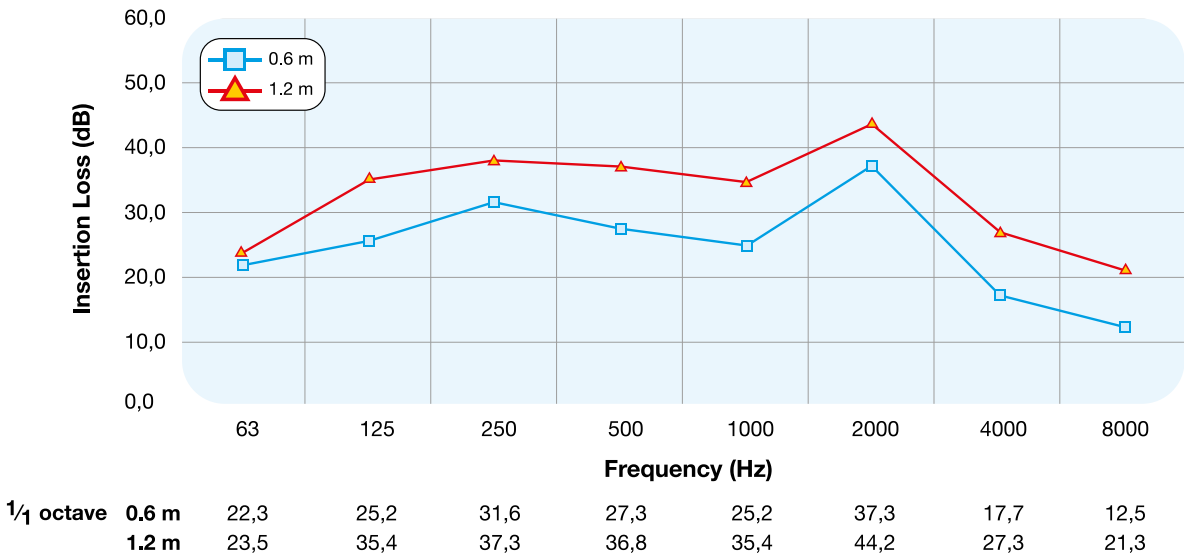


SOUNDROPAFS.P - Ø 160 mm - 0.6 m

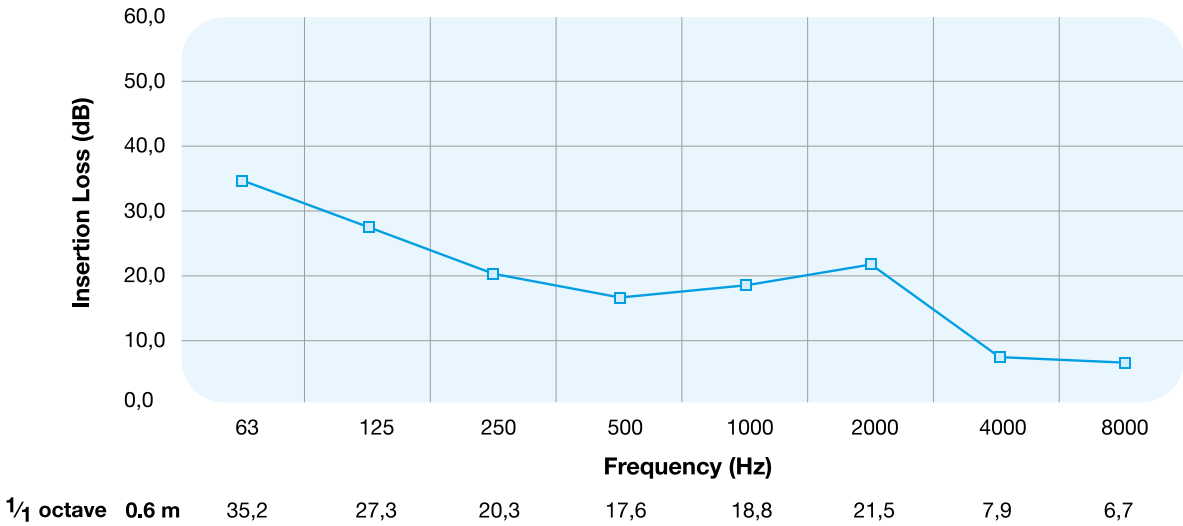

SOUNDROPAFS.P - Ø 125 mm

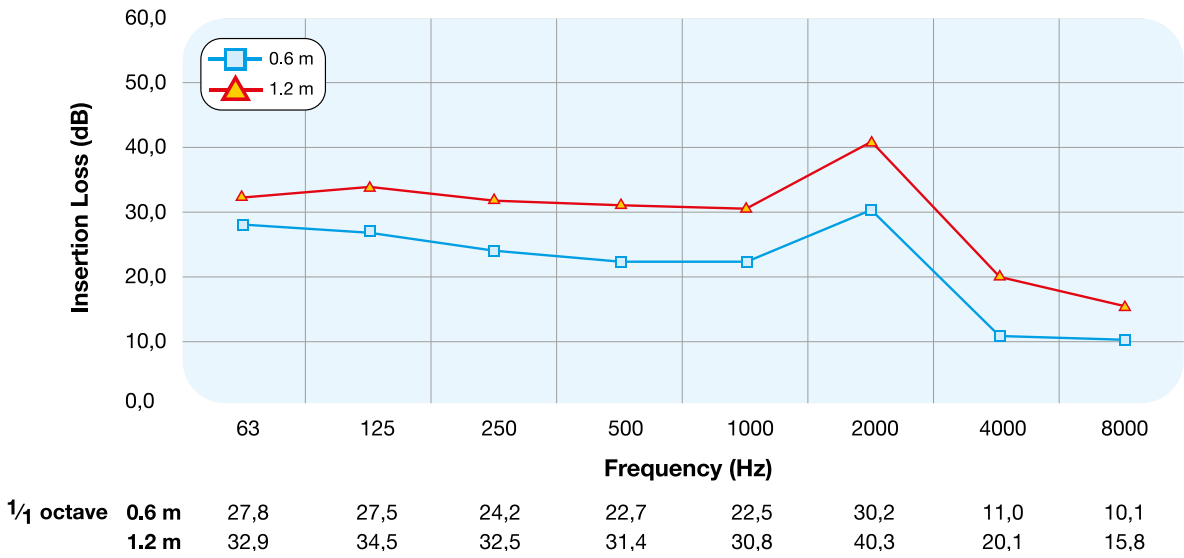


SOUNDROPAFS.P - Ø 160 mm - 1.2 m (50 mm Insulation)

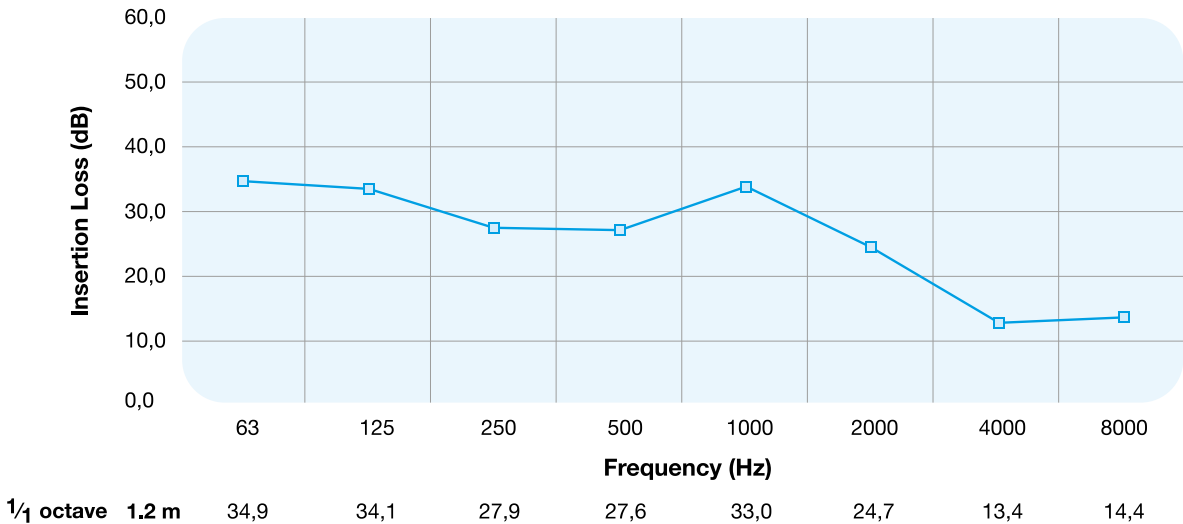


INSERTION LOSS DIAGRAMS

SOUNDROPAFS.P - Ø 200 - 0.6 m

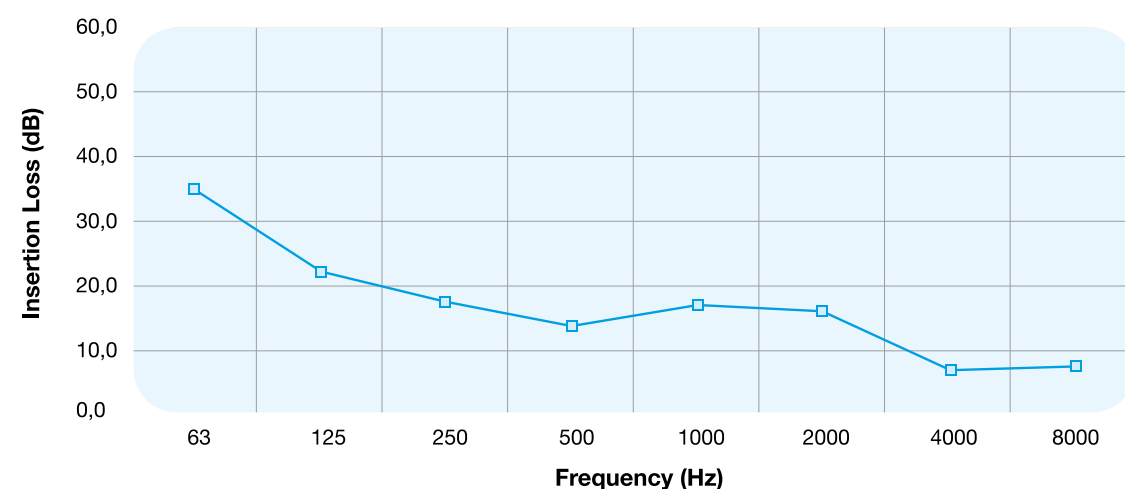


1/1 octave 0,6 m 35,5 22,5 18,3 14,3 16,4 15,5 7,1 7,2

SOUNDROPAFS-NW - Ø 127 mm - 1.0 m

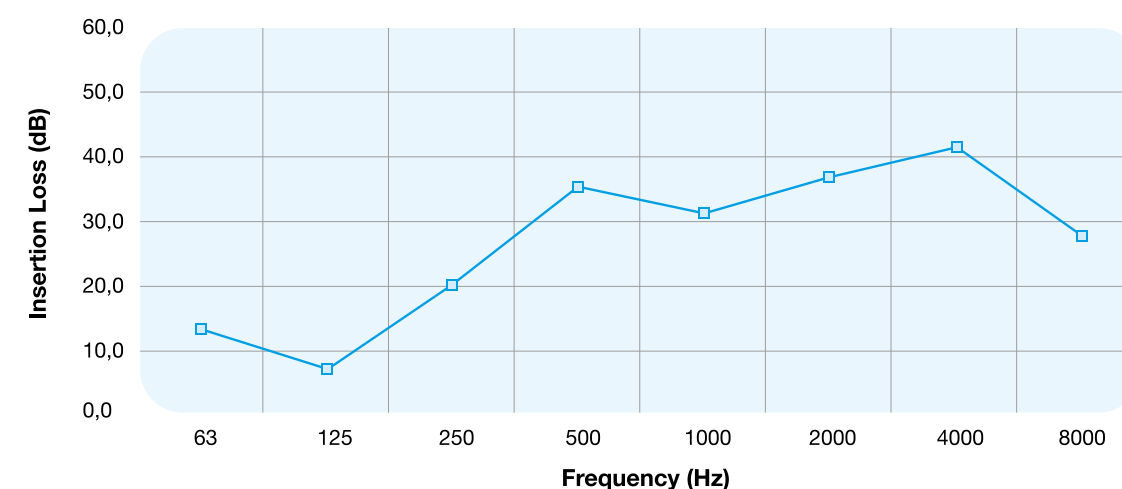

1/1 octave 1.0 m 13,5 7,3 19,8 35,5 30,9 36,0 41,6 27,7


SOUNDROPAFS.P - Ø 250 - 0.6 m

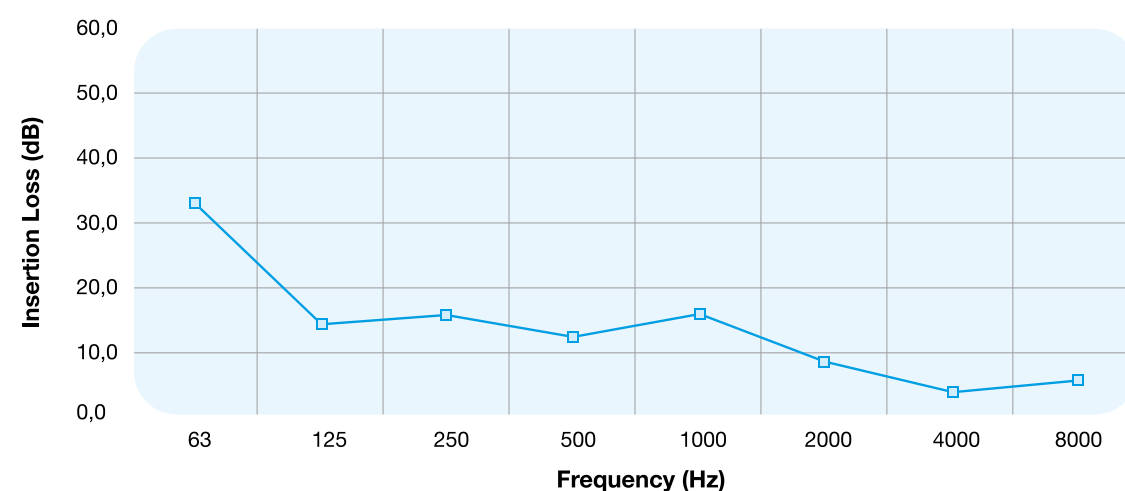


1/1 octave 0,6 m 33,0 15,2 15,7 13,0 16,0 9,6 4,1 5,1

TRANSMISSION LOSS DIAGRAMS


SONOAFS-ALU.F - Ø 102 mm

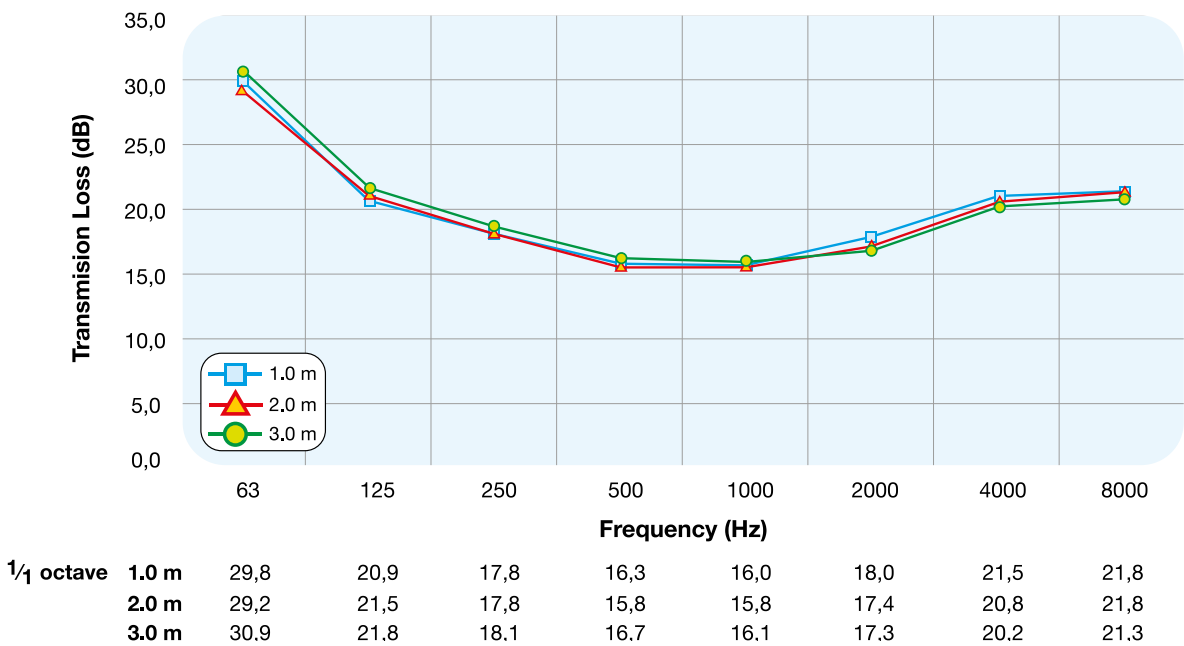


SONOAFS-ALU.F - Ø 160 mm

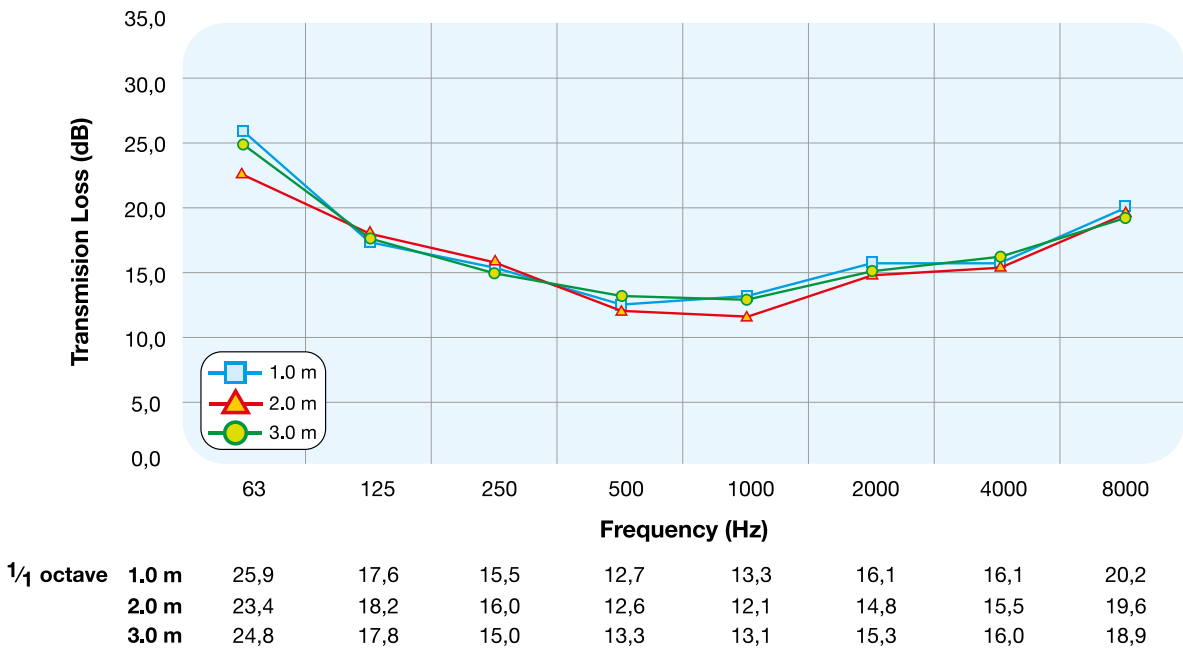

SONOAFS-ALU.F - Ø 127 mm

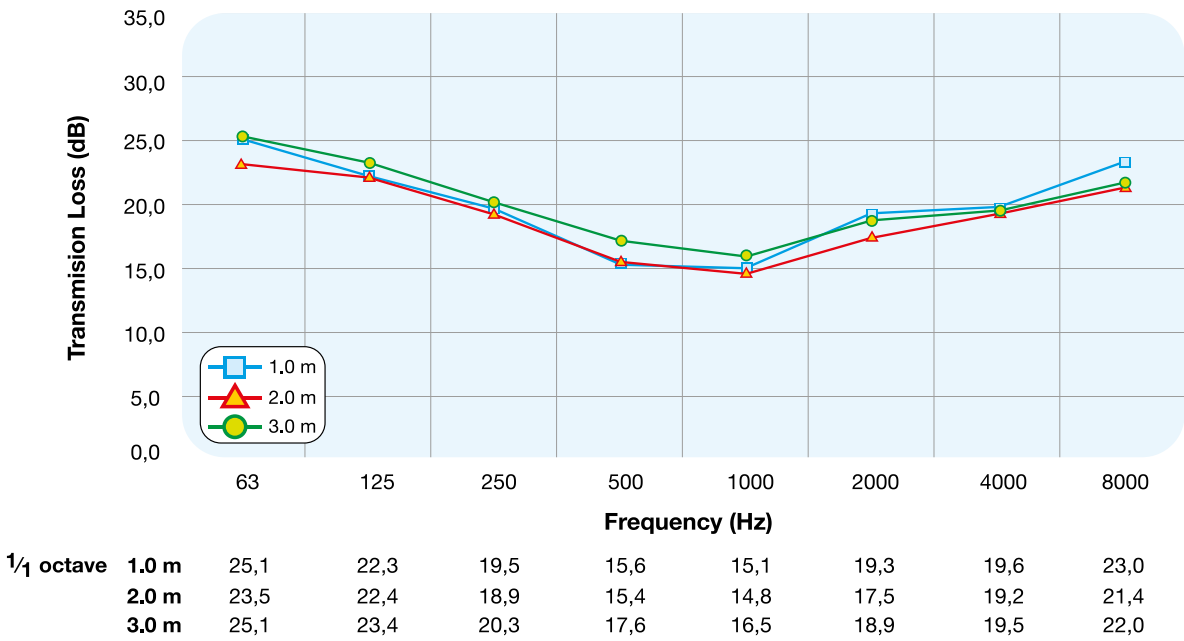


SONOAFS-ALU.F - Ø 203 mm

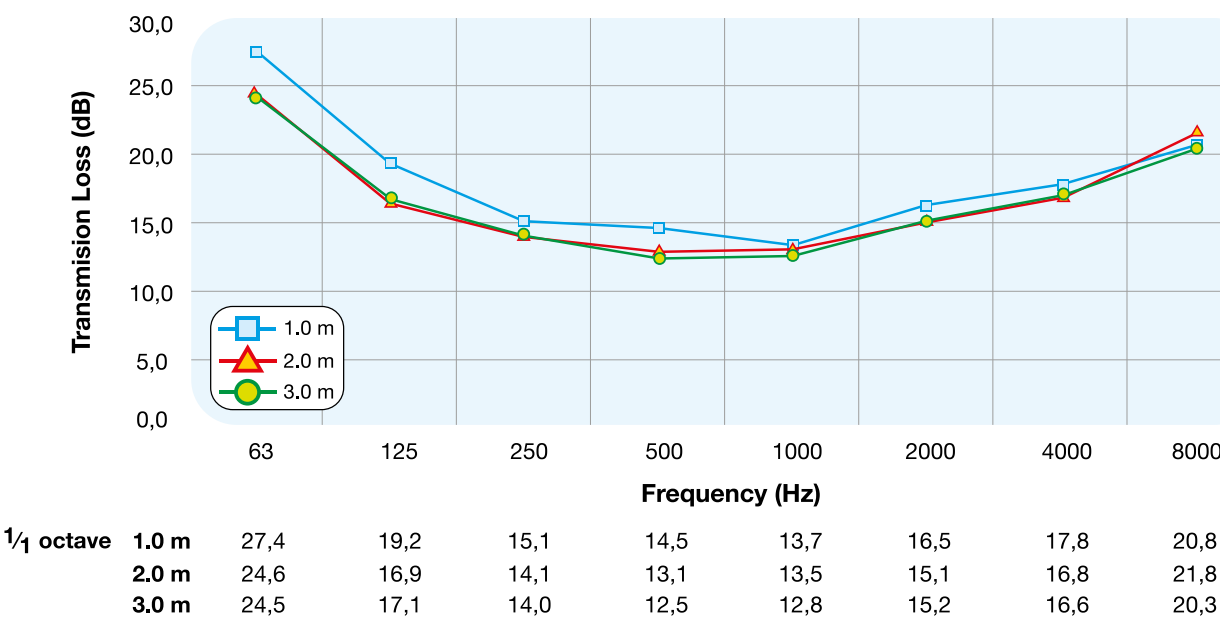


TRANSMISSION LOSS DIAGRAMS

SONOAFS-ALU.F - Ø 254 mm

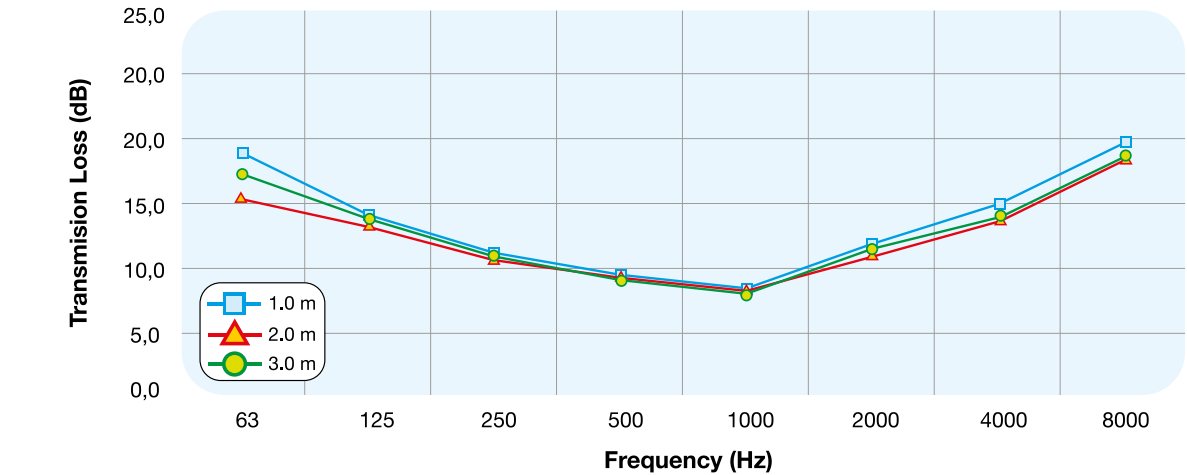


1/1 octave	1.0 m	17,9	14,0	11,0	9,6	9,0	12,1	15,1	19,4
	2.0 m	15,3	13,6	10,6	9,5	9,1	11,3	13,9	18,0
	3.0 m	16,8	14,0	11,2	9,3	8,7	11,8	14,0	18,1

SONOAFS-NW.P - Ø 127 mm

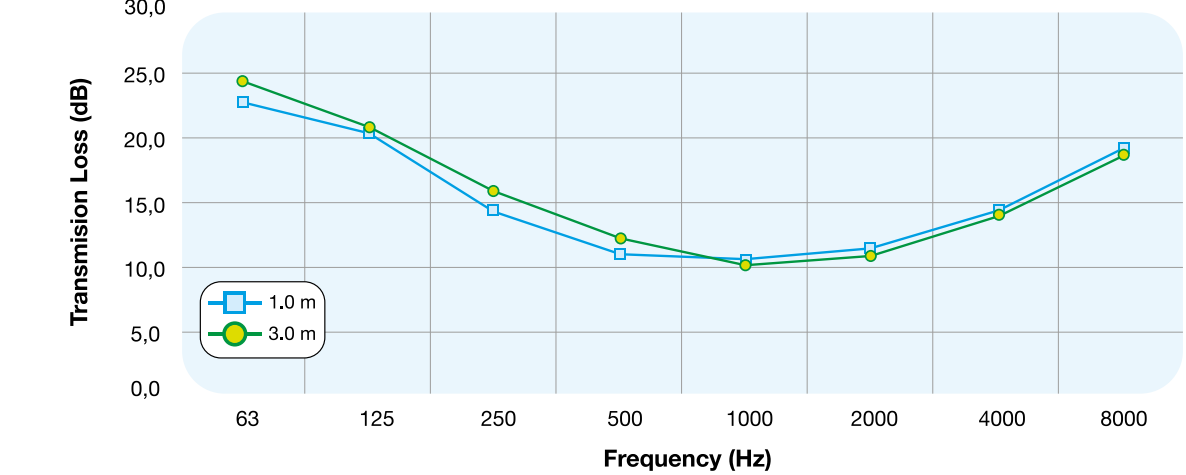


1/1 octave	1.0 m	22,8	20,4	14,6	11,3	10,8	11,7	14,2	18,8
	3.0 m	24,5	20,8	15,9	12,3	10,5	11,1	14,3	18,4

SONOAFS-ALU.F - Ø 315 mm

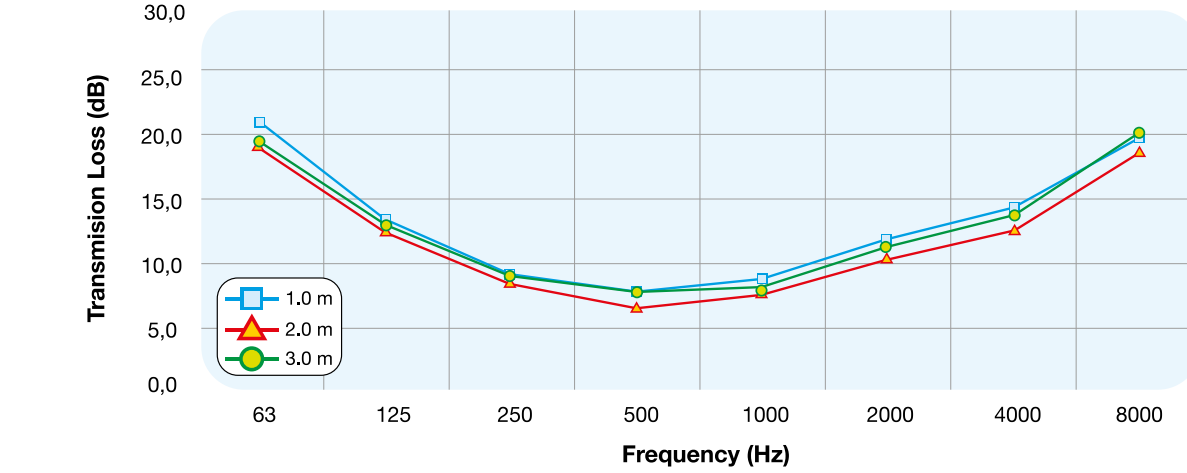

1/1 octave	1.0 m	21,4	13,4	9,1	7,8	8,4	12,0	14,2	19,8
	2.0 m	18,6	12,6	8,3	6,9	7,4	10,7	12,7	18,1
	3.0 m	19,7	13,0	9,0	7,8	8,4	11,7	13,8	20,1


SONOAFS-NW.P - Ø 160 mm

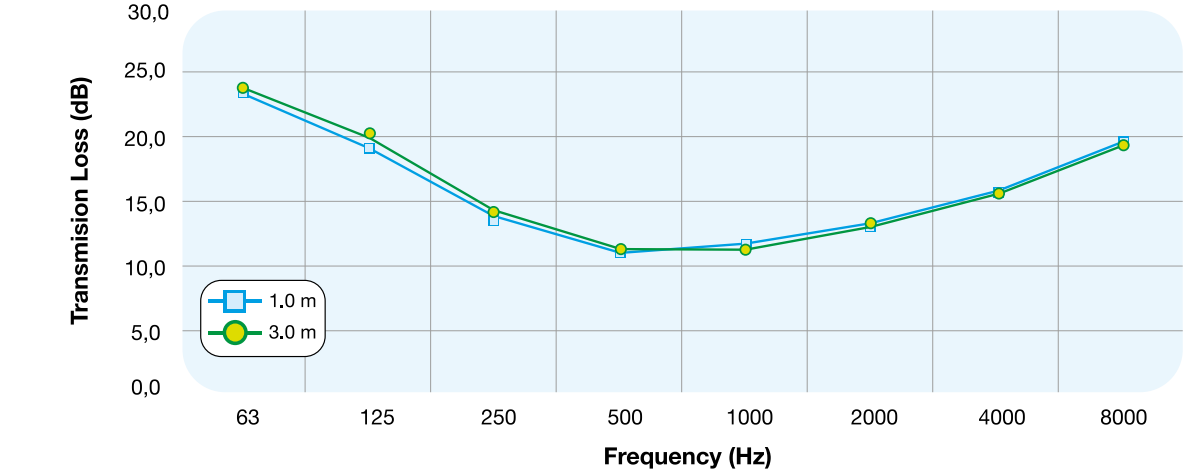

1/1 octave	1.0 m	23,0	19,3	13,6	11,6	11,8	12,6	15,4	19,8
	3.0 m	23,3	20,0	14,1	11,8	11,5	12,7	15,4	19,8


TRANSMISSION LOSS DIAGRAMS

SOUNDROPAFS.P - Ø 100 mm

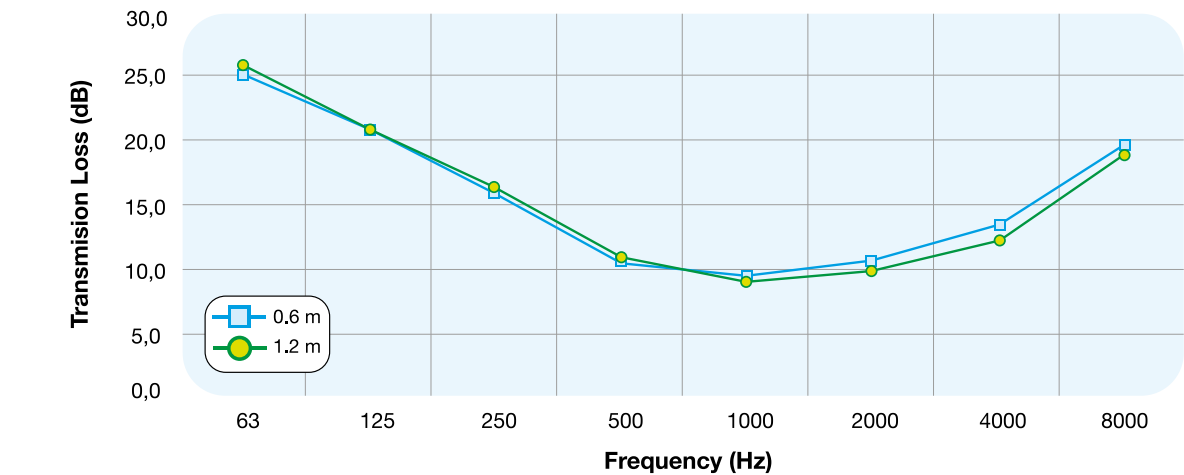


1/1 octave	1.0 m	25,1	20,8	16,0	11,4	9,7	10,8	13,6	19,4
	3.0 m	25,8	20,9	16,7	11,7	9,4	10,1	12,5	18,0

SOUNDROPAFS.P - Ø 160 mm - 0.6 m

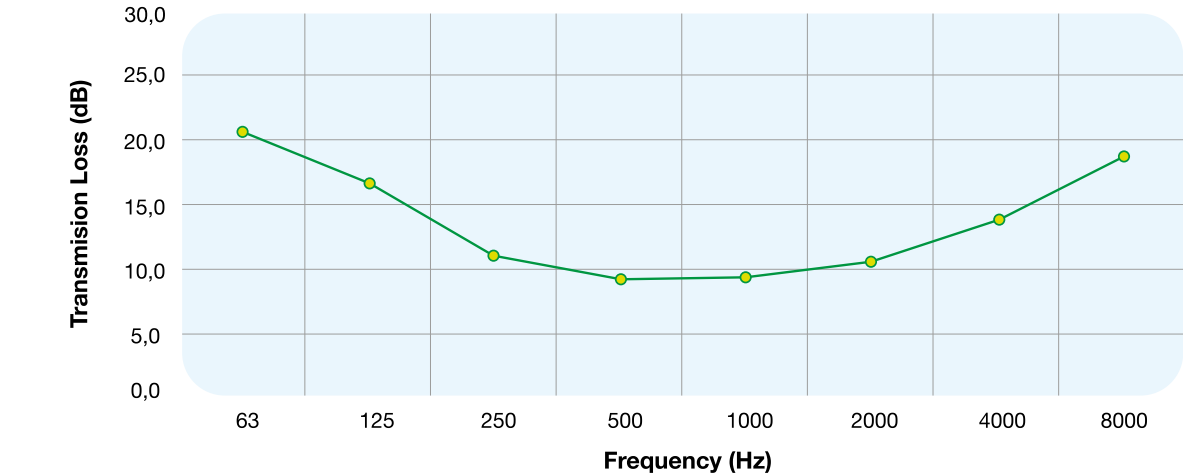


1/1 octave	0.6 m	21,5	16,7	11,5	9,1	9,5	10,7	13,7	18,5
------------	-------	------	------	------	-----	-----	------	------	------

SOUNDROPAFS.P - Ø 125 mm

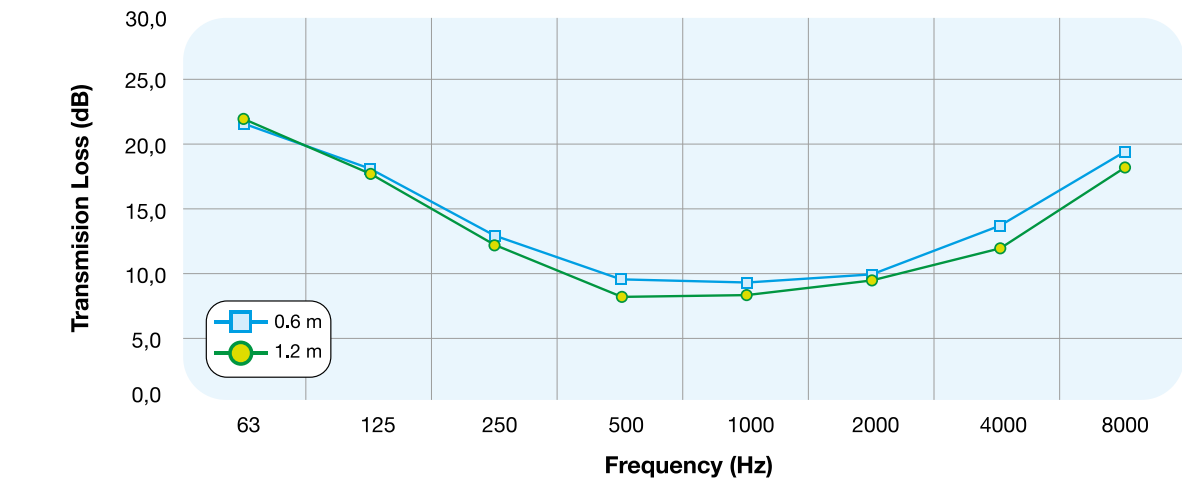

1/1 octave	1.0 m	21,8	17,3	12,7	9,7	9,3	9,9	13,5	19,2
	3.0 m	22,0	17,2	12,3	7,9	8,2	9,3	12,0	17,8


SOUNDROPAFS.P - Ø 160 mm - 1.2 m (50 mm Insulation)

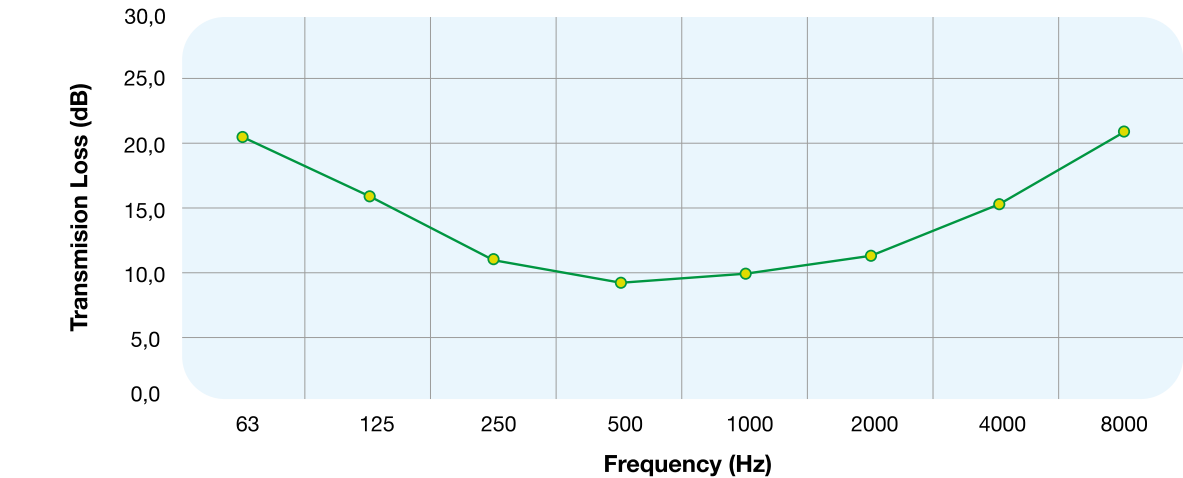


1/1 octave	1.2 m	21,3	16,3	11,2	9,5	9,9	11,6	15,1	20,9
------------	-------	------	------	------	-----	-----	------	------	------

TRANSMISSION LOSS DIAGRAMS


SOUNDROP AFS.P - Ø 200 mm - 0.6 m

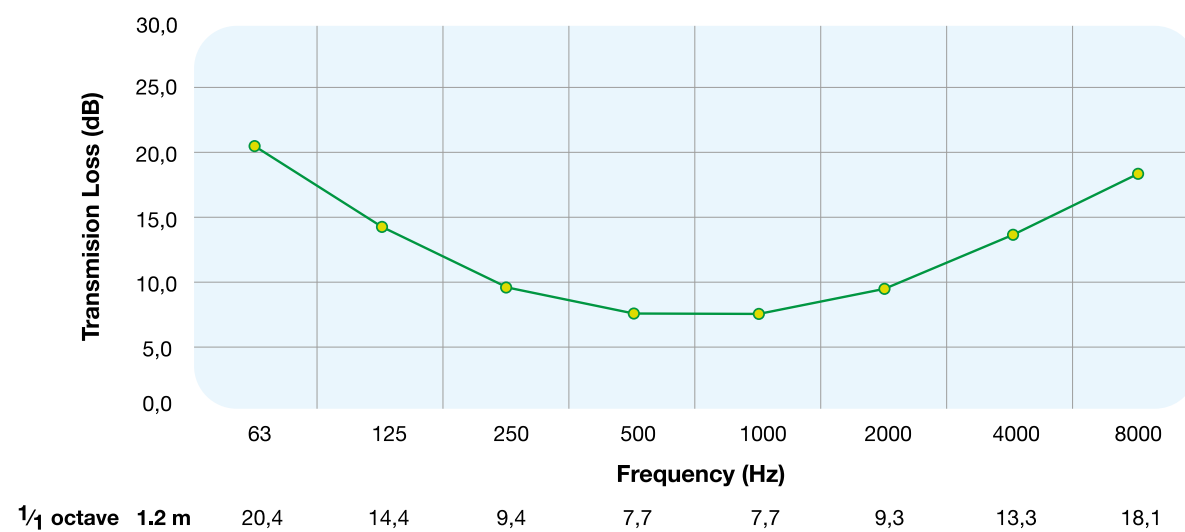

SOUNDROP AFS-NW - Ø 127 mm - 1.0 m

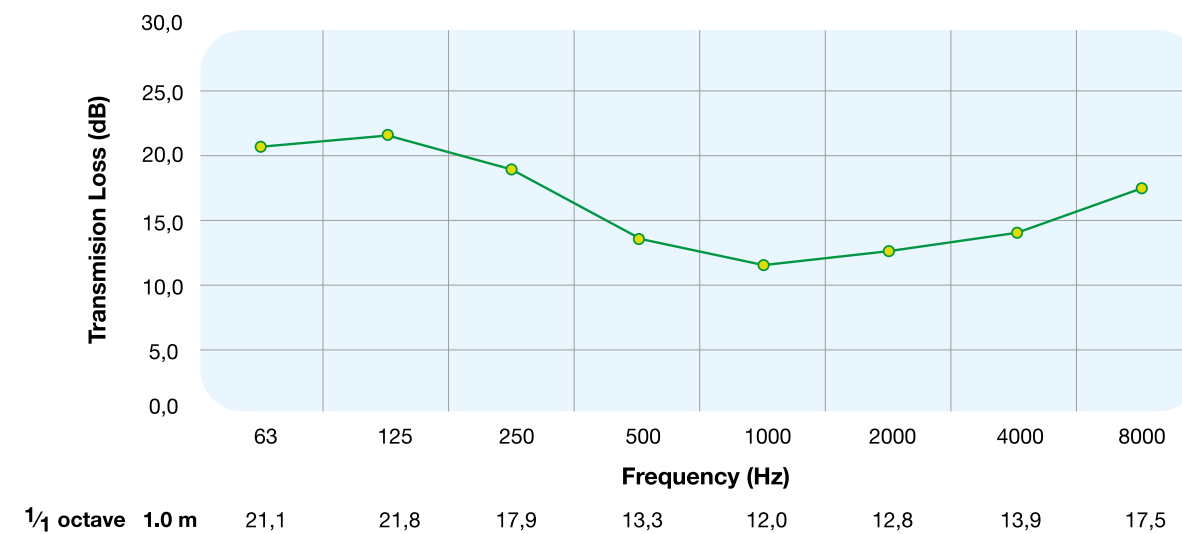


SOUNDROP AFS.P - Ø 250 mm - 0.6 m

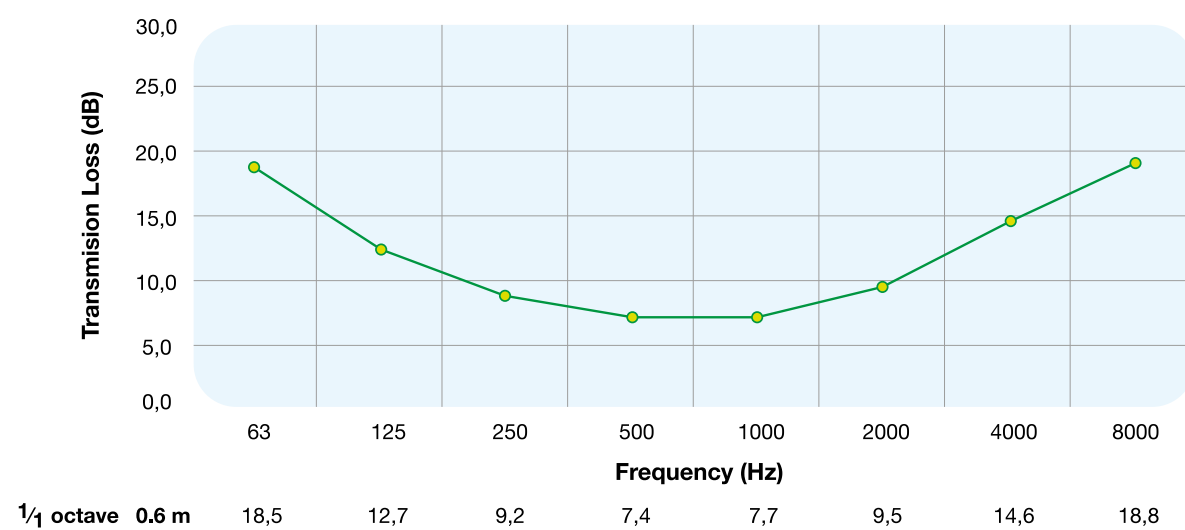


PRESSURE LOSS DIAGRAMS

ALUAFS, ISOAFS-ALU, SONOAFS-ALU, COMBIAFS
PRESSURE LOSS CHARACTERISTICS

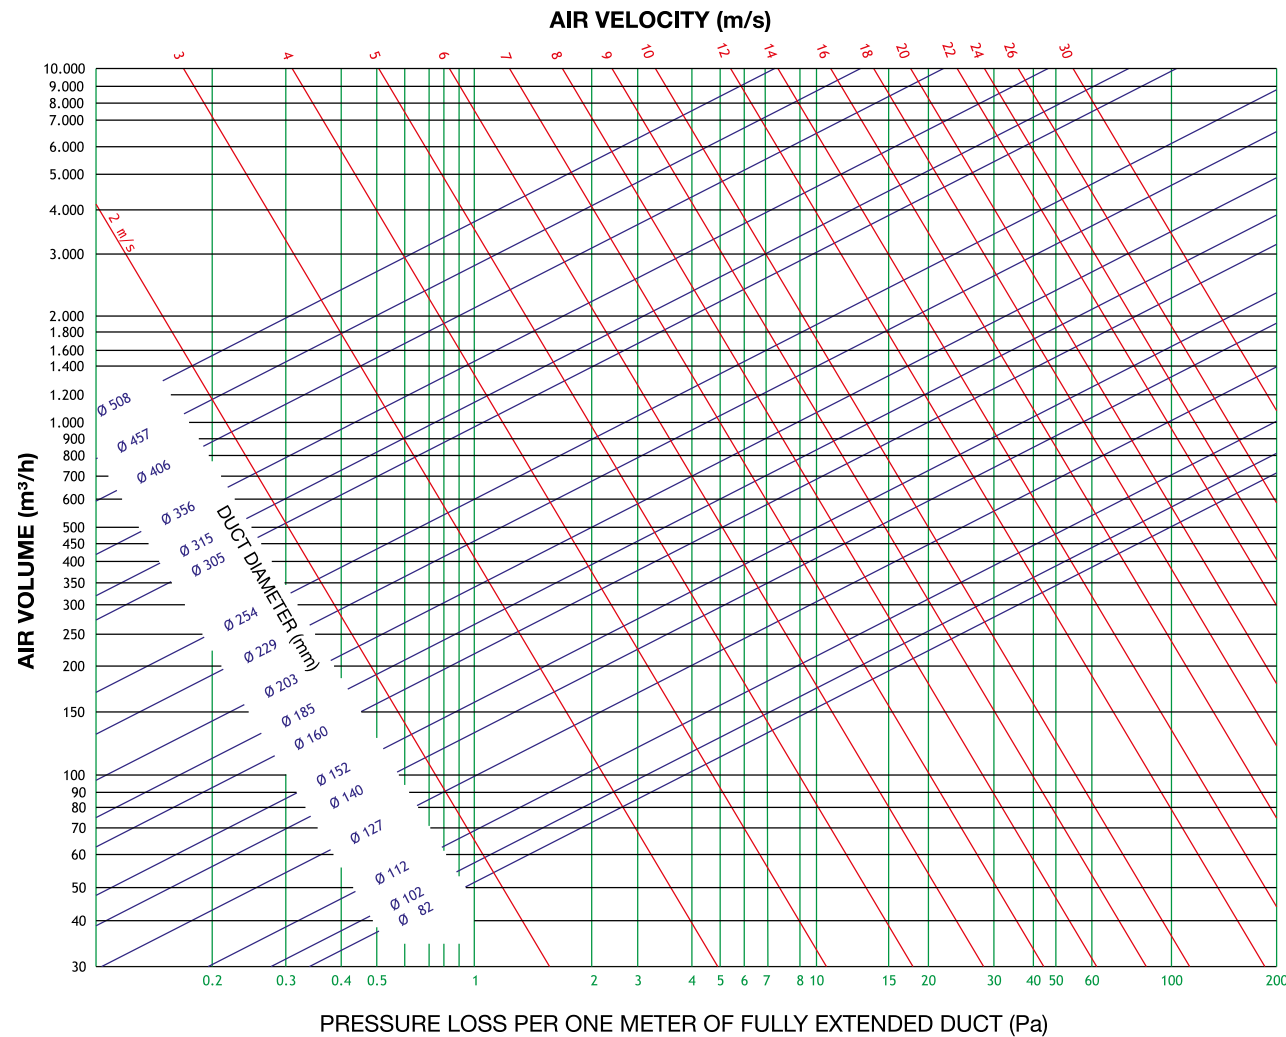


PRESSURE LOSS DIAGRAMS

POLYAFS, ISOAFS-POLY
PRESSURE LOSS CHARACTERISTICS

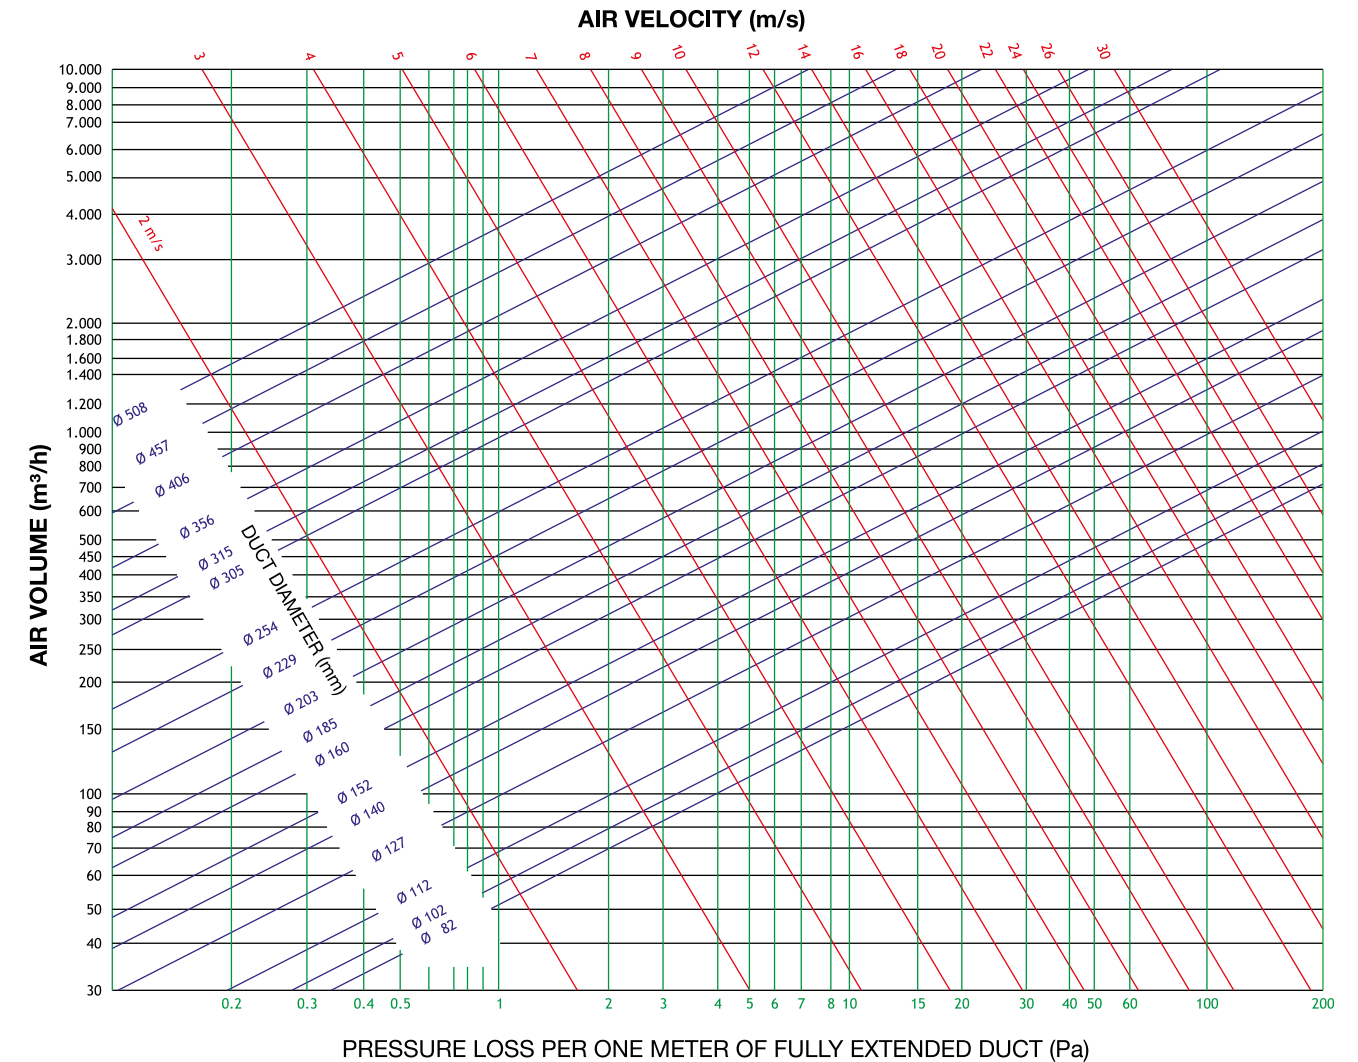

BEND LOSS COEFFICIENTS

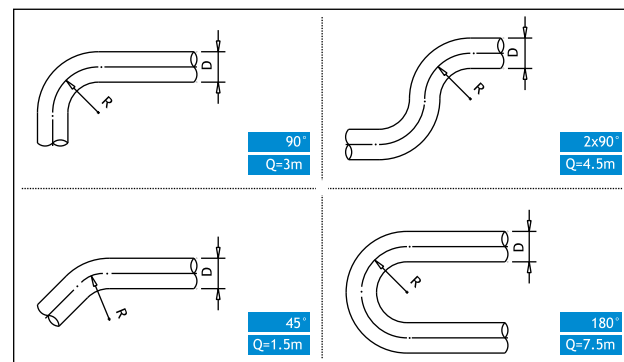

Temperature	-20°C	-0°C	+20°C	+40°C	+60°C	+80°C	+100°C
Correction Fac.	1,158	1,073	1,000	0,936	0,880	0,830	0,785

(R / D = 1)

Equivalent Length

$$Z = Q \times \frac{D}{300}$$


Z = Equivalent length, m
Q = Bend loss coefficient
D = Duct diameter, mm

Example

Air Velocity = 5m/s
Duct Diameter = 203mm
Pressure Loss = ?
90° Bend = 1 piece
Duct Length = 4m

Pressure loss in 1 m Duct = 3Pa
Bend loss coefficient = 3
Equivalent Length = $3 \times \frac{203}{300} = 2.03\text{m}$
Pressure Loss = $(2.03 + 4)\text{m} \times 3\text{Pa/m} = 18.09\text{Pa}$

BEND LOSS COEFFICIENTS

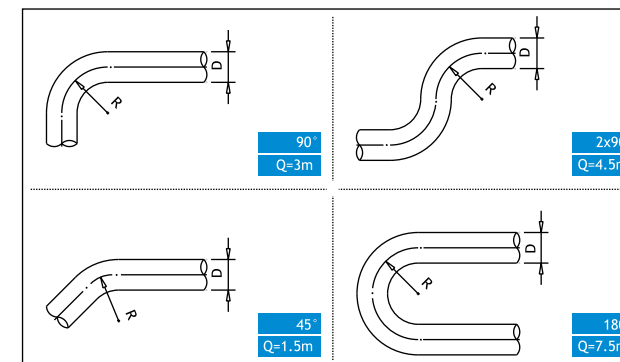

Temperature	-20°C	-0°C	+20°C	+40°C	+60°C	+80°C	+100°C
Correction Fac.	1,158	1,073	1,000	0,936	0,880	0,830	0,785

(R / D = 1)

Equivalent Length

$$Z = Q \times \frac{D}{300}$$

Z = Equivalent length, m
Q = Bend loss coefficient
D = Duct diameter, mm


Example

Air Velocity = 5m/s
Duct Diameter = 203mm
Pressure Loss = ?
90° Bend = 1 piece
Duct Length = 4m


Pressure loss in 1 m Duct = 3.04Pa
Bend loss coefficient = 3
Equivalent Length = $3 \times \frac{203}{300} = 2.03\text{m}$
Pressure Loss = $(2.03 + 4)\text{m} \times 3.04\text{Pa/m} = 18.33\text{Pa}$

PRESSURE LOSS DIAGRAMS

SEMAFS, SEMIAFS-INOX PRESSURE LOSS CHARACTERISTICS

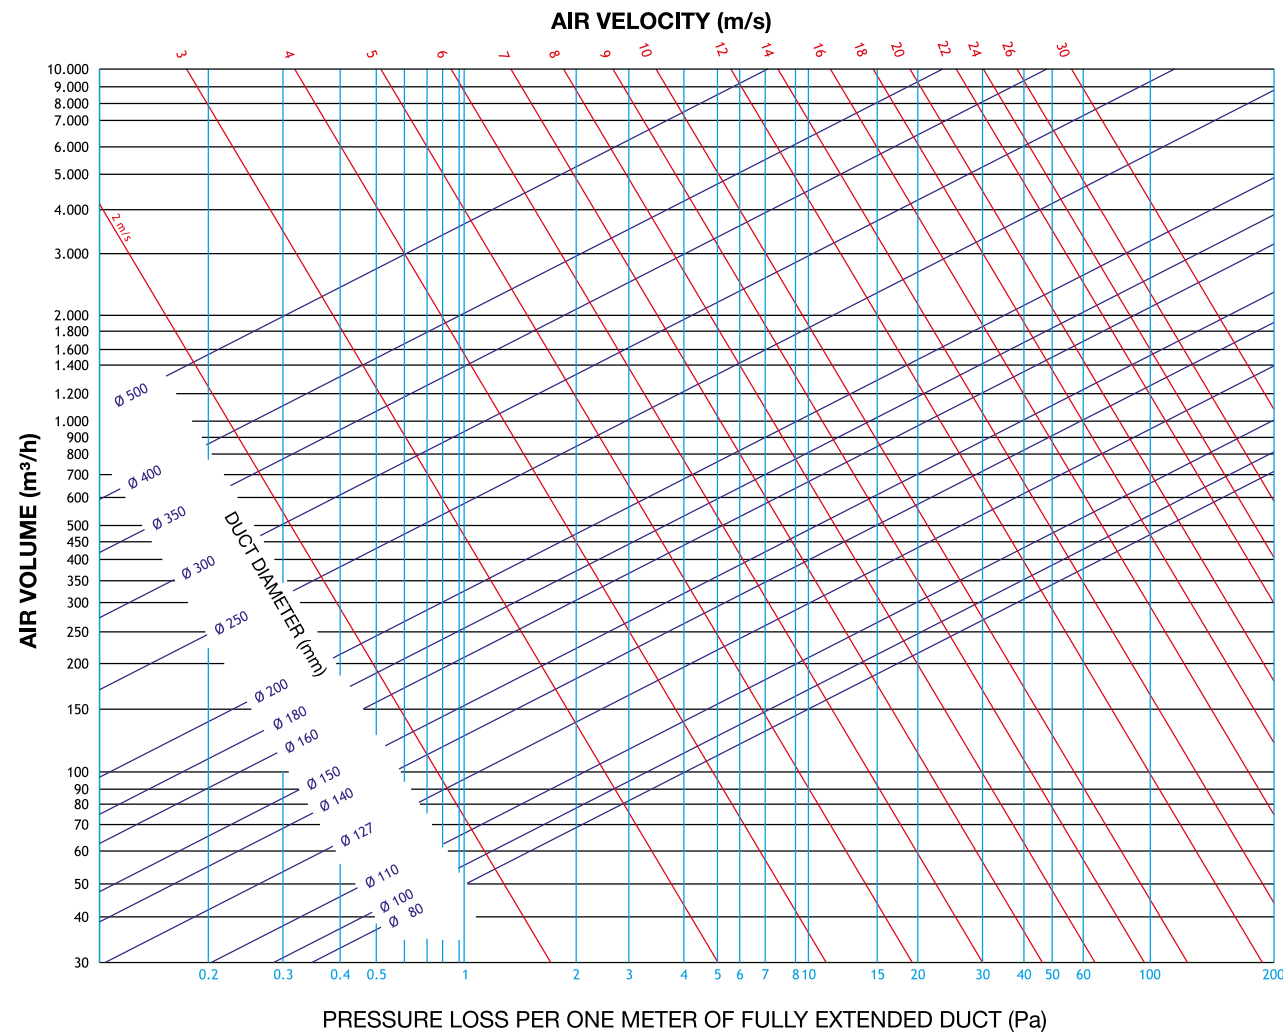

BEND LOSS COEFFICIENTS

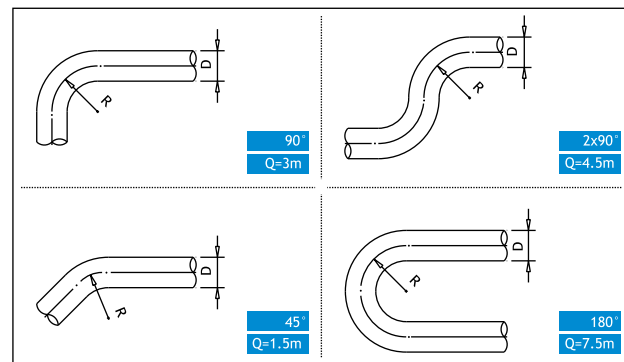

Temperature	-20°C	-0°C	+20°C	+40°C	+60°C	+80°C	+100°C
Correction Fac.	1,158	1,073	1,000	0,936	0,880	0,830	0,785

SEMAFS (R / D = 1)
SEMAFS-INOX (R / D = 5)

Equivalent Length

$$Z = Q \times \frac{D}{300}$$

Z = Equivalent length, m
Q = Bend loss coefficient
D = Duct diameter, mm

Example


Air Velocity = 5m/s
Duct Diameter = 200mm
Pressure Loss = ?

90° Bend = 1 piece
Duct Length = 4m


Pressure loss in 1 m Duct = 3.12Pa (TABLO-1)
Bend loss coefficient = 3 (TABLO-2)
Equivalent Length = $3 \times \frac{200}{300} = 2.0m$
Pressure Loss = $(2.0 + 4)m \times 3.12Pa/m = 18.72Pa$

PRESSURE LOSS DIAGRAMS

PVCAFS, ISOAFS-PVC, VINYLAFS PRESSURE LOSS CHARACTERISTICS

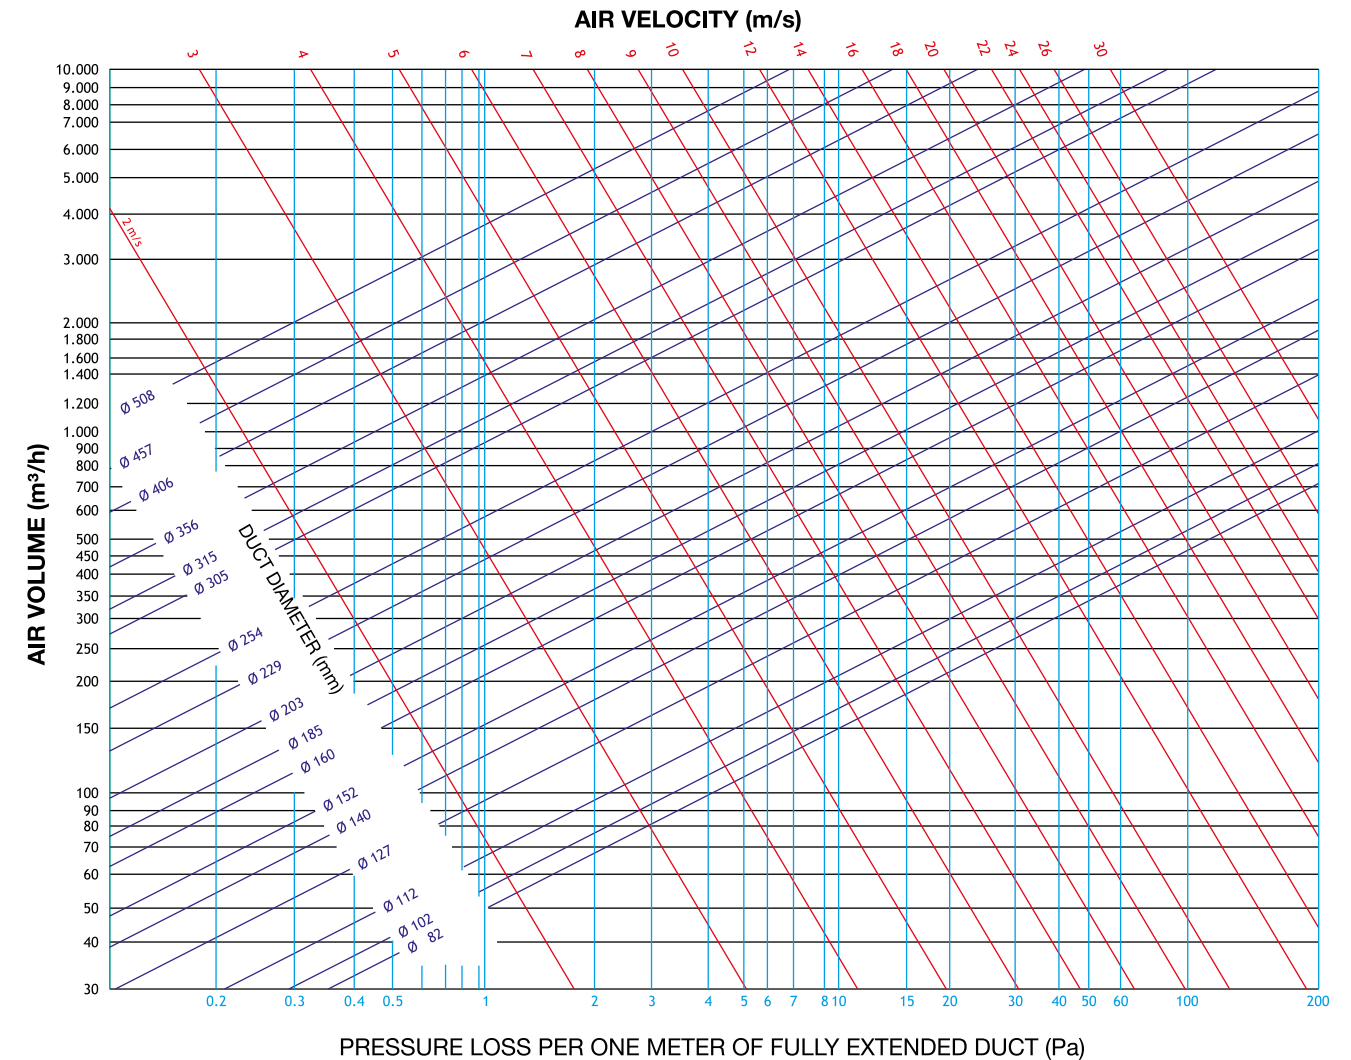

BEND LOSS COEFFICIENTS

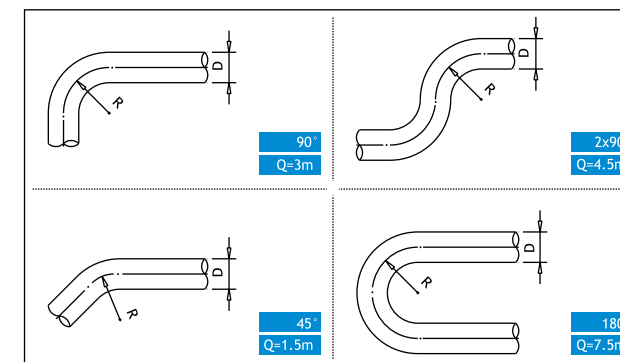

Temperature	-20°C	-0°C	+20°C	+40°C	+60°C	+80°C
Correction Fac.	1,158	1,073	1,000	0,936	0,880	0,830

(R / D = 1)

Equivalent Length

$$Z = Q \times \frac{D}{300}$$

Z = Equivalent length, m
Q = Bend loss coefficient
D = Duct diameter, mm

Example



Air Velocity = 5m/s
Duct Diameter = 203mm
Pressure Loss = ?

90° Bend = 1 piece
Duct Length = 4m

Pressure loss in 1 m Duct = 3.22 Pa
Bend loss coefficient = 3
Equivalent Length = $3 \times \frac{203}{300} = 2.03m$
Pressure Loss = $(2.03 + 4)m \times 3.22Pa/m = 19.42Pa$


PRESSURE LOSS DIAGRAMS

SMART 100

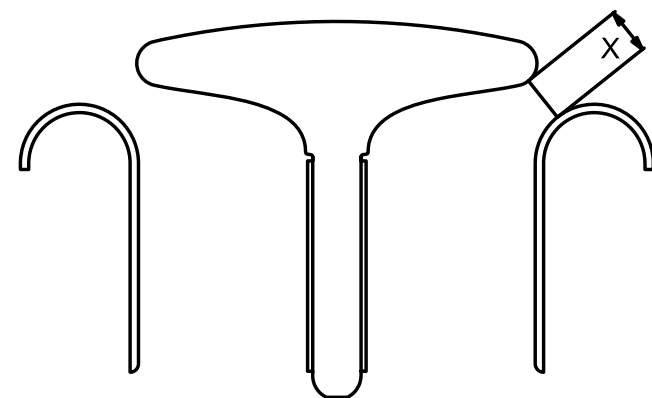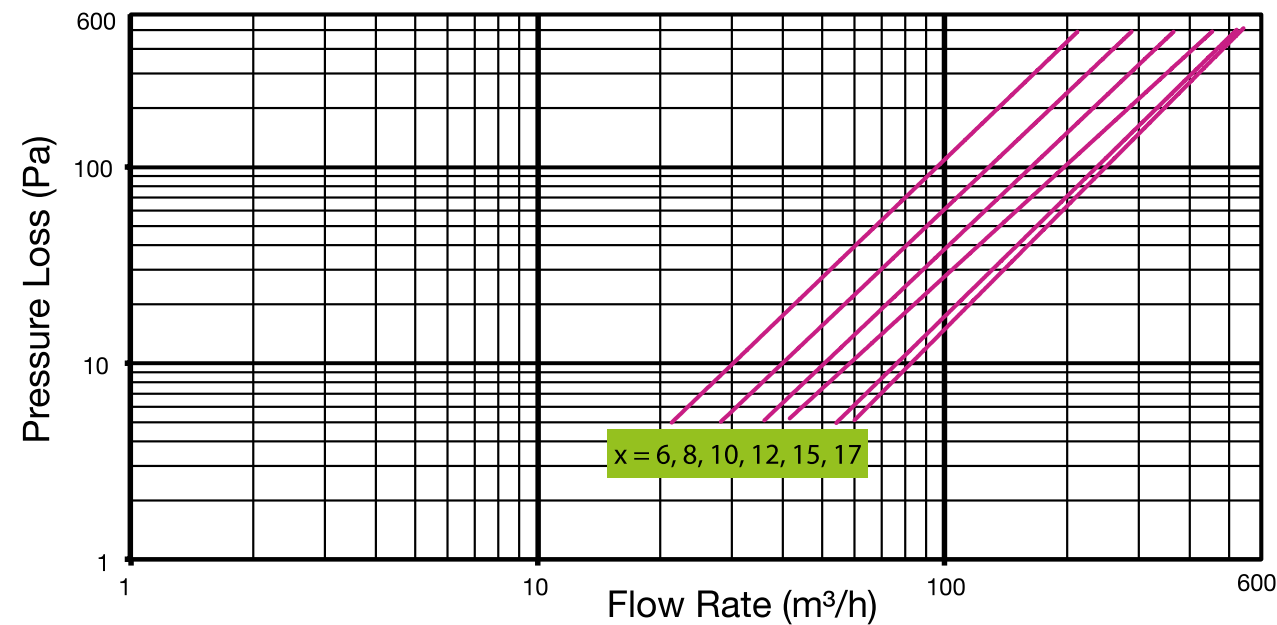

x : the smallest distance between disc of lid and flanged diffuser



TECHNICAL PROPERTIES

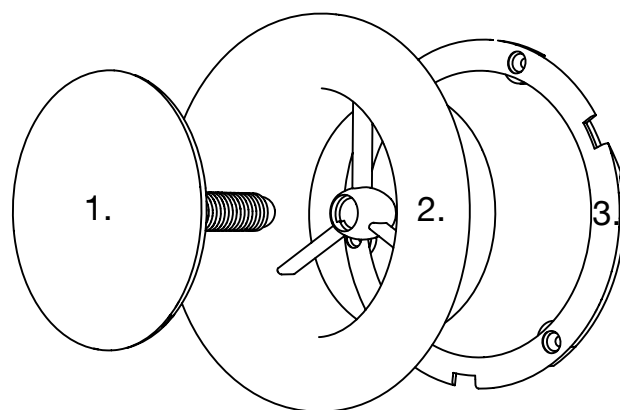

1. Adjustable Lid
2. Flanged Diffuser
3. Mounting Ring


Pressure loss test results conforming with ASHRAE 70 standard

SMART 125

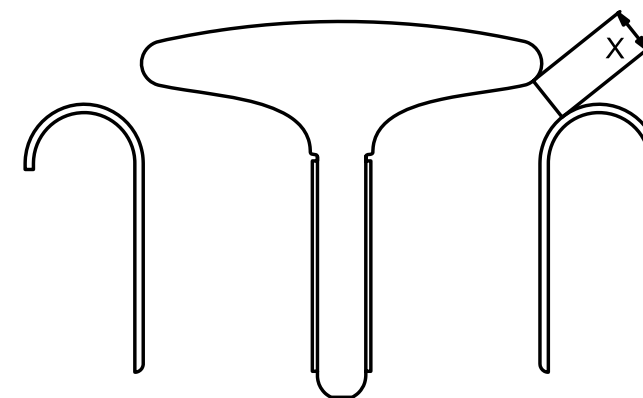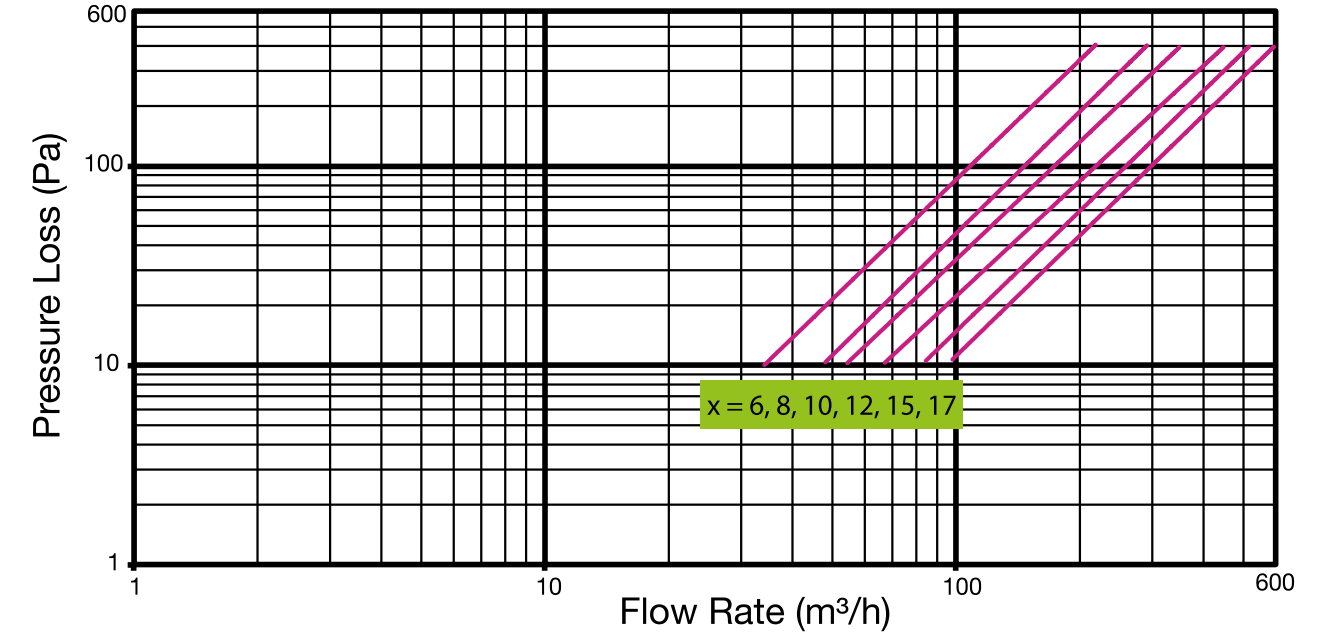

x : the smallest distance between disc of lid and flanged diffuser

TECHNICAL PROPERTIES


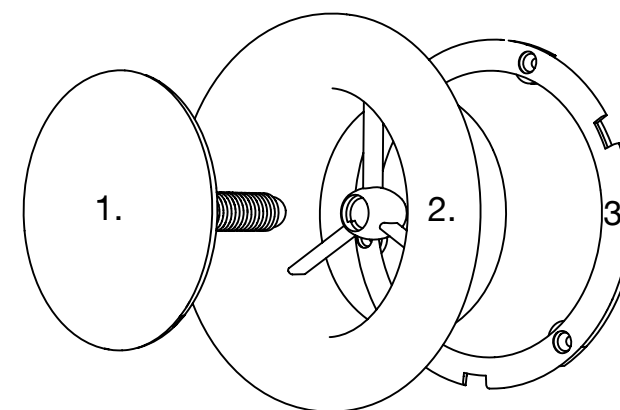


1. Adjustable Lid
2. Flanged Diffuser
3. Mounting Ring

Pressure loss test results conforming with ASHRAE 70 standard


PRESSURE LOSS DIAGRAMS

SMART 150

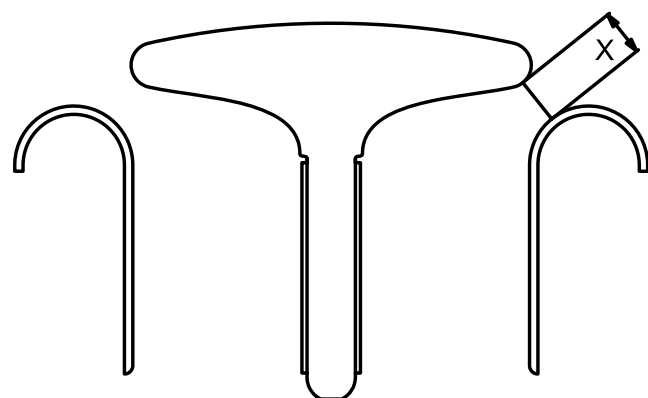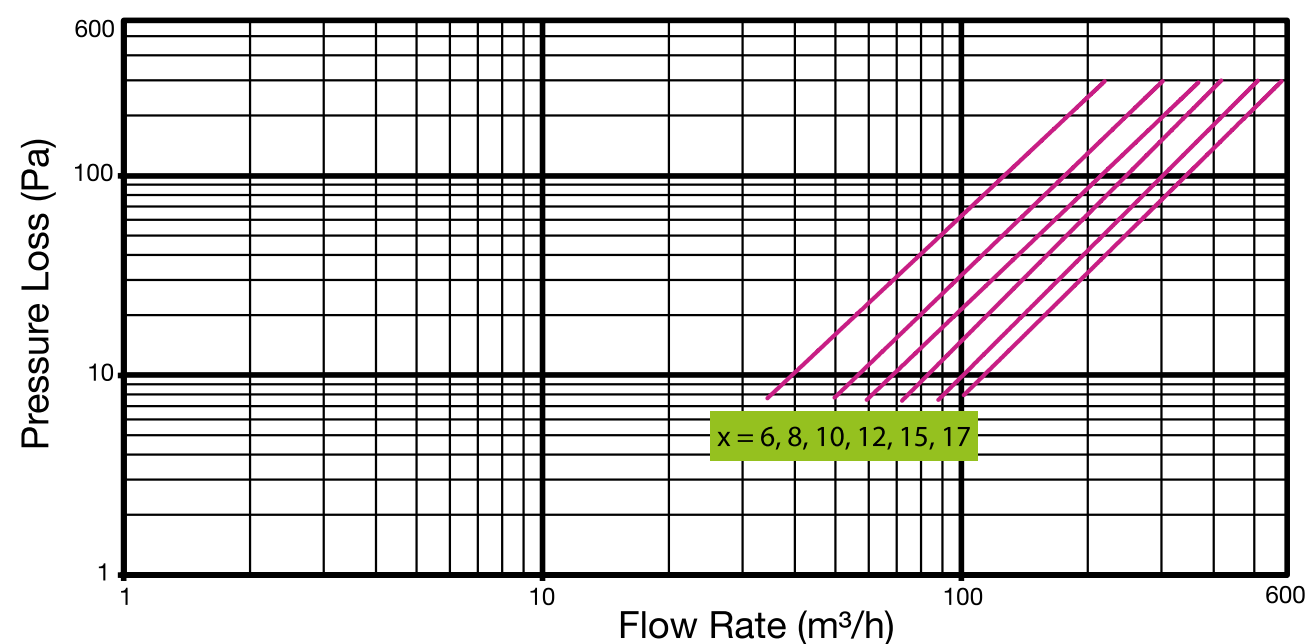

x : the smallest distance between disc of lid and flanged diffuser

TECHNICAL PROPERTIES

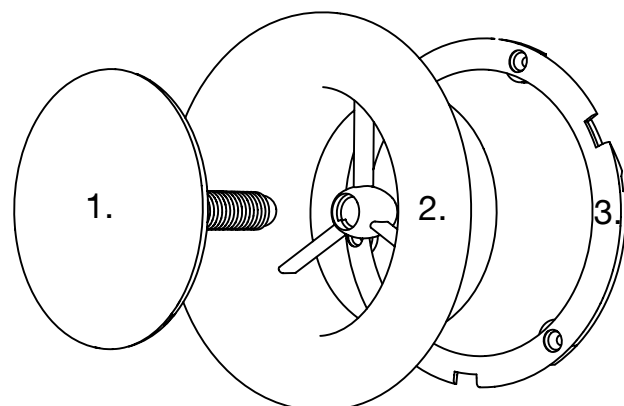

1. Adjustable Lid
2. Flanged Diffuser
3. Mounting Ring

Pressure loss test results conforming with ASHRAE 70 standard

CHEMICAL RESISTANCE OF TPU INDUSTRIAL HOSE

Chemical	Temperature, °C	SIMFLEKS TPU
Acetone	RT	0
Al-chloride, aqueous, 5 %	RT	+
Ammonia, 10 %	RT	+
Aniline	RT	-
IRM oil 901	80	+
IRM oil 902	80	+
IRM oil 903	80	0/+
Petrol, standard grade	RT	+
Petrol, premium grade	RT	0/+
Benzene	RT	0
Butanol	RT	0
Butyl acetate	RT	-
Cyclohexanol	RT	0
Diesel oil	RT	+
Dimethyl formamide	RT	-
Fe chloride, aqueous, 5 %	40	0
Ethyl acetate	RT	-
Ethyl alcohol	RT	0
Ethyl ether	RT	+
Acetic acid, 20 %	RT	0
Potassium hydroxide solution 1 N	RT	+ / 0
Sodium chloride solution, conc.	RT	+
Isopropanol	RT	0
Methanol	RT	0
Methanol/benzene, 15/85	RT	+ / 0
Methylene chloride	RT	0 / -
Methyl ethyl ketone	RT	0
Mineral oil	80	+
Soda soap fat	RT	+
Soda soap fat + 20 % water	RT	+ / 0
Sodium hydroxide solution N	RT	+ / 0
N-methyl pyrrolidone	RT	-
Nitric acid, 20 %	RT	-
Hydrochloric acid, 20 %	RT	0
Sulphuric acid, 20 %	RT	0
Sea water	RT	+ *
Carbon Tetrachloride	RT	0 / -
Trichloro-ethylene	RT	0 / -
Tetrahydrofurane	RT	-
Toluene	RT	-
Water	RT	+
	80	0 / +
	100	0

+ = resistant over a prolonged period
 0 = short-term contact possible under certain conditions
 - = not resistant, pronounced attack or dissolution
 * = microbial attack possible
 RT = room temperature, 23 °C



INSTALLATION GUIDE



INSTALLATION OF FLEXIBLE AIR DUCT

FLEXIBLE AIR DUCT INSTALLATION GUIDE

Flexible air ducts are specifically used for low and medium pressure heating, cooling, ventilation, air conditioning and exhaust systems.

It is of utmost important to realize that air leakage and pressure loss can seriously affect the system performance. Choosing the right installation elements and paying attention to technical details are also important for maximum efficiency.

To avoid these defects, follow the instructions included in this guide.

Appropriate installation provides maximum productivity with minimum energy consumption, resulting in time and cost saving.

CHOOSING THE RIGHT DIAMETER

In choosing the right diameter, calculated pressure loss is very important. Optimum air velocity should be 3 m/s in flexible air ducts.

As shown in Table 1 pressure loss increases by 498% when the air velocity increases from 2.79 m/s to 5.48 m/s.

AIR FLOW (m³/h)	Ø DUCT DIA. (mm)	AIR VELOCITY (m/s)	PRESSURE LOSS (Pa)	PRESSURE LOSS DIFFERENCE %
1000	Ø 254	5.48	2.93	498 %
1000	Ø 305	3.80	1.11	126 %
1000	Ø 315	3.56	0.94	92 %
1000	Ø 356	2.59	0.49	0 %

TABLE 1

TO DETERMINE THE INSTALLATION LENGTH OF AFS FLEXIBLE AIR DUCTS

Flexible air ducts should be installed in fully extended in fully extended form to obtain a smooth and flat inner surface. This will minimize pressure loss and keep the diameter steady.

The inner surface of AFS flexible air ducts remains smooth and flat when extended, due to its being manufactured from stronger and thicker aluminium than competitive products.

BENDS AND ELBOWS




The number of bends, the angle of each bend and the amount of sag allowed between support joints will seriously affect system performance due to the increased air resistance that each element introduces. It is important to keep the number of bends to a minimum.

The friction loss in a bend of 90° bends, it is important that the nominal radius be less than the diameter of the duct. It is important to check that the ducts to be used are suitable for bending, and that when bent they are not deformed.

AFS flexible air ducts have a constant diameter throughout the installation. Due to their multi-layer, laminated, construction being reinforced with a steel wire spiral, they resist deformation and preserve their diameter.

The bending radius of AFS flexible air ducts is calculated as follows;

Bending Radius = Duct Diameter x 0.50

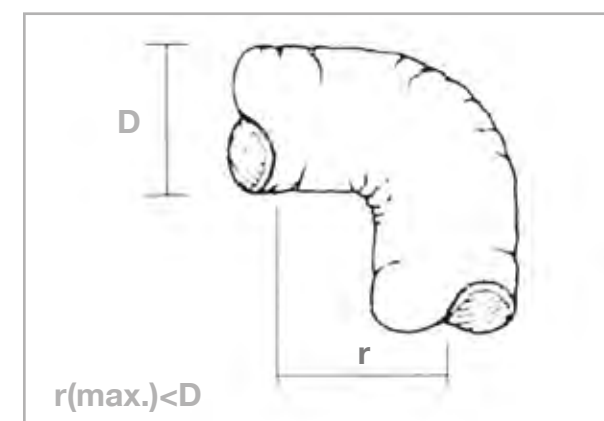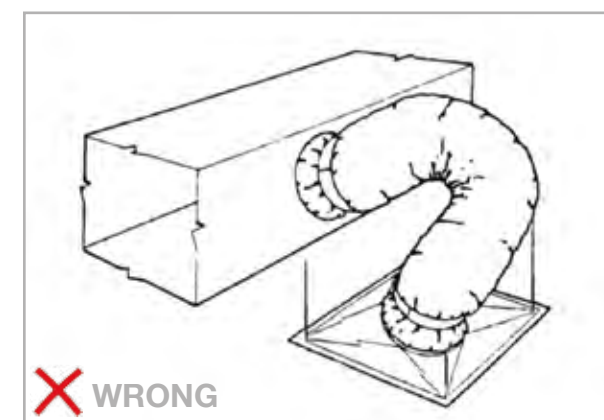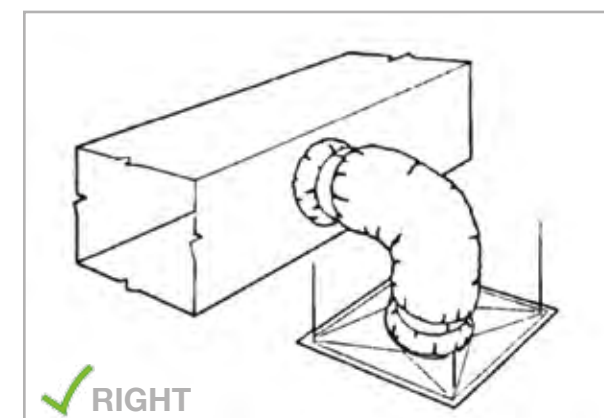

SUPPORTING FLEXIBLE DUCT

Flexible air ducts should be supported at least every 1.5 m. Max. permissible sag is 40 mm per meter.






Long horizontal duct installations with sharp bends should have additional supports before and after the bend; the additional supports should be placed away from the bend a distance equal to the diameter of the duct used.

Due to the special technique used in producing the highly resilient multi-layer structure, AFS flexible air ducts are self-supporting even with widely spaced supports.

Flexible air duct hangers or saddles should be of sufficient width to prevent any constriction of the duct diameter.


The hangers or saddles should be at least 40 mm wide.

Flexible air ducts may rest on ceiling or truss supports. Do not install flexible air ducts near hot equipments (e.g. steam pipes, furnaces, boilers, etc.) This situation may adversely affect the temperature of the air passing through the duct.

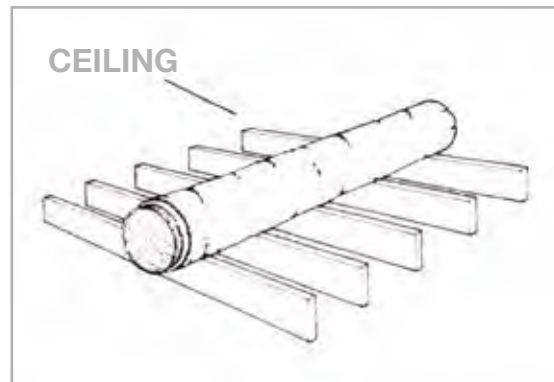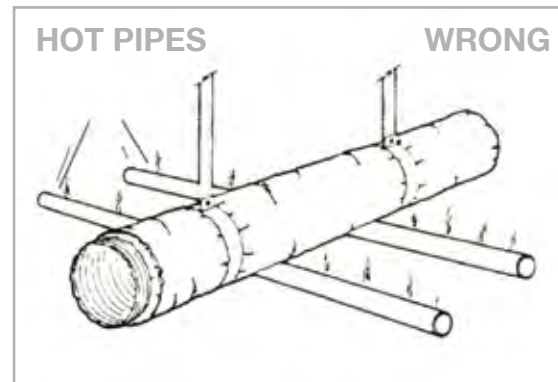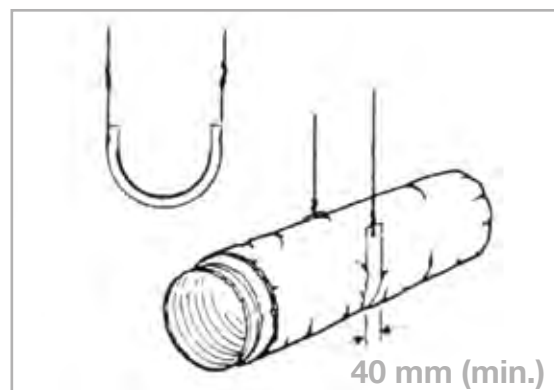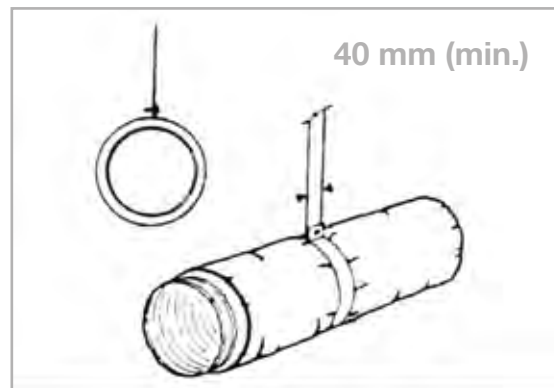
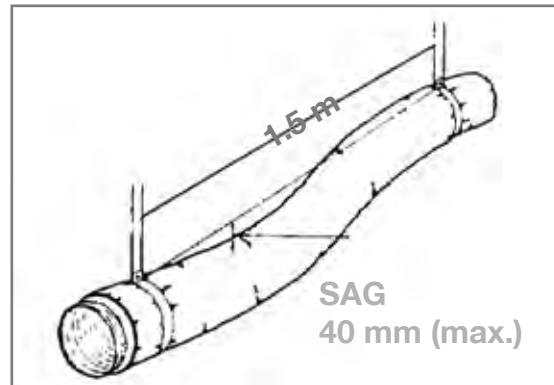


SUPPORTING FLEXIBLE DUCT


Flexible air ducts should be supported between metal connections and bends, while allowing the duct to extend straight for a few centimeters before making the bend. This will prevent damage to the flexible duct by the edge of the metal collar.

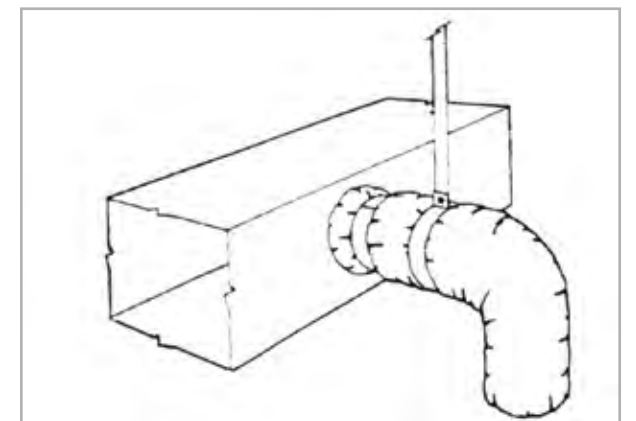

It is important that inlet and outlet vents should be hung by independent supports. Flexible air ducts should not be subjected to load.

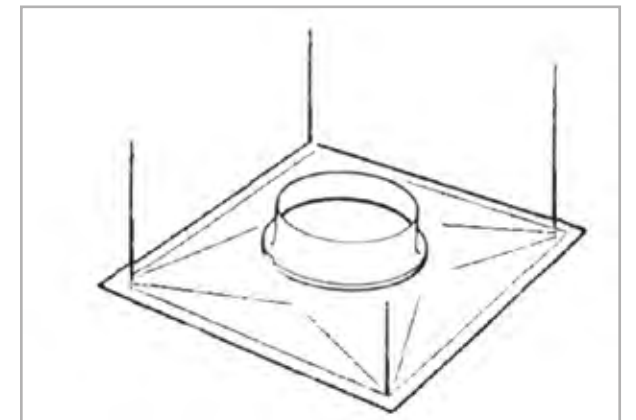
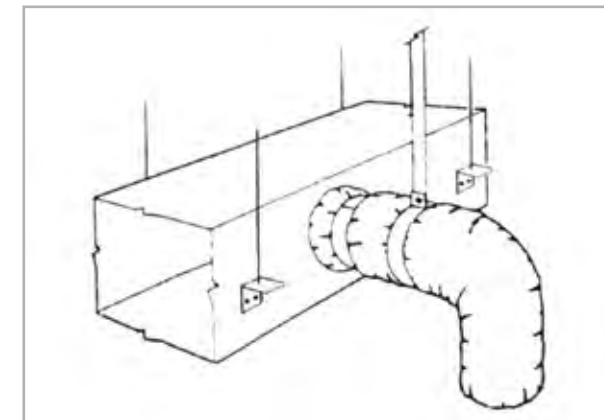


Vertically installed ducts should be supported at least every 1.8 m.

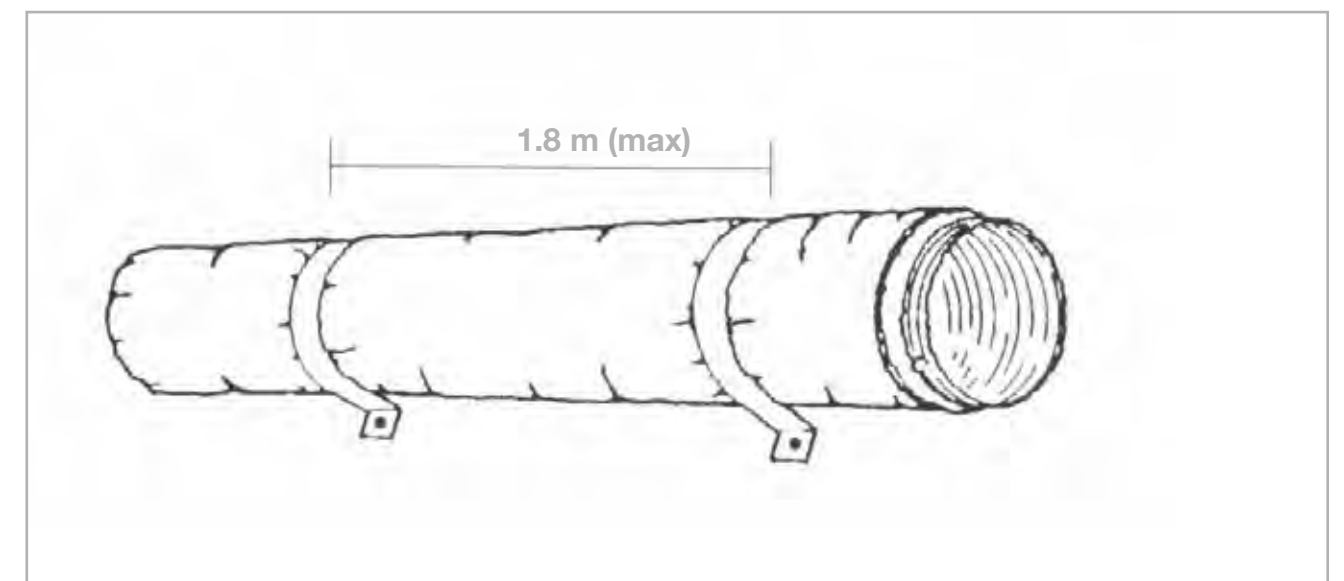


STEP BY STEP INSTRUCTIONS FOR FLEXIBLE AIR DUCT CONNECTIONS


1. Never open a box from the ends to avoid recoil effect. Make a square hole near the upper side of the duct box by beginning from the top lid edge (as shown in the drawing) the hole should not be more than 5 cm larger than the duct diameter. Pull out the duct to the desired length. Cut around it with a knife or scissors. Then cut the highly resilient spiral steel wire with wire cutter. Push the remaining duct back into the box to prevent it from deformation and waste which may occur if the duct is left outside the package.

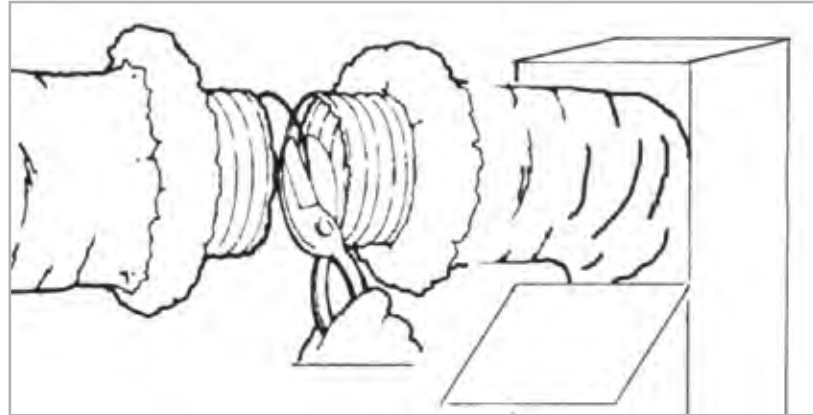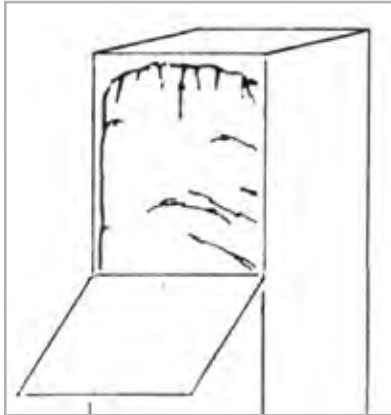

2. Pull back the jacket and insulation material from inner core. Slide at least 25mm of duct over the connection element. Wrap the duct with at least 2 turns of duct tape to form an airtight seal and secure the duct using a metal or plastic clamp.

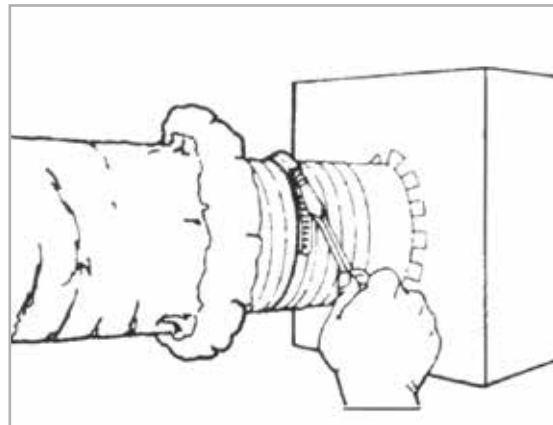


3. Pull the jacket and insulation back over the duct. Tape the jacket with at least 2 wraps of duct tape. A clamp can be used instead of or in combination with the duct tape.

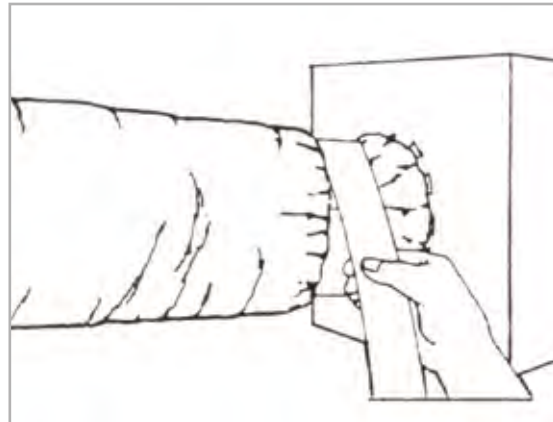


- Disregard references to the insulation material and the jacket for non-insulated ducts.
- It is recommended that the connection element's bead face the outside of the collar.
- Use reinforced aluminium foil tapes that are suitable for low and high temperature on the connection element and flexible air duct connection.
- Use stainless steel metal clamps to the secure the duct. If plastic clamps are used, tighten the clamps by using the correct tool.

FLEXIBLE DUCT SPLICING INSTRUCTIONS


1. Pull back the jacket and insulation material. Slide each core at least 25 mm over the connection element.

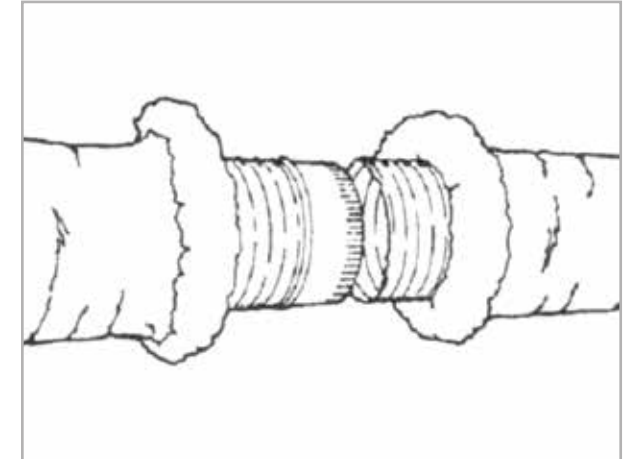

2. Secure the air duct with 2 clamps.

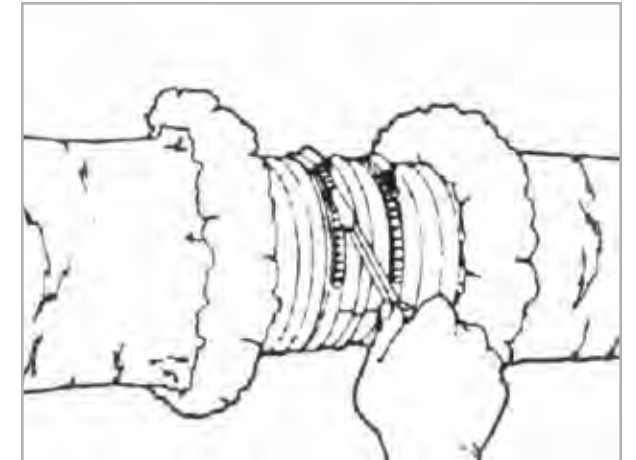


3. Tape the air ducts together with at least 2 turns of duct tape

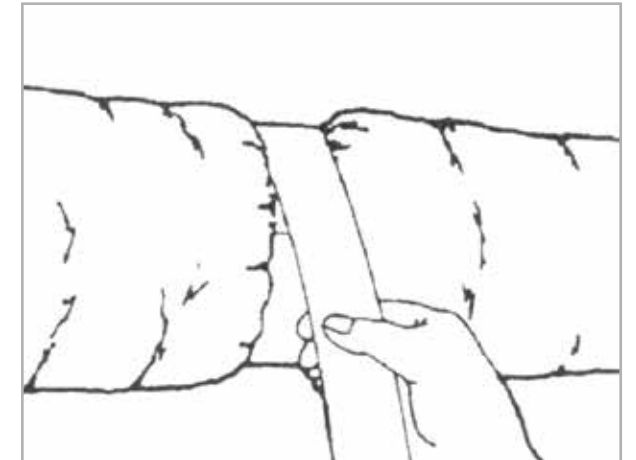


- Disregard references to the insulation material and the jacket for non-insulated ducts.
- It is recommended that the connection element's bead face the outside of the collar.
- Use reinforced aluminium foil tapes that are suitable for low and high temperature on the connection element and flexible air duct connection.
- Use stainless steel metal clamps to the secure the duct. If plastic clamps are used, tighten the clamps by using the correct tool.

SEMI FLEXIBLE DUCT CONNECTION INSTRUCTIONS


1. Cut the Semi flexible air duct all round at the desired length with a knife or snips.

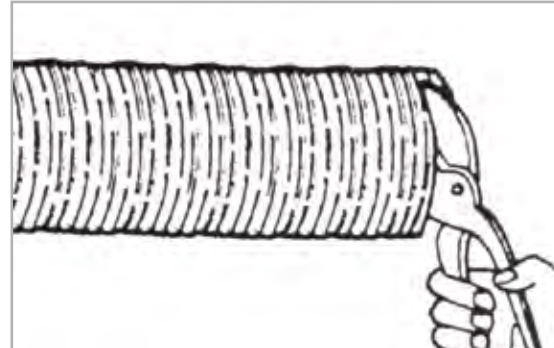


2. If the system pressure is above 1000 Pa, use mastic on the connection element. Slide at least 25 mm of the duct over the connection element.

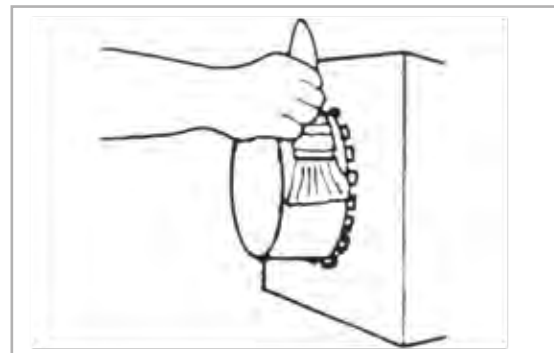

3. Screw the semi flexible air duct to the connection element with equally spaced screws. For diameters smaller than 300 mm use 3 screws; for larger diameters 5 screws.

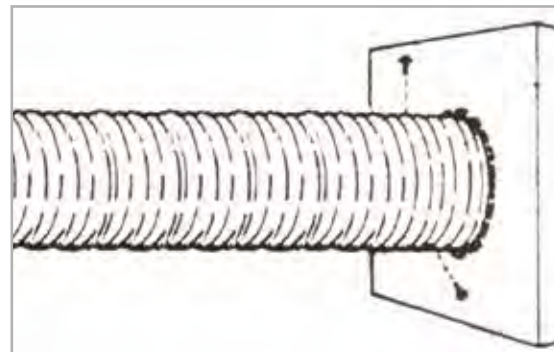

4. Wrap the duct with at least 2 turns of duct tape to cover the screw heads and form an airtight seal.

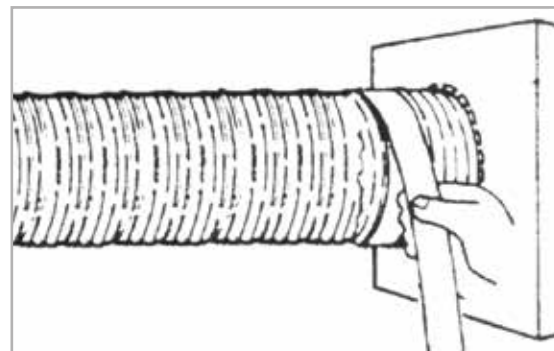


- Use standard duct mastics.
- Use reinforced aluminium foil tapes that are suitable for low and high temperatures on the connection element and semi flexible air duct connection.

SEMI FLEXIBLE DUCT SPLICING INSTRUCTIONS


1. If the system pressure is above 1000 Pa, use mastic on the connection element.




2. Slide at least 25 mm of the duct over the connection element.

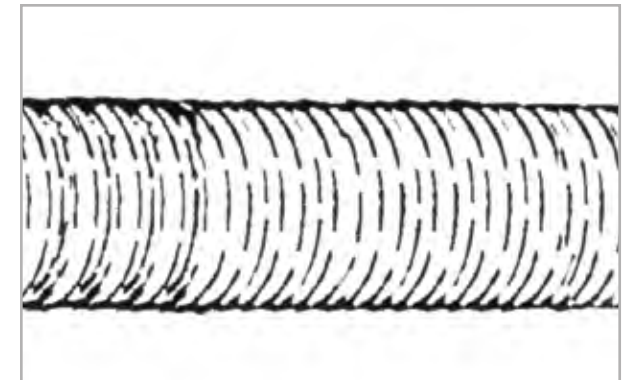

3. Screw the semi flexible air duct to the connection element with equally spaced screws. For diameters smaller than 300 mm use 3 screws; for larger diameters 5 screws.

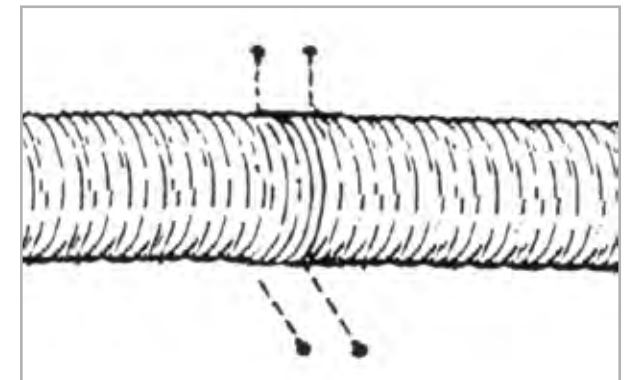


4. Wrap the duct with at least 2 turns of duct tape to cover the screw heads and form an airtight seal.

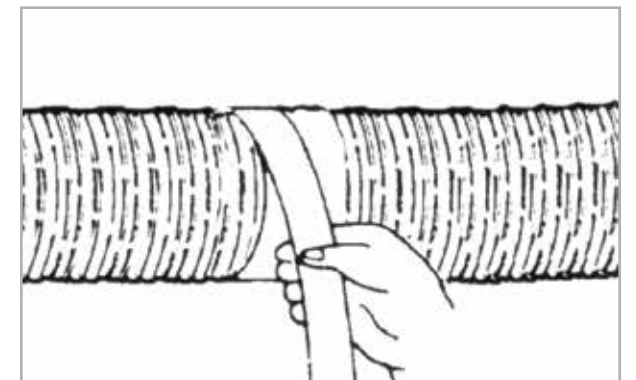





MONTAGE OF P SMART AIR DISC VALVE

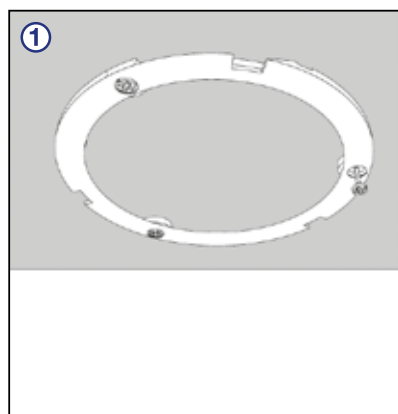


1. Screw the mounting ring where product needs to be mounted.

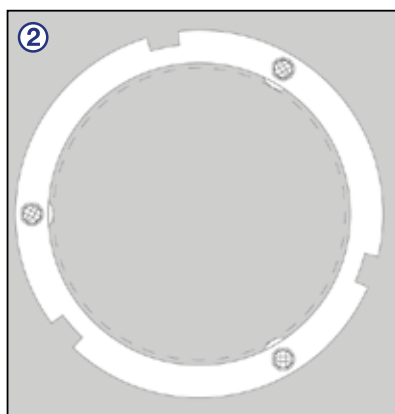


2. Use the fins on mounting ring as a template for punching a hole.

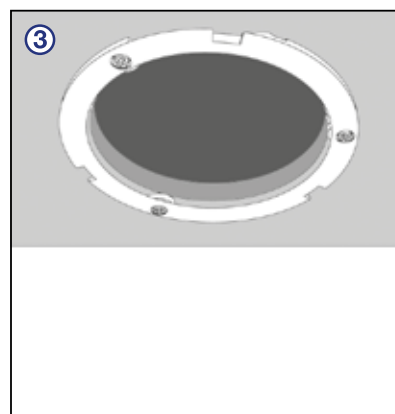


3. Punch the hole by the assistance of the template.

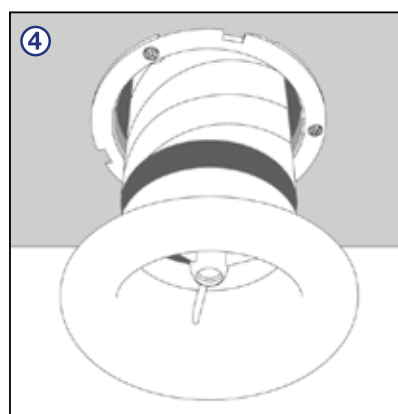


4. Connect the duct onto collar of flanged diffuser.

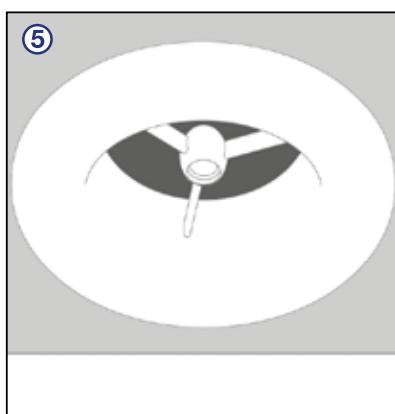


5. Place the fixture elements behind flanged diffuser where the gaps on the ring coincide with.

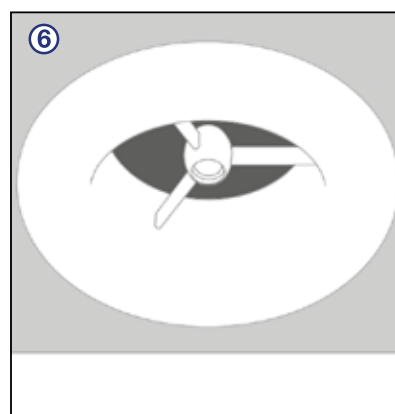

6. Turn the flanged diffuser clock-wise to secure locking.

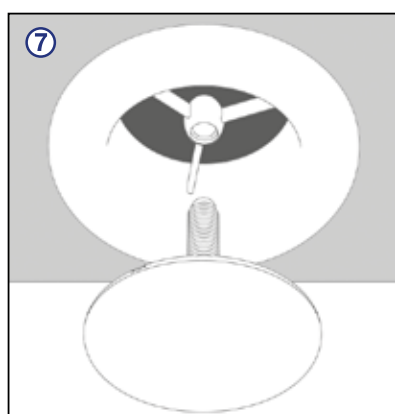

7. Screw the lid onto threaded hole at the middle of flanged diffuser.

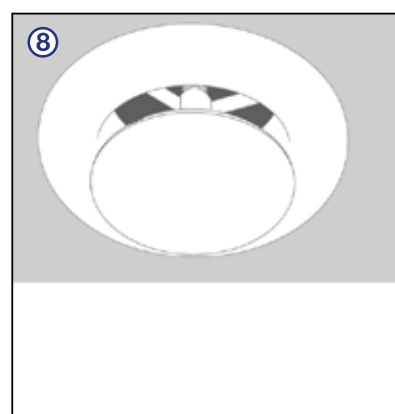


8. Rotate the lid to adjust air flow rate.

PACKING INFORMATION




ALUAFS



TRUCK PALLET						
						
Ø (mm)	Length (m)	Box Dimensions (mm)	Truck Pallet Dimensions (cm)	Boxes Per Pallet	Rows Per Pallet	Columns Per pallet
52	10	135 x 135 x 370	81 x 111 x 245	306	18	17
68	10	100 x 100 x 550	80 x 110 x 245	368	16	23
76	10	100 x 100 x 550	80 x 110 x 245	368	16	23
82	10	100 x 100 x 400	80 x 110 x 245	506	22	23
102	10	115 x 115 x 400	80 x 110 x 245	400	20	20
112	10	115 x 115 x 400	80 x 110 x 245	400	20	20
127	10	135 x 135 x 370	81 x 111 x 245	288	18	16
133	10	135 x 135 x 370	81 x 111 x 245	288	18	16
140	10	170 x 170 x 370	85 x 111 x 253	210	15	14
152	10	170 x 170 x 370	85 x 111 x 253	210	15	14
160	10	170 x 170 x 370	85 x 111 x 253	210	15	14
185	10	215 x 215 x 370	86 x 111 x 252	132	12	11
203	10	215 x 215 x 370	86 x 111 x 252	132	12	11
229	10	270 x 270 x 400	80 x 108 x 231	72	8	9
254	10	270 x 270 x 400	80 x 108 x 231	72	8	9
280	10	320 x 320 x 400	80 x 96 x 239	42	6	7
305	10	320 x 320 x 400	80 x 96 x 239	42	6	7
315	10	320 x 320 x 400	80 x 96 x 239	42	6	7
356	10	370 x 370 x 400	80 x 111 x 237	36	6	6
406	10	420 x 420 x 420	84 x 84 x 225	20	4	5
457	10	480 x 480 x 480	96 x 96 x 255	20	4	5
508	10	520 x 520 x 520	104 x 104 x 223	16	4	4
560	10	580 x 580 x 500				
610	10	640 x 640 x 500				
630	10	640 x 640 x 500				
710	10	720 x 720 x 500				
800	10	820 x 820 x 500				

NOTES:

40' HC PALLET						
						
Ø (mm)	Length (m)	Box Dimensions (mm)	Truck Pallet Dimensions (cm)	Boxes Per Pallet (Qty.)	Rows Per Pallet	Columns Per pallet
52	10	135 x 135 x 370	81 x 111 x 245	306	18	17
68	10	100 x 100 x 550	80 x 110 x 245	368	16	23
76	10	100 x 100 x 550	80 x 110 x 245	368	16	23
82	10	100 x 100 x 400	80 x 110 x 245	506	22	23
102	10	115 x 115 x 400	80 x 115 x 245	400	20	20
112	10	115 x 115 x 400	80 x 115 x 245	400	20	20
127	10	135 x 135 x 370	81 x 111 x 245	288	18	16
133	10	135 x 135 x 370	81 x 111 x 245	288	18	16
140	10	170 x 170 x 370	85 x 111 x 236	210	15	13
152	10	170 x 170 x 370	85 x 111 x 236	210	15	13
160	10	170 x 170 x 370	85 x 111 x 236	210	15	13
185	10	215 x 215 x 370	86 x 111 x 230	132	12	10
203	10	215 x 215 x 370	86 x 111 x 230	132	12	10
229	10	270 x 270 x 400	80 x 108 x 231	72	8	8
254	10	270 x 270 x 400	80 x 108 x 231	72	8	8
280	10	320 x 320 x 400	80 x 96 x 239	42	6	7
305	10	320 x 320 x 400	80 x 96 x 239	42	6	7
315	10	320 x 320 x 400	80 x 96 x 239	42	6	7
356	10	370 x 370 x 400	80 x 111 x 237	36	6	6
406	10	420 x 420 x 420	84 x 84 x 225	20	4	5
457	10	480 x 480 x 480	96 x 96 x 207	20	4	4
508	10	520 x 520 x 520	104 x 104 x 223	16	4	4
560	10	580 x 580 x 500				
610	10	640 x 640 x 500				
630	10	640 x 640 x 500				
710	10	720 x 720 x 500				
800	10	820 x 820 x 500				


NOTES:




PACKAGING INFORMATION

ISOAFS-ALU



TRUCK PALLET						
						
Ø (mm)	Length (m)	Box Dimensions (mm)	Truck Pallet Dimensions (cm)	Boxes Per Pallet	Rows Per Pallet	Columns Per pallet
52	10					
68	10					
76	10					
82	10	165 x 165 x 1100	83 x 110 x 253	70	5	14
102	10	185 x 185 x 1100	100 x 110 x 255	65	5	13
112	10	185 x 185 x 1100	100 x 110 x 255	65	5	13
127	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
133	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
140	10	235 x 235 x 1100	100 x 110 x 227	40	4	10
152	10	235 x 235 x 1100	100 x 110 x 227	40	4	10
160	10	235 x 235 x 1100	100 x 110 x 227	40	4	10
185	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
203	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
229	10	330 x 330 x 1100	100 x 110 x 246	21	3	7
254	10	330 x 330 x 1100	100 x 110 x 246	21	3	7
280	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
305	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
315	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
356	10	430 x 430 x 1100	86 x 110 x 230	10	2	5
406	10	480 x 480 x 1100	100 x 110 x 255	10	2	4
457	10	520 x 520 x 1100	104 x 110 x 223	8	2	4
508	10	570 x 570 x 1100	114 x 112 x 243	8	2	4
560	10	700 x 700 x 1100				
610	10	700 x 700 x 1100				
630	10	700 x 700 x 1100				
710	10	780 x 780 x 1100				
800	10	860 x 860 x 1100				

NOTES:

40' HC PALLET						
						
Ø (mm)	Length (m)	Box Dimensions (mm)	Truck Pallet Dimensions (cm)	Boxes Per Pallet	Rows Per Pallet	Columns Per pallet
52	10					
68	10					
76	10					
82	10	165 x 165 x 1100	83 x 110 x 230	65	5	13
102	10	185 x 185 x 1100	100 x 110 x 237	60	5	12
112	10	185 x 185 x 1100	100 x 110 x 237	60	5	12
127	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
133	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
140	10	235 x 235 x 1100	100 x 110 x 227	36	4	9
152	10	235 x 235 x 1100	100 x 110 x 227	36	4	9
160	10	235 x 235 x 1100	100 x 110 x 227	36	4	9
185	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
203	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
229	10	330 x 330 x 1100	100 x 110 x 246	21	3	7
254	10	330 x 330 x 1100	100 x 110 x 246	21	3	7
280	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
305	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
315	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
356	10	430 x 430 x 1100	86 x 110 x 230	10	2	5
406	10	480 x 480 x 1100	100 x 110 x 207	8	2	4
457	10	520 x 520 x 1100	104 x 110 x 223	8	2	4
508	10	570 x 570 x 1100				
560	10	700 x 700 x 1100				
610	10	700 x 700 x 1100				
630	10	700 x 700 x 1100				
710	10	780 x 780 x 1100				
800	10	860 x 860 x 1100				


NOTES:




PACKAGING INFORMATION

SONOAFS-ALU



TRUCK PALLET						
						
Ø (mm)	Length (m)	Box Dimensions (mm)	Truck Pallet Dimensions (cm)	Boxes Per Pallet	Rows Per Pallet	Columns Per pallet
52	10					
68	10					
76	10					
82	10	165 x 165 x 1100	83 x 110 x 253	70	5	14
102	10	185 x 185 x 1100	100 x 110 x 255	65	5	13
112	10	185 x 185 x 1100	100 x 110 x 255	65	5	13
127	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
133	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
140	10	235 x 235 x 1100	100 x 110 x 227	40	4	10
152	10	235 x 235 x 1100	100 x 110 x 227	40	4	10
160	10	235 x 235 x 1100	100 x 110 x 227	40	4	10
185	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
203	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
229	10	330 x 330 x 1100	100 x 110 x 246	21	3	7
254	10	330 x 330 x 1100	100 x 110 x 246	21	3	7
280	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
305	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
315	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
356	10	430 x 430 x 1100	86 x 110 x 230	10	2	5
406	10	480 x 480 x 1100	100 x 110 x 255	10	2	4
457	10	520 x 520 x 1100	104 x 110 x 223	8	2	4
508	10	570 x 570 x 1100	114 x 112 x 243	8	2	4
560	10	700 x 700 x 1100				
610	10	700 x 700 x 1100				
630	10	700 x 700 x 1100				
710	10	780 x 780 x 1100				
800	10	860 x 860 x 1100				

NOTES:

40' HC PALLET						
						
Ø (mm)	Length (m)	Box Dimensions (mm)	Truck Pallet Dimensions (cm)	Boxes Per Pallet	Rows Per Pallet	Columns Per pallet
52	10					
68	10					
76	10					
82	10	165 x 165 x 1100	83 x 110 x 230	65	5	13
102	10	185 x 185 x 1100	100 x 110 x 237	60	5	12
112	10	185 x 185 x 1100	100 x 110 x 237	60	5	12
127	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
133	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
140	10	235 x 235 x 1100	100 x 110 x 227	36	4	9
152	10	235 x 235 x 1100	100 x 110 x 227	36	4	9
160	10	235 x 235 x 1100	100 x 110 x 227	36	4	9
185	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
203	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
229	10	330 x 330 x 1100	100 x 110 x 246	21	3	7
254	10	330 x 330 x 1100	100 x 110 x 246	21	3	7
280	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
305	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
315	10	380 x 380 x 1100	110 x 114 x 243	18	3	6
356	10	430 x 430 x 1100	86 x 110 x 230	10	2	5
406	10	480 x 480 x 1100	100 x 110 x 207	8	2	4
457	10	520 x 520 x 1100	104 x 110 x 223	8	2	4
508	10	570 x 570 x 1100				
560	10	700 x 700 x 1100				
610	10	700 x 700 x 1100				
630	10	700 x 700 x 1100				
710	10	780 x 780 x 1100				
800	10	860 x 860 x 1100				


NOTES:




PACKAGING INFORMATION

ISO / SONOAFS-ALU 50mm



TRUCK PALLET						
						
Ø (mm)	Length (m)	Box Dimensions (mm)	Truck Pallet Dimensions (cm)	Boxes Per Pallet	Rows Per Pallet	Columns Per pallet
52	10					
68	10					
76	10					
82	10	185 x 185 x 1100	100 x 110 x 256	65	5	13
102	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
112	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
127	10	235 x 235 x 1100	100 x 110 x 250	40	4	10
133	10	235 x 235 x 1100	100 x 110 x 250	40	4	10
140	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
152	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
160	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
185	10	330 x 330 x 1100	100 x 100 x 246	21	3	7
203	10	330 x 330 x 1100	100 x 100 x 246	21	3	7
229	10	380 x 380 x 1100	100 x 114 x 243	18	3	6
254	10	380 x 380 x 1100	100 x 114 x 243	18	3	6
280	10	430 x 430 x 1100	86 x 110 x 230	10	2	5
305	10	430 x 430 x 1100	86 x 110 x 230	10	2	5
315	10	430 x 430 x 1100	86 x 110 x 230	10	2	5
356	10	480 x 480 x 1100	100 x 110 x 255	10	2	5
406	10	520 x 520 x 1100	104 x 110 x 223	8	2	4
457	10	570 x 570 x 1100				
508	10	700 x 700 x 1100				
560	10					
610	10					
630	10					
710	10					
800	10					

NOTES:

40' HC PALLET						
						
Ø (mm)	Length (m)	Box Dimensions (mm)	Truck Pallet Dimensions (cm)	Boxes Per Pallet	Rows Per Pallet	Columns Per pallet
52	10					
68	10					
76	10					
82	10	185 x 185 x 1100	100 x 110 x 237	60	5	12
102	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
112	10	205 x 205 x 1100	103 x 110 x 241	55	5	11
127	10	235 x 235 x 1100	100 x 110 x 250	36	4	9
133	10	235 x 235 x 1100	100 x 110 x 250	36	4	9
140	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
152	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
160	10	280 x 280 x 1100	84 x 110 x 239	24	3	8
185	10	330 x 330 x 1100	100 x 100 x 246	21	3	7
203	10	330 x 330 x 1100	100 x 100 x 246	21	3	7
229	10	380 x 380 x 1100	100 x 114 x 243	18	3	6
254	10	380 x 380 x 1100	100 x 114 x 243	18	3	6
280	10	430 x 430 x 1100	86 x 110 x 230	10	2	5
305	10	430 x 430 x 1100	86 x 110 x 230	10	2	5
315	10	430 x 430 x 1100	86 x 110 x 230	10	2	5
356	10	480 x 480 x 1100	100 x 110 x 207	8	2	4
406	10	520 x 520 x 1100	104 x 110 x 223	8	2	4
457	10	570 x 570 x 1100				
508	10	700 x 700 x 1100				
560	10					
610	10					
630	10					
710	10					
800	10					


NOTES:




PACKAGING INFORMATION

COMBIAFS



TRUCK PALLET						
						
Ø (mm)	Length (m)	Box Dimensions (mm)	Truck Pallet Dimensions (cm)	Boxes Per Pallet	Rows Per Pallet	Columns Per pallet
52	10	135 x 135 x 370	81 x 111 x 245	288	18	16
68	10	170 x 170 x 370	85 x 111 x 236	210	15	13
76	10	170 x 170 x 370	85 x 111 x 236	210	15	13
82	10	100 x 100 x 550	80 x 110 x 245	368	16	23
102	10	115 x 115 x 550	100 x 115 x 222	360	18	20
112	10	115 x 115 x 550	100 x 115 x 222	360	18	20
127	10	135 x 135 x 500	100 x 110 x 245	272	16	17
133	10	135 x 135 x 500	100 x 110 x 245	272	16	17
140	10	170 x 170 x 500	100 x 119 x 253	196	14	14
152	10	170 x 170 x 500	100 x 119 x 253	196	14	14
160	10	170 x 170 x 500	100 x 119 x 253	196	14	14
185	10	215 x 215 x 500	100 x 110 x 252	110	10	11
203	10	215 x 215 x 500	100 x 110 x 252	110	10	11
229	10	270 x 270 x 500	100 x 110 x 258	72	8	9
254	10	270 x 270 x 500	100 x 110 x 258	72	8	9
280	10	320 x 320 x 500	100 x 100 x 239	42	6	7
305	10	320 x 320 x 500	100 x 100 x 239	42	6	7
315	10	320 x 320 x 500	100 x 100 x 239	42	6	7
356	10	370 x 370 x 500	100 x 111 x 237	36	6	6
406	10	420 x 420 x 500	84 x 100 x 225	20	4	5
457	10	480 x 480 x 500	96 x 100 x 207	16	4	4
508	10	520 x 520 x 520	104 x 104 x 223	16	4	4
560	10	580 x 580 x 500				
610	10	640 x 640 x 500				
630	10	640 x 640 x 500				
710	10	720 x 720 x 500				
800	10	820 x 820 x 500				

NOTES:

40' HC PALLET						
						
Ø (mm)	Length (m)	Box Dimensions (mm)	Truck Pallet Dimensions (cm)	Boxes Per Pallet	Rows Per Pallet	Columns Per pallet
52	10	135 x 135 x 370	81 x 111 x 245	288	18	16
68	10	170 x 170 x 370	85 x 111 x 236	195	15	13
76	10	170 x 170 x 370	85 x 111 x 236	195	15	13
82	10	100 x 100 x 550	80 x 110 x 245	368	16	23
102	10	115 x 115 x 550	100 x 115 x 222	360	18	20
112	10	115 x 115 x 550	100 x 115 x 222	360	18	20
127	10	135 x 135 x 500	100 x 110 x 245	272	16	17
133	10	135 x 135 x 500	100 x 110 x 245	272	16	17
140	10	170 x 170 x 500	100 x 119 x 236	182	14	14
152	10	170 x 170 x 500	100 x 119 x 236	182	14	14
160	10	170 x 170 x 500	100 x 119 x 236	182	14	14
185	10	215 x 215 x 500	100 x 110 x 230	100	10	11
203	10	215 x 215 x 500	100 x 110 x 230	100	10	11
229	10	270 x 270 x 500	100 x 110 x 231	64	8	9
254	10	270 x 270 x 500	100 x 110 x 231	64	8	9
280	10	320 x 320 x 500	100 x 100 x 239	42	6	7
305	10	320 x 320 x 500	100 x 100 x 239	42	6	7
315	10	320 x 320 x 500	100 x 100 x 239	42	6	7
356	10	370 x 370 x 500	100 x 111 x 237	36	6	6
406	10	420 x 420 x 500	84 x 100 x 225	20	4	5
457	10	480 x 480 x 500	96 x 100 x 207	16	4	4
508	10	520 x 520 x 520	104 x 104 x 223	16	4	4
560	10	580 x 580 x 500				
610	10	640 x 640 x 500				
630	10	640 x 640 x 500				
710	10	720 x 720 x 500				
800	10	820 x 820 x 500				

NOTES:



A series of horizontal dashed lines spanning the width of the page, providing a template for handwriting practice.